

for contacts of insert series:	page:
CD (10A)	53-61
CDD (10A)	67-74
CDC (16A)	99-103
CCE (16A)	110-115
CQE (16A)	138-143
CQEE (16A)	146-147
CMCE (16A)	148-160
CQ (10A/16A)	165-168
CX 8/24 (16A/10A)	169
CX 6/36 * (10A)	170
CX 12/2 * (10A)	171
CX 6/6 * (16A)	175
MIXO (10A/16A)	185-203

* the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool turret heads - gauge



insertion tool - removal tools - replacement tip



description	part No.	part No.
crimping tool for 10A and 16A contacts DANIELS AF8 model (turret excluded)	CCPZ MIL	
turret heads (see note) - for 10A contacts (CDF and CDM series) - for 16A contacts (CCF and CCM series)	CCTP 10 CCTP 16	
"go / no go" control gauge to verify indenter closure (see note)	CCPNP	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0.75 mm ²		CCINA
removal tools for the extraction of contacts from the inserts - for 10A contacts ¹⁾ - for 16A contacts ²⁾		CCES CQES
replacement tip for CCES removal tool		CCPR RN

- for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
- for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A), CX6/6 (16A) and CDC. For CMCE (16+2), CX inserts (contacts 16A insert CX 8/24) using a flat 3 mm screwdriver.

Notes:

Positioning turret





conforms to international standard MIL-C-22520/1

- An interchangeable and indispensable accessory of the CCPZ MIL crimping tool, it precisely positions the contact where crimping is performed. Each series of contacts requires its own turret.

"go / no go" control gauge

conforms with international standard MIL-C-22520/3

- A tool used to periodically check that the crimping tool meets standard requirements.

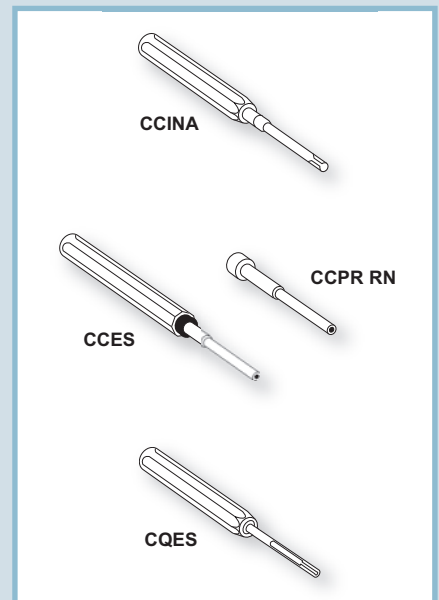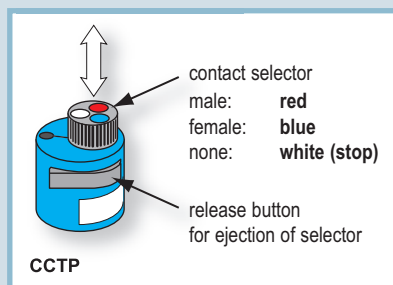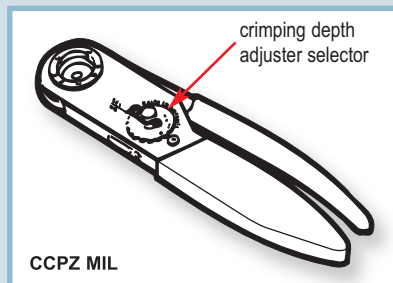

CCMA - CCFA CCMD - CCFD		0,14	0,25	0,34	0,5	0,75	1,0	1,5	2,5	3,0	4,0	conductor section
red	blue	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	AWG
male	female	26	24	22	20	18	17	16	14	12	12	
0,3	0,3	5	5	6								
0,5	0,5		6	7								
0,7	0,7			6	7							
1,0	1,0			6	7	7						
1,5	1,5				6	7	7	8				
2,5	2,5					6	6	7	7			
3,0	3,0							6	7	7		
4,0	4,0									7	8	

crimping depth
adjuster selector
CCTP 16

CDMA - CDFA CDMD - CDFD		0,14	0,25	0,34	0,5	0,75	1,0	1,5	2,5	conductor section
red	blue	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	AWG
male	female	26	24	22	20	18	17	16	14	
0,3	0,3	5	5	6						
0,5	0,5			6						
0,7	0,7				6					
1,0	1,0					6				
1,5	1,5						7			
2,5	2,5							7		

crimping depth
adjuster selector
CCTP 10