


10W DIY AC to DC Converter - PCB Mount

multicomp PRO

10W, DIY AC/DC converter

**RoHS
Compliant**

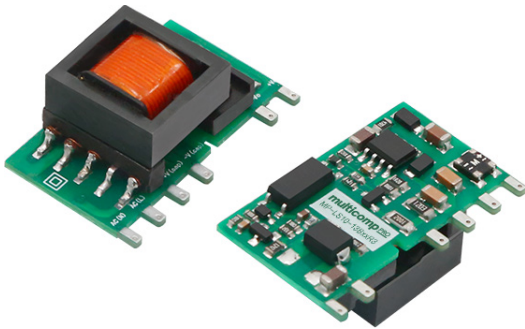

Features

- Ultra-wide 85 - 305VAC and 100 - 430VDC input voltage range
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range -40°C to +85°C
- Multi application, flexible layout
- Compact size, high power density, green power
- No-load power consumption as low as 0.1W
- Output short circuit, over-current protection
- Designed to meet IEC/EN61558, IEC/EN60335 standards
- Designed to meet IEC/EN/UL62368 standards (Approval pending)

Description

MP-LS10-13BxxR3 series is one of highly efficient green power AC-DC Converter series. They feature wide input range accepting either AC or DC voltage, high efficiency, low power consumption and Class II reinforced insulation. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which have high requirement for dimension and don't have high requirement on EMC. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Part Number	Output Power	Nominal Output Voltage and Current	Efficiency at 230V AC (%) Typ.	Capacitive Load (μF) Max.
MP-LS10-13B03R3	6.6W	3.3V/2000mA	73	1500
MP-LS10-13B05R3	10W	5V/2000mA	77	1500
MP-LS10-13B09R3		9V/1100mA	80	1000
MP-LS10-13B12R3		12V/830mA	82	680
MP-LS10-13B24R3		24V/420mA	83	330

Note: 1. The nominal output voltage refers to the voltage applied to the load terminal after adding external circuits.
2. If the product is used in a severe vibration application, it needs to be glued and fixed.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	-	305	V AC
	DC input	100		430	V DC
Input Frequency		47			63
Input Current	115V AC	-		0.3	A
	230V AC			0.18	
Inrush Current	115V AC		15	--	
	277V AC		30	--	
Recommended External Input Fuse		1A, slow-blow, required (The actual use needs to be selected according to the application environment)			
Hot Plug		Unavailable			

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

10W DIY AC to DC Converter - PCB Mount

multicomp PRO

Output Specifications						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	3.3V		--	±3	-	%
	V/9V/12V/24V		--	±2	-	
Line Regulation	Rated load		--	±1	-	
Load Regulation	0%-100% load		--	±1.5	-	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		--	80	150	mV
Temperature Coefficient			--	±0.02	--	%/°C
Stand-by Power Consumption	230V AC	3.3V/5V	--	0.05	0.1	W
		9V/12V	--	0.09	0.12	
		24V	--	0.13	0.15	
Short-circuit Protection			Hiccup, continuous, self-recovery			
Over-current Protection			≥110%Io, self-recovery			
Over-voltage Protection	3.3/5VDC output		≤9VDC (Output voltage clamp or hiccup)			
	9VDC output		≤15VDC (Output voltage clamp or hiccup)			
	12VDC output		≤16VDC (Output voltage clamp or hiccup)			
	24VDC output		≤32VDC (Output voltage clamp or hiccup)			
Minimum Load			0	-	-	%
Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input-Output	Electric Strength Test for 1min, leakage current <5mA	3000	-	-	V AC
Operating Temperature			-40	-	+85	°C
Storage Temperature				-	+105	
Storage Humidity			-	-	95	%RH
Power Derating	-55°C to +85°C		205	-	-	%°C
	85V AC to 100V AC		1	-	-	
	277V AC to 305V AC		0.54	-	-	%V AC
Safety Standard			IEC/EN/UL62368, IEC/EN60335, IEC/EN61558			
Safety Certification			IEC/EN/UL62368 (Pending)			
Safety Class			CLASS II			
MTBF			MIL-HDBK-217F@25°C>1000,000 h			

Mechanical Specifications

Case Material	32mm × 17.2mm × 15.5mm
Weight	8.2g (Typ.)
Cooling Method	Free air convection

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro



multicomp PRO

10W DIY AC to DC Converter - PCB Mount





Electromagnetic Compatibility (EMC)				
Emissions	CE	CISPR32/EN55032	CLASS A (Application circuit 1, 4)	
		CISPR32/EN55032	CLASS B (Application circuit 2, 3)	
	RE	CISPR32/EN55032	CLASS A (Application circuit 1, 4)	
		CISPR32/EN55032	CLASS B (Application circuit 2, 3)	
Immunity	ESD	IEC/EN61000-4-2	Contact ± 6 KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	± 2 KV (Application circuit 1, 2)	perf. Criteria B
		IEC/EN61000-4-4	± 4 KV (Application circuit 3, 4)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ± 1 KV (Application circuit 1, 2)	perf. Criteria B
		IEC/EN61000-4-5	line to line ± 2 KV (Application circuit 3, 4)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B	

Product Characteristic Curve

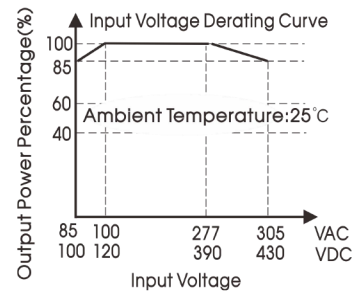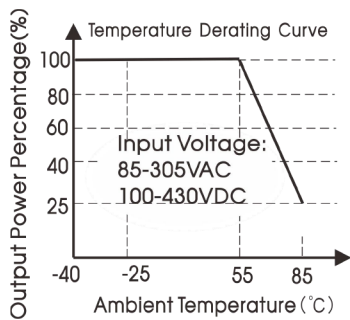


Note:

- 1 With an AC input between 85 -100V AC/277- 305V AC and a DC input between 100 - 120V DC/390 - 430V DC, the output power must be derated as per temperature derating curves;
- 2 This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

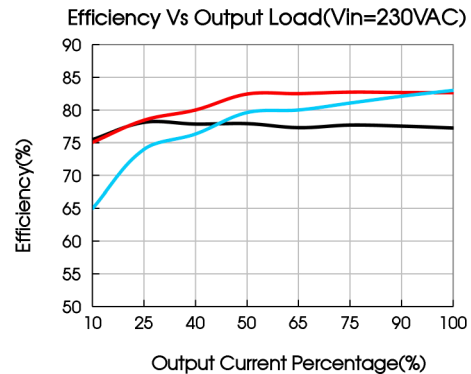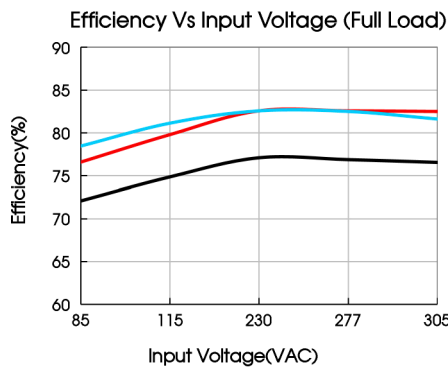

10W DIY AC to DC Converter - PCB Mount

Additional Circuits Design Reference

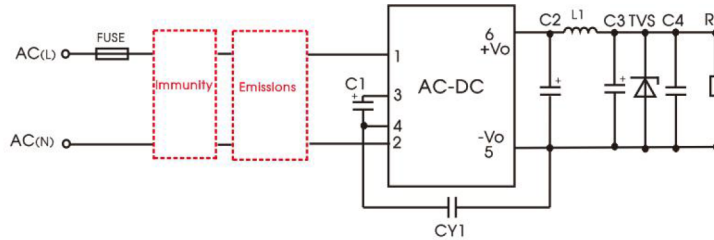

LS series additional circuits design reference

Part Number	C1(required)	C2 (required)	L1 (required)	C3 (required)	C4	CY1 (required)	TVS
MP-LS10-13B03R3	22 μ F/450V	820 μ F/16V (solid-state capacitor)	2 μ H/15m Ω Max/6.5A	150 μ F/35V	0.1 μ F/50V	1nF/ 400VAC	SMBJ7A
MP-LS10-13B05R3		27 μ F/16V (solid-state capacitor)					SMBJ12A
MP-LS10-13B09R3				SMBJ20A			
MP-LS10-13B12R3				SMBJ30A			
MP-LS10-13B24R3				470uF/35V			

Note:

- C1 is used as filter capacitor with AC input (must be connected externally) and as EMC filter capacitor with DC input (must be connected), and it is recommended to use the capacitor with ripple current >300mA@100KHz.
- We recommend using an electrolytic capacitor with high frequency and low ESR rating for C3 (refer to manufacture's data-sheet), electrolytic capacitor can be used for C2 when applied in normal and high temperature environments. Combined with C2, L1, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%, C4 is a ceramic capacitor, used for filtering high frequency noise.
- A suppressor diode (TVS) is recommended to protect the application in case of a converter failure and specification should be 1.2 times of the output voltage.

Environmental Application EMC Solution


LS series environmental application EMC solution selection table						
Recommended circuit	Application environmental	Typical industry	Input voltage range	Environment temperature	Emissions	Immunity
1	Basic application	None	85V AC to 305V AC	-40°C to +85°C	CLASS A	CLASS III
2	Indoor civil environment	Smart home/Home appliances (2Y)		-25°C to +55°C	CLASS B	CLASS III
	Indoor general environment	Intelligent building/Intelligent agriculture		-25°C to +55°C	CLASS B	CLASS IV
3	Indoor industrial environment	Manufacturing workshop		-40°C to +85°C	CLASS A	CLASS IV

10W DIY AC to DC Converter - PCB Mount

Immunity design circuits for reference		Emissions design circuits for reference	
CLASS III	CLASS IV	CLASS A	CLASS B

Electromagnetic Compatibility Solution--Recommended Circuit

1. Application circuit 1—Basic application

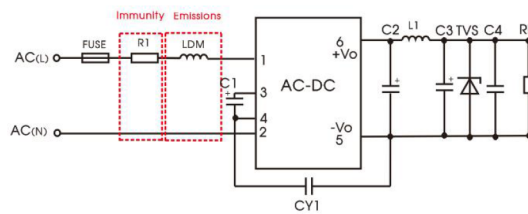


Recommended circuit 1

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Basic application	-40°C to +85°C	CLASS III	CLASS A

FUSE (required)	1A/300V, slow-blow
R1 (required)	6.8Ω/3W
LDM	2.2mH/Max: 4Ω/Min: 0.24A

2. Application circuit 2—Indoor civil /Universal system recommended circuits for general environment

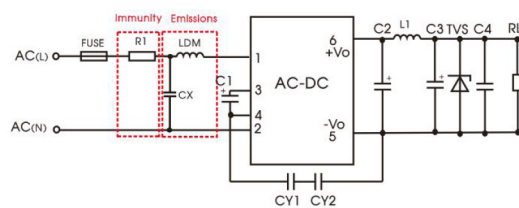

Recommended circuit 2


Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor civil /general	-25°C to +55°C	CLASS III	CLASS B

10W DIY AC to DC Converter - PCB Mount

Component	Recommended value
FUSE (required)	1A/300V, slow-blow
R1	6.8Ω/3W
CY1(CY2)	1nF/400V AC
LDM	2.2mH/Max: 4Ω/Min: 0.24A
CX	0.1μF/310VAC

Note 1: To meet the IEC/EN60335 certification, the two Y capacitors of the primary and secondary need to be externally connected (CY1/CY2, value at 2.2nF/250VAC);
 Note 2: According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than 3.8MΩ, and the actual need to be selected according to the certification standard.

3. Application circuit 3—Universal system recommended circuits for indoor industrial environment

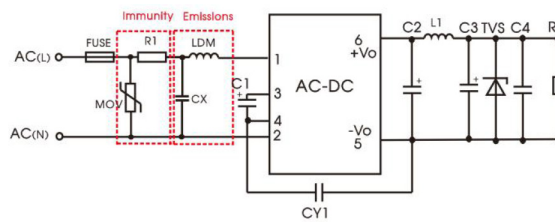

Recommended circuit 3

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor industrial	-25°C to +55°C	CLASS IV	CLASS B


Component	Recommended value
FUSE (required)	2A/300V, slow-blow
MOV	S14K350
CY1	1nF/400VAC
CX	0.1μF/310VAC
LDM	2.2mH/Max: 4Ω/Min: 0.24A
R1	6.8Ω/3W

Note: According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than 3.8MΩ, and the actual need to be selected according to the certification standard.

10W DIY AC to DC Converter - PCB Mount



4. Application circuit 4—Universal system recommended circuits for outdoor general environment

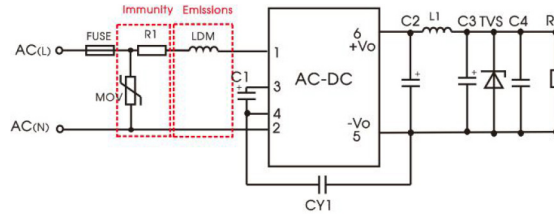



Recommended circuit 4

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Outdoor general environment	-40°C to +85°C	CLASS IV	CLASS A

Component	Recommended value
FUSE (required)	2A/300V, slow-blow
MOV	S14K350
LDM	2.2mH/Max: 4Ω/Min: 0.24A
R1	6.8Ω/3W

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

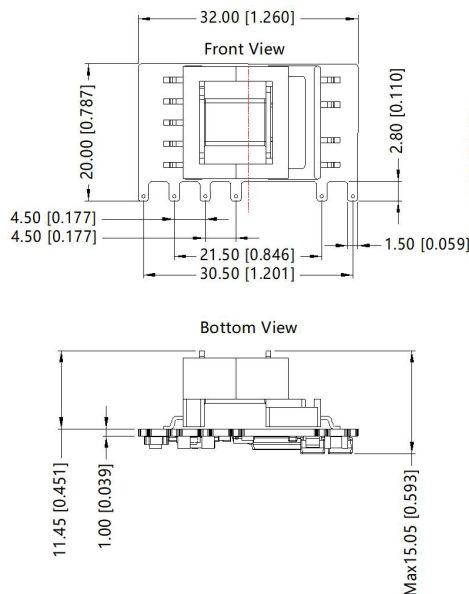

Note: Grid 2.54*2.54mm

Pin	Function
1	AC(N)
2	AC(L)
3	+V(CAP)
4	-V(CAP)
5	-Vo
6	+Vo

Note:
Unit: mm[inch]
General tolerances: ±1.00[±0.039]
The layout of the device is for reference only ,
please refer to the actual product

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

