

Type 3521 Series

Key Features

- 2 Watts at 70°C
- Small Size to Power Ratio
- Supplied on Tape
- Available via Distribution
- Value Marked on Resistor
- 500 Volt Maximum Overload
- 250 Volt Working Voltage
- Low Profile
- Terminal Finish - Matte Sn over Ni
- MSL Level 2



TE Connectivity is pleased to introduce this low cost high power device, suitable for auto placement in volume, and for most applications, including high frequency operations, owing to the short lead structure. It is attractively priced and available on 7" reels of 4000 pieces.

Characteristics - Electrical


Power Rating:	2 Watts at 70°C**
Max. RCWV*:	250V
Max. Overload Voltage:	500V
Resistance Tolerance(%):	±1%
Resistance Range:	1R0 - 1M0
Temperature Coefficient:	<10R = ±200PPM 10R - 1M0 = ±100PPM >1M0 = ±200PPM
Operating Temperature:	-55°C - 155°C

* Rated continuous working voltage (RCWV) shall be determined from

$$RCWV = \sqrt{\text{Rated Power} \times \text{Resistance Value}}, \text{ or Maximum RCWV listed above, whichever is less}$$

** Recommended Circuit Board Design - If this device is anticipated to run at full continuous power then action to improve the cooling should be taken. This can be a metal substrate, copper pad left under the chip, an opening in the PCB or enlarged silver conductor pads each end.


Power Derating Curve

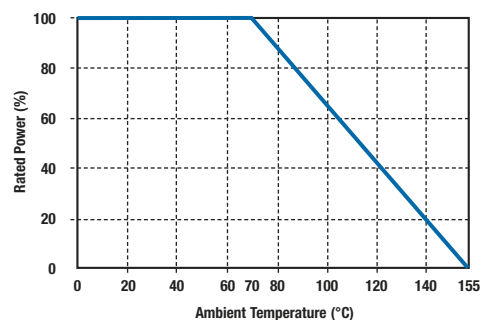

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with this curve.

Type 3521 Series

Dimensions

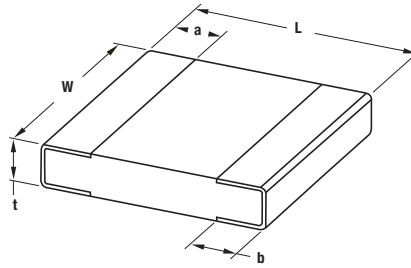

L	W	a	b	t
6.30	3.20	0.60	0.50	0.55
±0.20	±0.20	±0.20	±0.20	±0.10

Marking

4 digit marking system. First three digits are significant figures of resistance, fourth denotes number of zeros eg. 3302 = 33K – 33,000Ω.

For values below 10Ω the letter R is used as decimal point eg. 1R20 = 1R2 = 1.2Ω

Handling Recommendations

When flow soldering - the land width must be smaller than the Chip Resistor width to properly control the solder application. Generally, the land width can be Chip Resistor width (W) x 0.7 to 0.8. When reflow soldering - solder application amount can be adjusted. Thus the land width can be set to W x 1.0 to 1.3.

How to Order

3521	1K0	F	T
Common Part	Resistance Value	Tolerance	Pack Style
3521	1 ohm 1000 milli ohms 1R0 1K ohm 1000 ohms 1K0 1 Meg ohm 1000000 ohms 1M0	F - 1%	T - 4000 / reel

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.
Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.