

Honeywell



392550K

392 Series Industrial Potentiometer, Conductive Plastic Element, PC Terminals, 0.5 W Power Rating, 50 kOhm Resistance Value

Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

Features

- Compact - 12,7 mm [0.5 in] diameter
- Conductive plastic element
- Linear taper
- Trimmer style
- PC terminals

Typical Applications

- Manual controls
- Medical equipment
- Telecommunications

Description

The 392 Series is a 1/2 watt potentiometer with a conductive plastic element and a molded housing. It offers an internal shaft seal for moisture protection and PC style terminals.

Honeywell

392550K

392 Series Industrial Potentiometer, Conductive Plastic Element, PC Terminals, 0.5 W Power Rating, 50 kOhm Resistance Value


Product Specifications	
Potentiometer Type	Industrial
Element Type	Conductive Plastic
Terminal Type	PC
Power Rating	0.5 W
Resistance Value	50 kOhm
Resistance Tolerance	± 10 %
Linearity	± 5 %
Shaft Diameter	3,18 mm [0.125 in]
Shaft Ending	Slotted
Body	12.7 mm [0.5 in] diameter, ± 0.79 mm [0.031 in]
Electrical Taper	Linear
Operating Temperature	-40 °C to 120 °C [-40 °F to 248 °F]
Working Voltage (Max.)	350 V

Rotational Life	50000 cycles
Mechanical Rotation	295°
Availability	Global
Series Name	392 Series
UNSPSC Code	4111363300
UNSPSC Commodity	4111363300 Potentiometers

Honeywell

392550K

392 Series Industrial Potentiometer, Conductive Plastic Element, PC Terminals, 0.5 W Power Rating, 50 kOhm Resistance Value

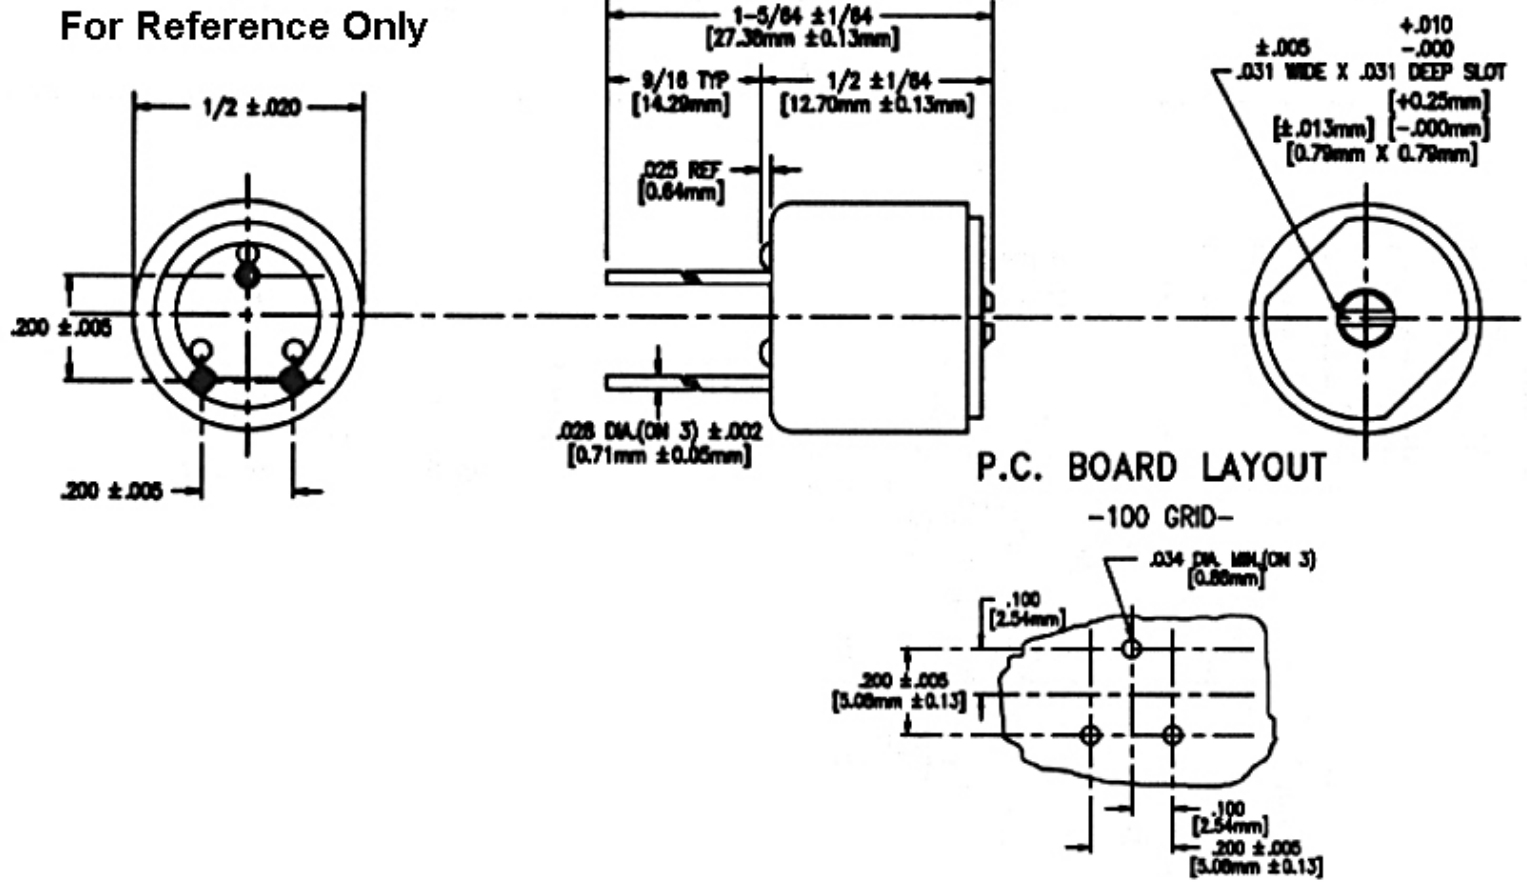

Honeywell

392550K

392 Series Industrial Potentiometer, Conductive Plastic Element, PC Terminals, 0.5 W Power Rating, 50 kOhm Resistance Value

 WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

 WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

© Copyright Honeywell Inc. 1998-2004 All rights reserved.