



7111 | 7111HV

The 7111 series counter is feature packed with an unrivalled performance ratio, suitable for thousands of applications








191 (E

Key Features

- Use of the latest CMOS circuitry achieves an expected battery life of 10 years.
- Connection using built in screw terminals (on all models).
- 9mm black high contrast LCD display.
- Backlight (externally powered) 5VDC.
- Counting up to 10kHz. (7111)
- 7111HV permits triggering from any voltage between 10-240VAC or 10VDC-110VDC ±10%.
- Contact closure/open collector low speed count input with integral de-bounce circuitry (7111 model).
- Choice of mounting available, front panel with supplied bezel or rear mounting clip.
- Front panel can be sealed to IP65.
- Installation is simplified all models have screw connections on rear for quick and simple connection.
- CE, UL and cUL approved.

Applications

- Replacement for electro-mechanical counters
- Applications where external power is not readily available.
- Position, length, rotation and distance measuring applications.
- **Event counting**
- Water meters remote display

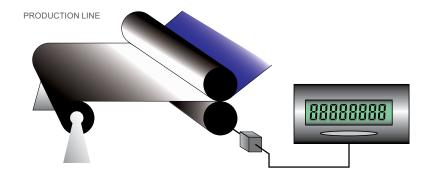





Water Meter Wiring

Our most popular remote display for water meters is the 7111 counter. It is easy to install with a two wire hookup.



Common Specifications

Battery Non-replaceable Lithium battery, expected life10 years at 20°C

Display 8 digit black LCD, 9mm characters, leading zero blanking, backlight requires external 5VDC supply. Configurable

decimal place upto 3 dec place (jumper link configured).

Count Range 99999999 - rollover to 0

Connections Finger-proof screw connections for cables up to 1.5mm2

Operating temperature -10°C to $+60^{\circ}\text{C}$ (14°F to 140°F) Storage temperature -20°C to $+60^{\circ}\text{C}$ (-4°F to 140°F)

Altitude Up to 2000m

Relative Humidity 80% max up to 31°C, decreasing to 50% max at 40°C

Sealing IP65/NEMA4X

Mounting Either with clip mount supplied or two front screws with bezel supplied.

Manual Reset Enable Configured by jumper link

Packed Weight 62 grammes

Box Dimensions 56mm x 44mm x 62mm

Specifications 7111

Direction Input Connection or electronic input TTL/CMOS compatible. Add=no connection or >2.4v (logic 1); Subtract=connect to

COMMON or <0.7v (logic 0). Direction input must precede count input by 5µS (minimum) for valid operation.

External Reset Contact closure/open collector, negative edge triggered, 0.7v threshold, 15mS minimum closure time.

Low Speed Count Input Contact closure/open collector with integral de-bounce circuitry. 30Hz maximum, negative edge triggered, 0.7v

threshold, 15mS minimum closure time. Max 18VDC.

High Speed Count Input Electronic input 10kHz maximum, negative edge triggered, 0.7v threshold 50µS minimum pulse length, TTL/CMOS

Compatible. Max 18VDC.

Specifications 7111HV

External Reset 10-110VDC ±10%, 10-240VAC ±10%, 50mS minimum length.

Direction Input

Connection or electronic input TTL/CMOS compatible. Add=no connection or >2.4v (logic 1); Subtract=connect to COMMON or <0.7v (logic 0). Direction input must precede count input by 5µS (minimum) for valid operation. Max 18VDC.

Count Input 10-110VDC± 10%, 10-240VAC± 10%, 50mS minimum pulse width, 10Hz.

Part Numbers:

7111 Totalising counter
7111HV Counter with HV inputs



Trumeter (The Americas)
6601 Lyons Rd, Suite H-7
Coconut Creek, Florida
FL 33073,
USA
Tel: +1 954 725 6699
Email: sales.usa@trumeter.com

Trumeter (Europe)
Pilot Mill
Alfred Street
Bury,
BL9 9EF
Tel: +44 161 674 0960
Email: sales.uk@trumeter.com

Innovative Design Technologies Sdn. Bhd Lot 5881, Lorong Iks Bukit Minyak 1 Taman Perindustrian Iks, 14000 Bukit Tengah Penang, Malaysia Web: www.idtworld.com Tel: + 604 5015700 Email: sales.my@idtworld.com