


# Power Metering Socket - US



RoHS  
Compliant

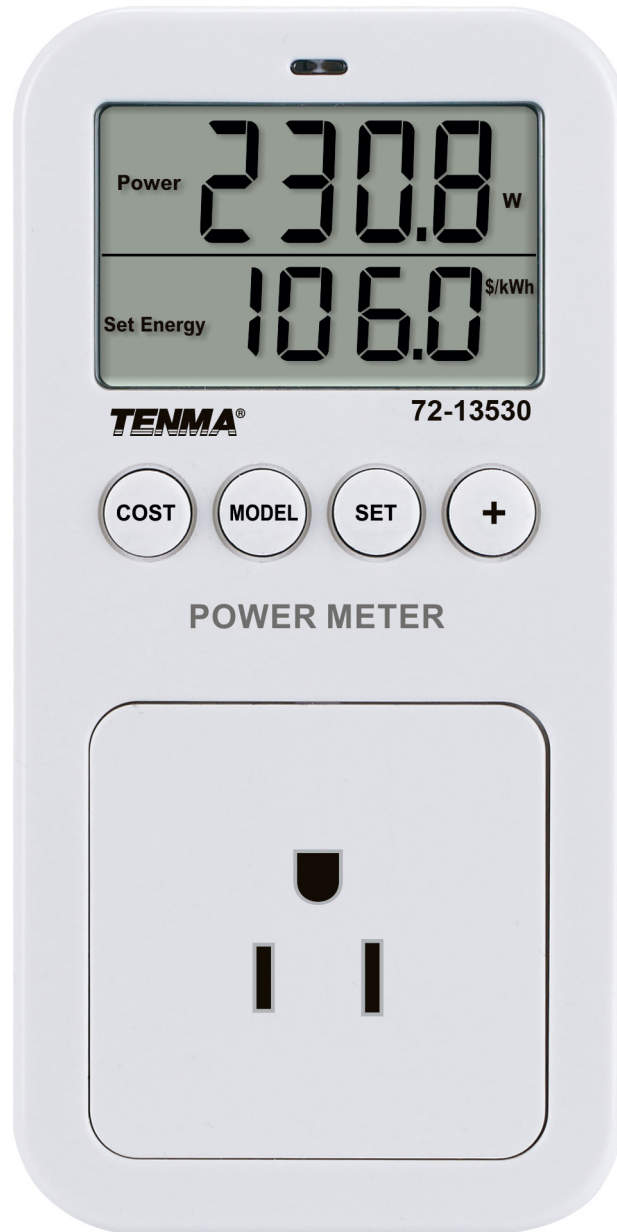

## Features

- Clear LCD Dual Display
- Current Overload Protection
- User Defined Electricity Cost Calculation
- CO Emissions Measurement
- Built-In Button Battery with Power-Off Memory Function
- Passed 10000 Socket Insertion Force Tests

[www.element14.com](http://www.element14.com)  
[www.farnell.com](http://www.farnell.com)  
[www.newark.com](http://www.newark.com)  
[www.cpc.co.uk](http://www.cpc.co.uk)



# Power Metering Socket - US



## Electrical Specifications

Parameter	Range
Voltage	100.0V ~ 150.0V $\pm 1\%$
Current	0A ~ 16.00A $\pm 1\%$
Frequency	60Hz
Power	0 ~ 1800W $\pm 1\%$
Power Factor	0 ~ 1.00 $\pm 2\%$
Energy Consumption	0 ~ 9999kWh $\pm 1\%$
Unit Price of Electricity	0.00 ~ 99.99 (\$/kWh)
Accumulative Time	0 minute ~ 9999 days
Accumulative Charge	0 ~ 9999\$
Power Consumption	< 0.4W
Overload Indication	> 15A

## General Characteristics

Safety Rating	: CAT II 150V
Power	: 3.0V Button Battery
Colour	: White
Weight	: 140g
Dimensions	: 130mm × 65mm × 59mm

## Accessories

Battery and Instruction Manual

## Part Number Table

Description	Part Number
Power Metering Socket – US	72-13530

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.

[www.element14.com](http://www.element14.com)  
[www.farnell.com](http://www.farnell.com)  
[www.newark.com](http://www.newark.com)  
[www.cpc.co.uk](http://www.cpc.co.uk)

