

# Banana Plug, 36A, Screw



RoHS  
Compliant



## Designation

Do-it-Yourself (DIY). Stacking 4mm Banana (male) Plug.  
Solderless screw wire attachment.

## Applications

In-the-field repairing and making of 4mm banana leads.

## Characteristics

Electrical Safety  
1000V CAT II  
600V CAT III  
300V CAT IV

: According to EN / IEC 61010-031:2008. Up to 1000 V CAT II / 600 V CAT III / 300 V CAT IV, reinforced insulation, up to 36A (at +40°C) depending on the wire.

According to EN / IEC 60529. IP2X (touchproof). These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are:

Pollution degree, 1 or 2;

Relative humidity, 80% maximum for temperatures up to 31°C decreasing linearly to 50% relative humidity at +40°C;

Temperature range, +5°C to +40°C;

Indoor use; and altitude, 2000m maximum.

The electrical safety provided by the plug depends on:

The specifications of the wire;

The electrical safety of the wire (typically 1000 V CAT II / 600 V CAT III / 300 V CAT IV, reinforced insulation, according to EN / IEC 61010-031:2008);


The right assembling of the plug on the wire.

Operating Temperature : -20°C to +80°C

Materials : Conductors: Nickel-coated brass  
Wire jackets: PVC

Colour : Red

## Diagram

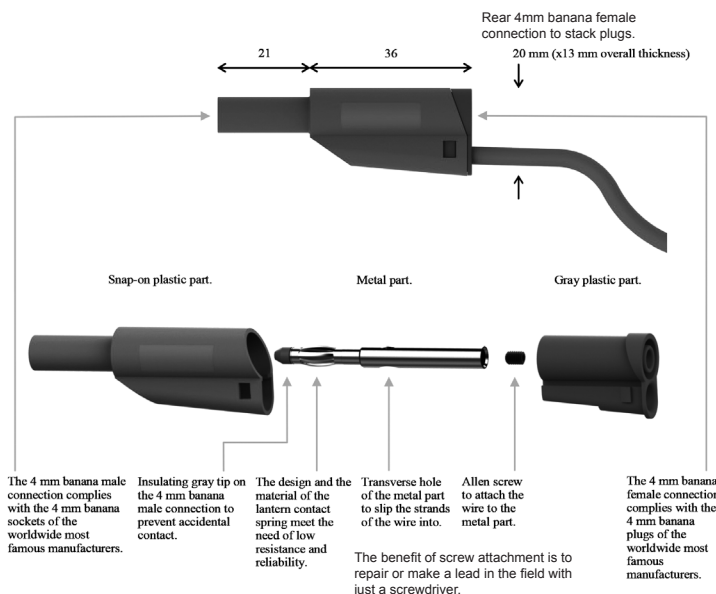

Dimensions : Millimetres



# Banana Plug, 36A, Screw



## Part Number Table

Description	Colour	Part Number
Banana Plug, 36A, Screw	Black	76-1276

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.

