### **Product data sheet**


# Miniature connectors




Product description M16 IP67 cable connector, Contacts: 3 DIN, 6.0 - 8.0 mm, shieldable, solder, IP67, UL

M16 IP67 series 423 Order number 99 5605 15 03







You can find the component part drawing and assembly instructions on the next page.

# **Technical data**

### **General values**

Connector design Connector locking system Termination Wire gauge (mm) Wire gauge (AWG) Cable outlet Upper limit temperature Lower limit temperature Customs tariff number Packaging Unit

### **Cable data**

Approval 1

cable connector screw solder 0.75 mm<sup>2</sup> 6.0 - 8.0 mm 95 ℃ − 30 °C 85369010

UL

30

### **Electrical values**

Rated current (40 °C) 7 A Rated voltage 250 V Rated impulse voltage 1500 V Pollution degree Overvoltage category Insulating material group Ш  $\geq 10^{10} \, \Omega$ Insulation resistance EMC compliance shieldable Degree of protection IP67 > 500 Mating cycles Mechanical operation

### Material

Contact material CuZn (brass) Ag (silver) Contact plating PBT (UL94 V-0) Contact body material


### **Product data sheet**

# Miniature connectors



Product description M16 IP67 cable connector, Contacts: 3 DIN, 6.0 - 8.0 mm, shieldable, solder, IP67, UL

Area **M16 IP67 series 423**Order number **99 5605 15 03** 

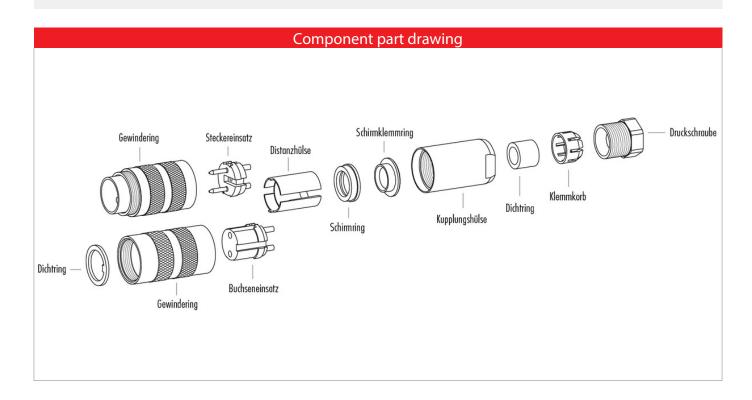

# Gerade Version (Ausführung mit Schirmklemmring) 1. Druckschraube, Klemmkorb, Dichtung, Distanzhülse und ersten Schirmklemmring auffädeln. 2. Litzen obisolieren, Schirm ausmmenschieben und überstehenden Schirm zusammenschieben und überstehenden Schirm abschneiden. 4. Übrige Teile gemäß Darstellung montieren.



### Product data sheet

# Miniature connectors



Product description M16 IP67 cable connector, Contacts: 3 DIN, 6.0 - 8.0 mm, shieldable, solder, IP67, UL

Area **M16 IP67 series 423**Order number **99 5605 15 03** 

## Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors used in electrical circuits containing hazardous life parts must only be assembled and used by or under the supervision of persons with the requisite electrotechnical training, taking the applicable regulations and standards into account.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

The connector is not suitable for mains voltages. Please observe the pollution degrees and the overvoltage category. For further information refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).