

Specifications

■ Coil Ratings

Item	Standard, high-capacity, or quick-connect terminals			High-sensitivity		
	5 VDC	12 VDC	24 VDC	5 VDC	12 VDC	24 VDC
Rated current	40 mA	16.7 mA	8.3 mA	30 mA	12.5 mA	6.25 mA
Coil resistance	125 Ω	720 Ω	2,880 Ω	167 Ω	960 Ω	3,840 Ω
Must operate voltage	75% max. of rated voltage			80% max. of rated voltage		
Must release voltage	10% min. of rated voltage					
Max. voltage	150% (standard)/130% (high-capacity, quick-connect terminals) of rated voltage (at 23°C)			150% (at 23°C)		
Power consumption	Approx. 200 mW			Approx. 150 mW		

■ Contact Ratings

Item	Standard		High-sensitivity		High-capacity, or quick-connect terminals	
	Resistive load	Inductive load (cosφ = 0.4, L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4, L/R = 7 ms)	Resistive load	Inductive load (cosφ = 0.4, L/R = 7 ms)
Contact Material	AgSnIn		AgSnIn		AgSnIn	
Rated load	10 A at 250 VAC; 10 A at 30 VDC	3 A at 250 VAC; 3 A at 30 VDC	10 A at 250 VAC; 10 A at 30 VDC	3 A at 250 VAC; 3 A at 30 VDC	15 A at 110 VAC; 10 A at 30 VDC	5 A at 110 VAC; 3 A at 30 VDC
Rated carry current	10 A		10 A		15 A	
Max. switching voltage	250 VAC, 125 VDC					
Max. switching current	10 A		10 A		15 A	
Max. switching	2,500 VA, 300 W	750 VA, 90 W	2,500 VA, 300 W	750 VA, 90 W	2,500 VA, 300 W	750 VA, 90 W
Max. switching	100mA at 5VDC					
Failure rate (reference value)	100mA at 5VDC					

■ Characteristics

Contact resistance	30 mΩ max. (Quick-connect terminals type: 100 mΩ max.)	
Operate time	10 ms max. (High-sensitivity type: 15 ms max.)	
Release time	10 ms max.	
Insulation resistance	1,000 MΩ min.	
Dielectric strength	2,500 VAC, 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity	
Insulation Distance	Creepage (Typ)	3.5 mm
	Clearance (Typ)	2.8 mm
Tracking Resistance (CTI)	250 V	
Impulse withstand voltage	4,500 V (1.2 x 50 μs) between coil and contacts	
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude) Malfunction: 10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)	
Shock resistance	Destruction: 1,000 m/s ² Malfunction: 200 m/s ²	
Endurance	Mechanical: 20,000,000 operations min. at 18,000 operations/hr Electrical: 300,000 operations min. (100,000 operations min. for Fully sealed Type) at 1,200 operations/hr under rated load of 10 A at 250 VAC; 100,000 operations min. under load of 15 A at 110 VAC for high-capacity models 100,000 operations min. at 1,200 operations/hr under rated load of 10 A at 30 VDC	
Ambient temperature	Operating: -25°C to 70°C (with no icing)	
Ambient humidity	Operating: 5% to 85%	
Weight	Approx. 8 g (for TP model: Approx. 9.6 g)	

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
2. Operating characteristics are measured at a coil temperature of 23°C.

PCB Power Relay – G5CA

■ Approved Standards

UL Standard: UL508 (File No. E41515)

CSA Standard: CSA C22.2 No. 14 (File No. LR31928)

Model	No of Poles	Coil Rating	Contact Rating	No of Operations
G5CA	1	3 to 100VDC	15A, 125VAC (General Purpose) 10A, 250VAC (General Purpose) 15A, 250VDC (Resistive) 10A, 30VDC (Resistive)	100,000


EN Standard/TUV Certified:

EN61810-1 (Certification No. R50030053)


Model	No of Poles	Coil Rating	Contact Rating	No of Operations
G5CA	1	3, 5, 6, 12, 24, 48VDC	15A, 125VAC ($\cos\phi = 1.0$) 10A, 250VAC ($\cos\phi = 1.0$) 10A, 30VDC (0ms)	100,000

■ Engineering Data


Maximum Switching Power




Endurance




Ambient Temperature vs. Maximum Coil Voltage



Operating Temperature vs. Must-operate/Must-release Voltage



Malfunction Shock



No. of samples: 10
 Measured value: The value at which malfunction occurs in the contact when the contact is subjected to shock three times each in six directions for three axes.
 Standard: 200 m/s²


Note: The "maximum voltage" is the maximum voltage that can be applied to the relay coil.

Dimensions


Note: 1. All units are in millimetres unless otherwise indicated.

2. Orientation marks are indicated as follows:


G5CA-1A(-E) G5CA-1A4(-H)

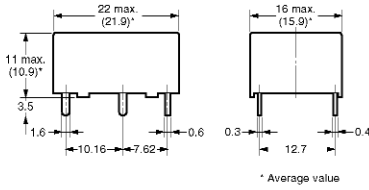



Mounting Holes (PCB) (BOTTOM VIEW) Tolerance: ± 0.1 mm




Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




G5CA-1A-TP-E

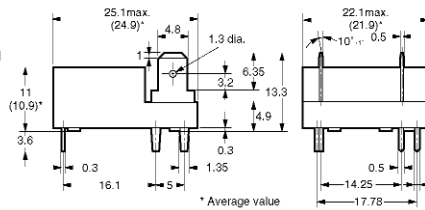

Mounting Holes (BOTTOM VIEW) Tolerance: ± 0.1 mm



Terminal Arrangement/ Internal Connections (BOTTOM VIEW)




Precautions

■ Precautions for Correct Use

Installation

Make sure that sufficient space is provided between relays when installing two or more relays side by side to facilitate heat dissipation. Insufficient heat dissipation may result in the relay malfunctioning.



Quick-connect Terminal Connections

- Do not pass current through the PCB of the load contact terminals (quick-connect terminals).
- The terminals are compatible with Faston receptacle #187 and are suitable for positive-lock mounting.

Use only Faston terminals with the specified numbers. Select leads for connecting Faston receptacles with wire diameters that are within the allowable range for the load current. Do not apply excessive force to the terminals when mounting or dismantling the Faston receptacle.

Insert and remove terminals carefully one at a time. Do not insert terminals on an angle, or insert/remove multiple terminals at the same time.


The following positive-lock connectors made by AMP are recommended. Contact the manufacturer directly for details on connectors including availability.

Type	Type Receptacle terminals (See note.)	Positive housing
#187 terminals (width: 4.75 mm)	AMP 170330-1 (170324-1) AMP 170331-1 (170325-1) AMP 170332-1 (170326-1)	AMP 172074-1 (natural color) AMP 172074-4 (yellow) AMP 172074-5 (green) AMP 172074-6 (blue)

Note: The numbers shown in parentheses are for air-feeding

Charged Terminals

The section marked with dotted circles (indicated by arrows) in the following diagram includes the charged terminals of the relay. When the relay is mounted on a PCB, make sure that there are no metal patterns on the section of the PCB facing the portion of the relay shaded in the following diagram.



Other Precautions

- The G5CA is a power relay designed for applications switching power loads such as heaters in electric household appliances. Do not use the G5CA to switch micro loads less than 100 mA, such as in signal applications.
- Use fully sealed models if the relays will require washing. Flux protection models may malfunction or the relay's performance may be otherwise adversely affected if cleaning fluid enters the relay.

ALL DIMENSIONS SHOWN ARE IN MILLIMETRES.

To convert millimetres into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.