

# OKA Door Mounting Kit for KU Switches

Designed for fast and easy assembly.

Environmental ratings: IP65; 3 padlock locations.





Shown with switch and display plate.  
(sold separately)



Lockable with up to 3 padlocks.




Drill  
Template &  
Instructions  
Included

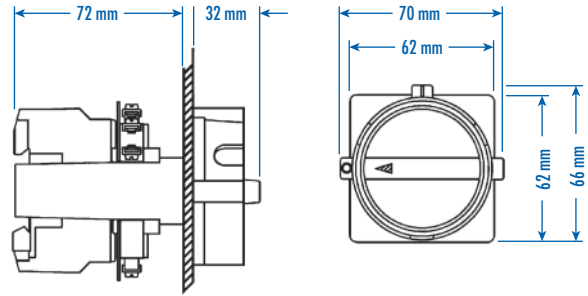

Cat. No. (Black Handle)	Cat. No. (Yellow/Red Handle)	No. of aux. switches	For use with
OKA 0.V	OKA 0.V Y/R	0	3 Pole KU switch
OKA 1.V	OKA 1.V Y/R	1	3 Pole KU switch
OKA 2.V	OKA 2.V Y/R	2	3 Pole KU switch

## Assembly Instructions


Use the enclosed drill template to prepare the door for door mounting kit assembly. Discard the switch handle on the disconnect switch and follow photo-illustration below.

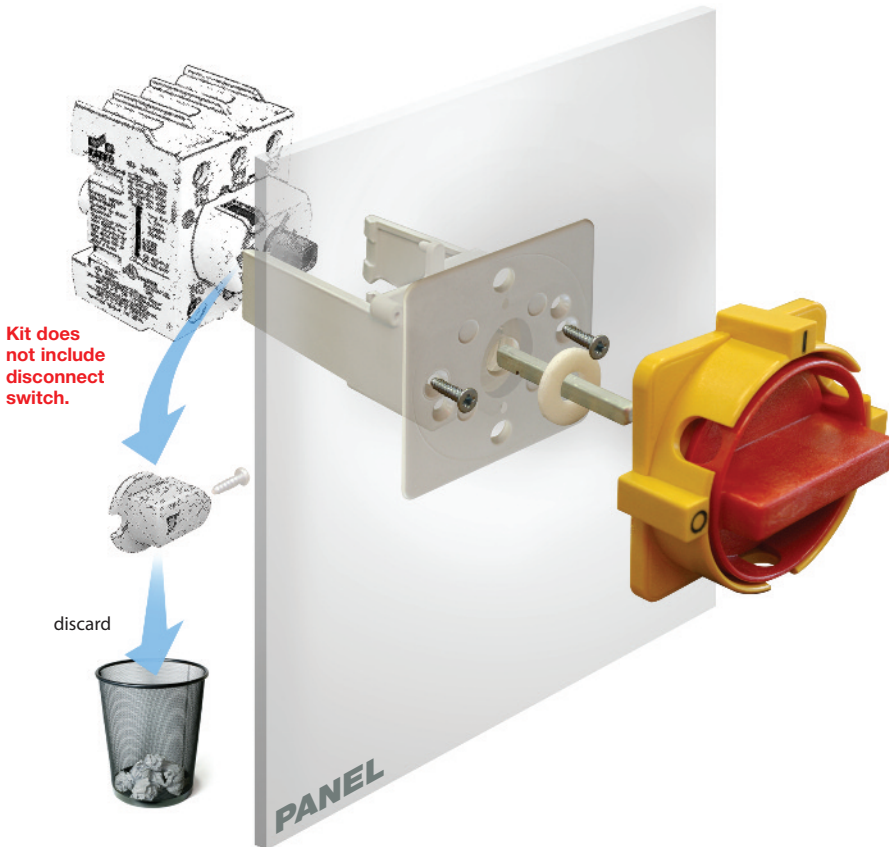


Kit does not include disconnect switch.

discard


1. Drill required holes in the door/side of panel.



2. Fix the base plate and the OKA door mounting kit to the door. Please observe, that washer have been properly placed between door and base plate.

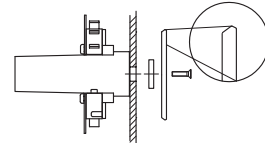


3. Remove position indicator from the switch if applicable. Press the shaft (L=43 mm) into the switch. Connect the wires to the terminals.



4. Turn the switch to off-position (0). Push the switch in place until the snap-on grips are firmly clipped on both sides of the switch.

5. Install the handle on top of the base plate. Please observe, that washer have been properly placed between plate and handle.

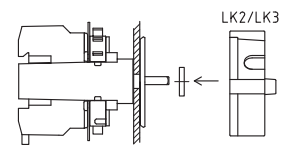

**WARNING:**  
Auxiliary contact may be broken if pushed on switch in on-position (1).

**Dimensions** (to convert to inches multiply by 0.03937)