


Datamate J-Tek Connectors

Female Crimp Kit with Hood

- Supplied as a complete kit: jackscrews assembled to housing; hood, contacts and assembly screws supplied loose.
- Provides strain relief by preventing cable bending at the rear of the connector, and also has the option of inserting a cable tie to reduce pull strain.

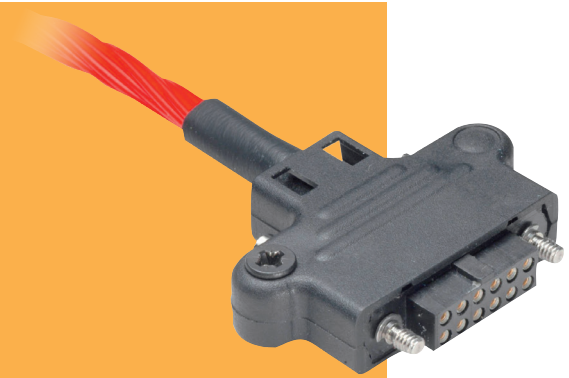

DATAMATE J-TEK

FEMALE		CALCULATION							
	<table border="1"> <tr> <td>A</td> <td>$B + 21.5$</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>$B + 7$</td> </tr> </table>		A	$B + 21.5$	B	Total no. of contacts - 2	C	$B + 7$	
	A	$B + 21.5$							
	B	Total no. of contacts - 2							
C	$B + 7$								
TOOLS		WIRE STRIPPING DETAILS							
<p>Recommended Crimp Tool - M22520/2-01 Positioner - T5747 Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> ➤ Spare and pre-cabled contacts shown on following pages. ➤ Instruction sheets available at www.harwin.com/instructions. 									
HOW TO ORDER									
<p>SERIES CODE</p> <p>M80 - 94 X XX XX</p>		<p>FINISH</p> <table border="1"> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </table>		05	Gold	42	Gold + Tin		
05	Gold								
42	Gold + Tin								
<p>TYPE</p> <table border="1"> <tr> <td>0</td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td>1</td> <td>Large Bore (22 AWG)</td> </tr> </table>		0	Small Bore (24-28 AWG)	1	Large Bore (22 AWG)	<p>TOTAL NO. OF CONTACTS</p> <p>06, 08, 10, 12, 14, 20, 26, 34, 42, 50</p>			
0	Small Bore (24-28 AWG)								
1	Large Bore (22 AWG)								

All dimensions in mm.