

Pulling Grips

Fiber Optic Cable Grips


Galvanized Steel for Outside Plant Cable



IMPORTANT!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-54 through T-57.

F-O Pulling Grip, Flexible Eye, Low Profile, Double/Single Weave Mesh

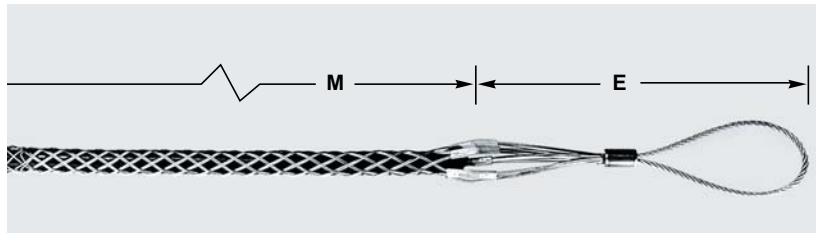


F-O Pulling Grip, Flexible Eye, Low Profile,

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	Catalog Numbers
.10"-.22 (.25-.56)	900 (4,003)	7.5" (19)	10" (25)	033291193
.21"-.35" (.53-.89)	1,400 (6,227)	7.5" (19)	14" (36)	033291194
.32"-.48" (.81-1.22)	2,000 (8,896)	8.5" (22)	19" (48)	033291195
.42"-.61" (1.07-1.55)	2,500 (11,120)	8.5" (22)	21" (53)	033291196
.53"-.74" (1.35-1.88)	3,000 (13,344)	8.5" (22)	23" (58)	033291197
.64"-.87" (1.63-2.21)	4,200 (18,682)	8.5" (22)	25" (64)	033291198
.75"-.1.00" (1.90-2.54)	4,200 (18,682)	8.5" (22)	28" (71)	033291199

E-Eye length

M-Mesh length at nominal diameter

F-O Pulling Grip, Single Weave Mesh

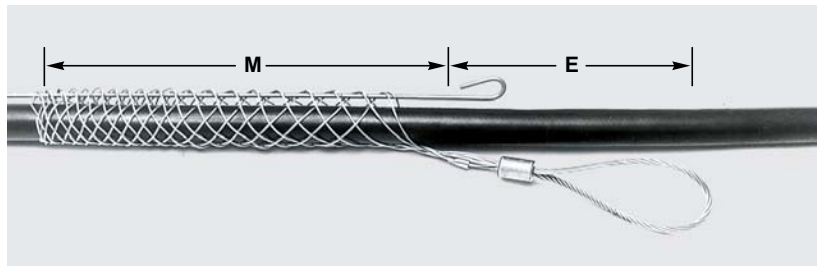

F-O Slack Pulling Grip, Split Mesh Rod Closing, Single Weave

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Approx. Inches (cm)	M Approx. Inches (cm)	Catalog Numbers
.25"-.37" (.63-.94)	300 (1,334)	3" (7.6)	4.7" (12)	033291015
.38"-.49" (.97-1.24)	800 (3,558)	3" (7.6)	5" (13)	033291016
.50"-.61" (1.27-1.55)	800 (3,558)	3" (7.6)	7.5" (19)	033291017
.62"-.74" (1.57-1.88)	1,200 (5,338)	3" (7.6)	8" (20)	033291018

E-Eye length

M-Mesh length at nominal diameter