

Base unit - NLC-055-024D-08I-04QRD-05A - 2700464

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



24 V DC Nanoline base unit. Equipped with 8 digital inputs, 2 analog (0-10 V) inputs and 4 relay output channels. Additional I/O channels can be added using a maximum of three I/O extension modules. Optional communication modules provide network or serial connectivity. Optional Operator Panel provides user interface. Programming is via nanoNavigator.

Why buy this product

- An operator panel can be integrated in the basic unit or installed remotely on a panel as an option
- Intuitive programming language with options for flowcharts and ladder diagrams
- Basic unit has integrated digital inputs, relay outputs, and analog inputs, including high-speed counters

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 576611

Technical data

Dimensions

Width	80.5 mm
Height	103.5 mm
Depth	60 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	90 %

Interfaces

Interface	Operator Panel
Connection method	RJ45/COMBICON
Interface	RS-232
Connection method	Slot 1
Interface	USB
Connection method	Slot 1

Supply

Base unit - NLC-055-024D-08I-04QRD-05A - 2700464

Technical data

Supply

Power supply connection	Screw connection
Supply voltage	24 V DC (Power available to the I/O and Communications modules)
Supply voltage range	19.2 V DC ... 30 V DC
Max. current consumption	250 mA
Typical current consumption	150 mA

Software interfaces

Programming tool	nanoNavigator 3 or above
------------------	--------------------------

Digital inputs

Input name	Digital inputs
Description of the input	EN 61131-2 type 1 NPN/PNP
Connection method	Screw connection
Number of inputs	8
Typical response time	20 ms (on) 70 µs (off)
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	15 V DC ... 30 V DC
Nominal input current at U_{IN}	5 mA DC (On)

Digital outputs

Output name	Relay output
Output description	Relay output
Connection method	Screw connection
Number of outputs	4
Protective circuit	External protection required
Nominal output voltage	24 V DC
Maximum output current per channel	5 A
Maximum output current per module / terminal block	20 A
Maximum output current per module	5 A
Nominal load, ohmic	600 W (@ 24 ohms)

Analog inputs

Description of the input	Analog input
Number of inputs	2
Connection method	Screw connection
Resolution A/D	12 bit (monotonic)
Limit frequency (3 dB)	1 Hz (3 dB)
Type of protection	Transient voltage suppression
Measuring principle	Successive approximation
Voltage input signal	0 V DC ... 10 V DC
Input resistance of voltage input	20 kΩ
Input filter	Digital

Base unit - NLC-055-024D-08I-04QRD-05A - 2700464

Technical data

Counter inputs

Number of inputs	2
Input frequency	6 kHz

General

Mounting type	DIN rail mounting
---------------	-------------------

Classifications

eCl@ss

eCl@ss 4.0	27250315
eCl@ss 4.1	27250315
eCl@ss 5.0	27242216
eCl@ss 5.1	27242216
eCl@ss 6.0	27242216
eCl@ss 7.0	27242216
eCl@ss 8.0	27242216

ETIM

ETIM 2.0	EC001417
ETIM 3.0	EC001417
ETIM 4.0	EC001417
ETIM 5.0	EC001417

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Approvals

Approvals

Approvals

UL Listed / EAC / EAC

Ex Approvals

Approvals submitted

Base unit - NLC-055-024D-08I-04QRD-05A - 2700464

Approvals

Approval details


UL Listed

EAC


EAC

Drawings

Dimensional drawing

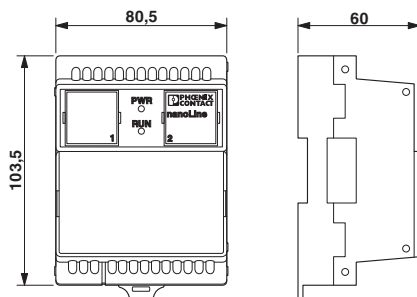

Connection diagram



Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>