

# PDTC143X/123J/143Z/114YQA series

50 V, 100 mA NPN resistor-equipped transistors

Rev. 1 — 30 October 2015

Product data sheet

## 1. Product profile

### 1.1 General description

100 mA NPN Resistor-Equipped Transistor (RET) family in a leadless ultra small DFN1010D-3 (SOT1215) Surface-Mounted Device (SMD) plastic package with visible and solderable side pads.

Table 1. Product overview

| Type number | R1             | R2            | Package NXP             | PNP complement |
|-------------|----------------|---------------|-------------------------|----------------|
| PDTC143XQA  | 4.7 k $\Omega$ | 10 k $\Omega$ | DFN1010D-3<br>(SOT1215) | PDTA143XQA     |
| PDTC123JQA  | 2.2 k $\Omega$ | 47 k $\Omega$ |                         | PDTA123JQA     |
| PDTC143ZQA  | 4.7 k $\Omega$ | 47 k $\Omega$ |                         | PDTA143ZQA     |
| PDTC114YQA  | 10 k $\Omega$  | 47 k $\Omega$ |                         | PDTA114YQA     |

### 1.2 Features and benefits

- 100 mA output current capability
- Built-in bias resistors
- Simplifies circuit design
- Reduces component count
- Reduced pick and place costs
- Low package height of 0.37 mm
- AEC-Q101 qualified
- Suitable for Automatic Optical Inspection (AOI) of solder joint

### 1.3 Applications

- Digital applications
- Cost saving alternative for BC847/BC857 series in digital applications
- Controlling IC inputs
- Switching loads

### 1.4 Quick reference data



Table 2. Quick reference data

| Symbol           | Parameter                 | Conditions | Min | Typ | Max | Unit |
|------------------|---------------------------|------------|-----|-----|-----|------|
| V <sub>CEO</sub> | collector-emitter voltage | open base  | -   | -   | 50  | V    |
| I <sub>O</sub>   | output current            |            | -   | -   | 100 | mA   |



## 2. Pinning information

Table 3. Pinning

| Pin | Symbol | Description        | Simplified outline   | Graphic symbol  |
|-----|--------|--------------------|--|---|
| 1   | I      | input (base)       |  <p>Transparent top view</p> |  <p>aaa-019964</p> |
| 2   | GND    | GND (emitter)      |  |   |
| 3   | O      | output (collector) |  |   |
| 4   | O      | output (collector) |  |   |

## 3. Ordering information

Table 4. Ordering information


| Type number | Package    |   |         |
|-------------|------------|---|---------|
|             | Name       | Description   | Version |
| PDTC143XQA  | DFN1010D-3 | plastic thermal enhanced ultra thin small outline package; no leads; 3 terminals; body: 1.1 × 1.0 × 0.37 mm | SOT1215 |
| PDTC123JQA  |            |   |         |
| PDTC143ZQA  |            |   |         |
| PDTC114YQA  |            |   |         |

## 4. Marking

**Table 5. Marking codes**

| Type number | Marking code |
|-------------|--------------|
| PDTC143XQA  | 11 11 01     |
| PDTC123JQA  | 10 11 11     |
| PDTC143ZQA  | 11 00 11     |
| PDTC114YQA  | 11 10 01     |

### 4.1 Binary marking code description

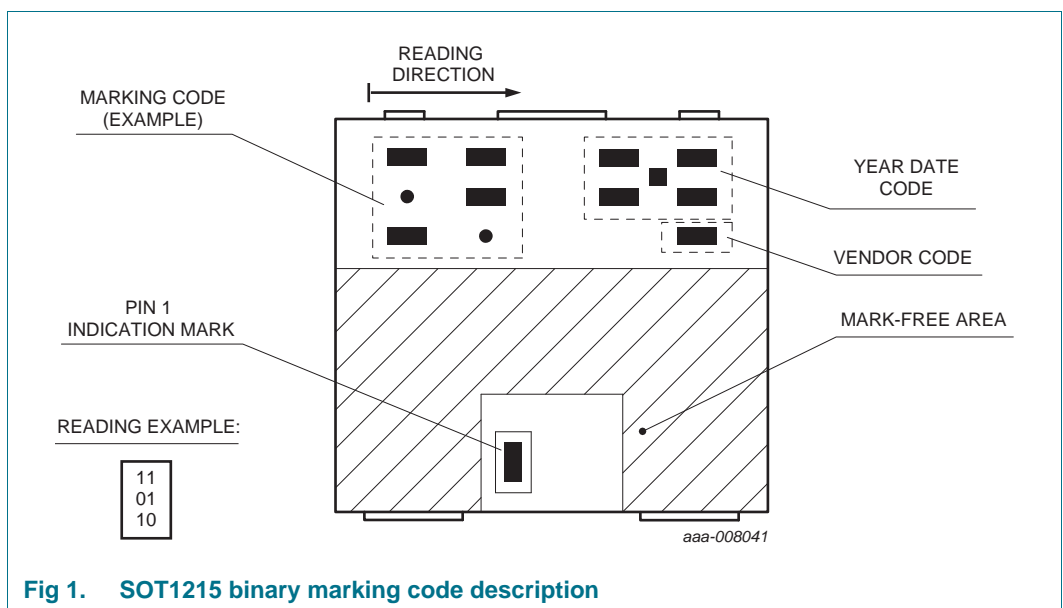

**Fig 1. SOT1215 binary marking code description**

## 5. Limiting values

**Table 6. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134).*


| Symbol    | Parameter                 | Conditions   | Min | Max | Unit |
|-----------|---------------------------|--------------|-----|-----|------|
| $V_{CBO}$ | collector-base voltage    | open emitter | -   | 50  | V    |
| $V_{CEO}$ | collector-emitter voltage | open base    | -   | 50  | V    |
| $V_{EBO}$ | emitter-base voltage      |              |     |     |      |
|           | PDTC143XQA                |              | -   | 7   | V    |
|           | PDTC123JQA                |              | -   | 5   | V    |
|           | PDTC143ZQA                |              | -   | 5   | V    |
|           | PDTC114YQA                |              | -   | 6   | V    |

**Table 6. Limiting values ...continued**  
*In accordance with the Absolute Maximum Rating System (IEC 60134).*

| Symbol           | Parameter               | Conditions               | Min | Max  | Unit |    |
|------------------|-------------------------|--------------------------|-----|------|------|----|
| V <sub>I</sub>   | input voltage           |                          |     |      |      |    |
|                  | PDTC143XQA              |                          | -7  | +30  | V    |    |
|                  | PDTC123JQA              |                          | -5  | +12  | V    |    |
|                  | PDTC143ZQA              |                          | -5  | +30  | V    |    |
|                  | PDTC114YQA              |                          | -6  | +40  | V    |    |
| I <sub>O</sub>   | output current          |                          | -   | 100  | mA   |    |
| P <sub>tot</sub> | total power dissipation | T <sub>amb</sub> ≤ 25 °C | [1] | -    | 280  | mW |
|                  |                         |                          | [2] | -    | 440  | mW |
| T <sub>j</sub>   | junction temperature    |                          | -   | 150  | °C   |    |
| T <sub>amb</sub> | ambient temperature     |                          | -55 | +150 | °C   |    |
| T <sub>stg</sub> | storage temperature     |                          | -65 | +150 | °C   |    |

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and standard footprint.

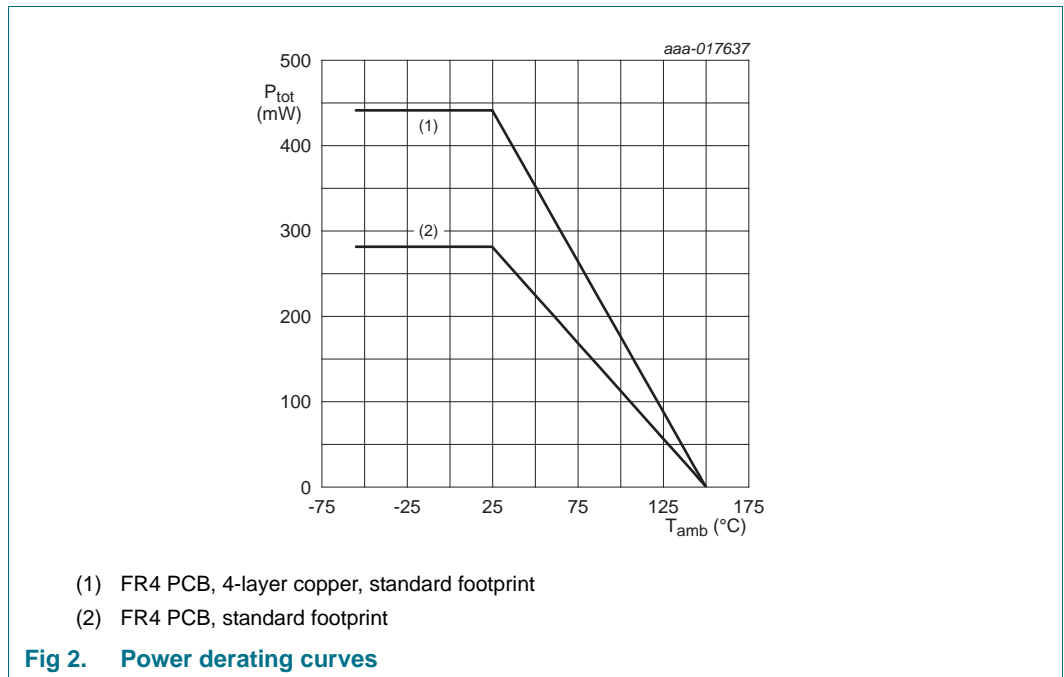

## 6. Thermal characteristics

Table 7. Thermal characteristics

| Symbol        | Parameter                                   | Conditions  | Min | Typ | Max | Unit |     |
|---------------|---|-------------|-----|-----|-----|------|-----|
| $R_{th(j-a)}$ | thermal resistance from junction to ambient | in free air | [1] | -   | -   | 446  | K/W |
|               |   |             | [2] | -   | -   | 284  | K/W |

- [1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
- [2] Device mounted on an FR4 PCB, 4-layer copper, tin-plated and standard footprint.

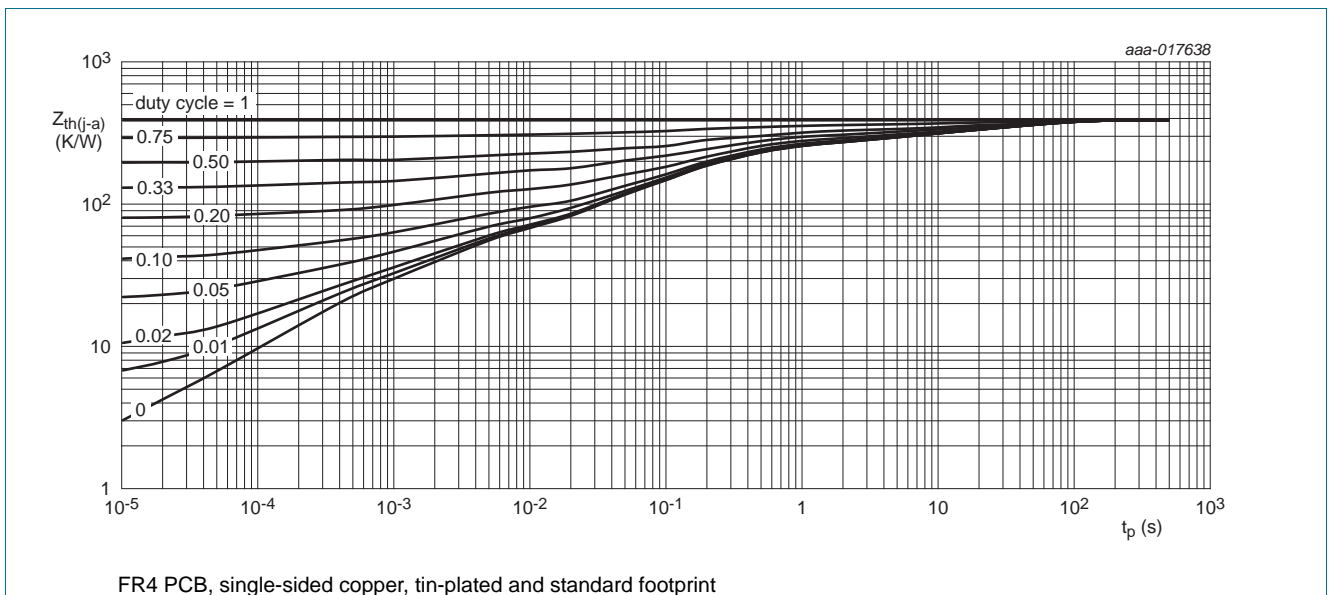


Fig 3. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

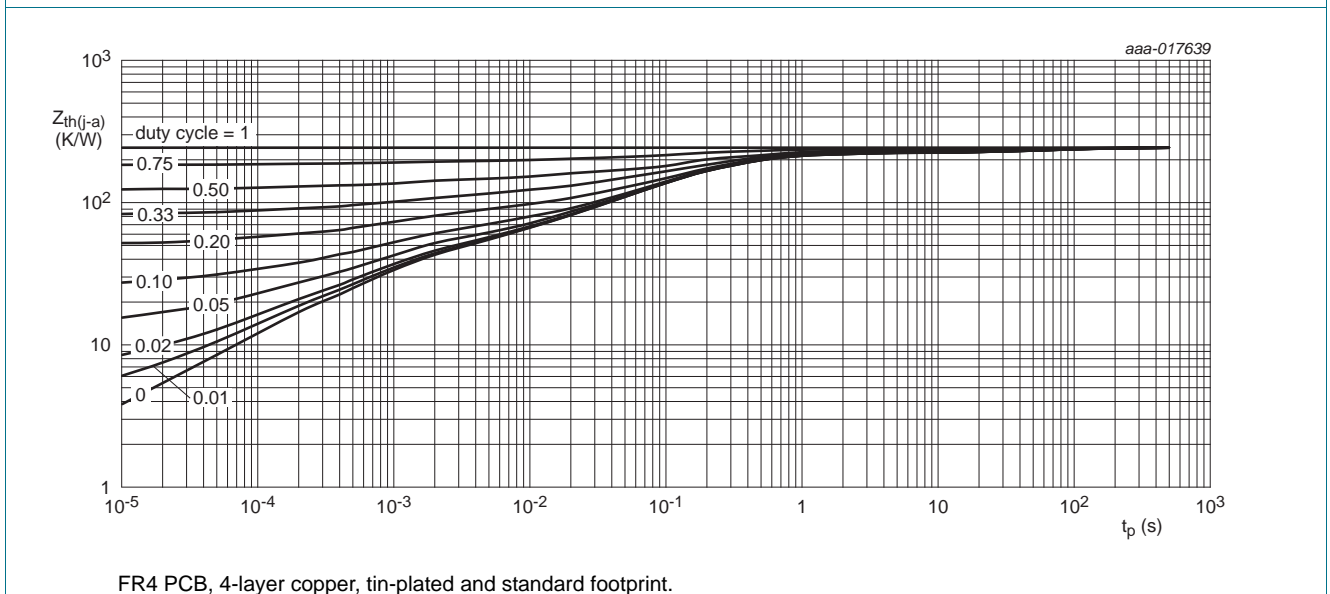


Fig 4. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

## 7. Characteristics

**Table 8. Characteristics**
*T<sub>amb</sub> = 25 °C unless otherwise specified.*


| Symbol              | Parameter                                   | Conditions  | Min  | Typ  | Max  | Unit |
|---------------------|---|---|------|------|------|------|
| I <sub>CBO</sub>    | collector-base cut-off current              | V <sub>CB</sub> = 50 V; I <sub>E</sub> = 0 A                          | -    | -    | 100  | nA   |
| I <sub>CEO</sub>    | collector-emitter cut-off current           | V <sub>CE</sub> = 30 V; I <sub>B</sub> = 0 A                          | -    | -    | 1    | μA   |
|                     |   | V <sub>CE</sub> = 30 V; I <sub>B</sub> = 0 A; T <sub>j</sub> = 150 °C | -    | -    | 5    | μA   |
| I <sub>EBO</sub>    | emitter-base cut-off current                |   |      |      |      |      |
|                     | PDTC143XQA                                  | V <sub>EB</sub> = 5 V; I <sub>C</sub> = 0 A                           | -    | -    | 600  | μA   |
|                     | PDTC123JQA                                  |   | -    | -    | 180  | μA   |
|                     | PDTC143ZQA                                  |   | -    | -    | 170  | μA   |
|                     | PDTC114YQA                                  |   | -    | -    | 150  | μA   |
| h <sub>FE</sub>     | DC current gain                             |   |      |      |      |      |
|                     | PDTC143XQA                                  | V <sub>CE</sub> = 5 V; I <sub>C</sub> = 10 mA                         | 50   | -    | -    |      |
|                     | PDTC123JQA                                  | V <sub>CE</sub> = 5 V; I <sub>C</sub> = 10 mA                         | 100  | -    | -    |      |
|                     | PDTC143ZQA                                  | V <sub>CE</sub> = 5 V; I <sub>C</sub> = 10 mA                         | 100  | -    | -    |      |
|                     | PDTC114YQA                                  | V <sub>CE</sub> = 5 V; I <sub>C</sub> = 5 mA                          | 100  | -    | -    |      |
| V <sub>CEsat</sub>  | collector-emitter saturation voltage        |   |      |      |      |      |
|                     | PDTC143XQA                                  | I <sub>C</sub> = 10 mA; I <sub>B</sub> = 0.5 mA                       | -    | -    | 100  | mV   |
|                     | PDTC123JQA                                  | I <sub>C</sub> = 5 mA; I <sub>B</sub> = 0.25 mA                       | -    | -    | 100  | mV   |
|                     | PDTC143ZQA                                  | I <sub>C</sub> = 5 mA; I <sub>B</sub> = 0.25 mA                       | -    | -    | 100  | mV   |
|                     | PDTC114YQA                                  | I <sub>C</sub> = 5 mA; I <sub>B</sub> = 0.25 mA                       | -    | -    | 100  | mV   |
| V <sub>I(off)</sub> | off-state input voltage                     |   |      |      |      |      |
|                     | PDTC143XQA                                  | V <sub>CE</sub> = 5 V; I <sub>C</sub> = 100 μA                        | -    | 0.8  | 0.3  | V    |
|                     | PDTC123JQA                                  |   | -    | 0.6  | 0.5  | V    |
|                     | PDTC143ZQA                                  |   | -    | 0.6  | 0.5  | V    |
|                     | PDTC114YQA                                  |   | -    | 0.7  | 0.5  | V    |
| V <sub>I(on)</sub>  | on-state input voltage                      |   |      |      |      |      |
|                     | PDTC143XQA                                  | V <sub>CE</sub> = 0.3 V; I <sub>C</sub> = 20 mA                       | 2.5  | 1.5  | -    | V    |
|                     | PDTC123JQA                                  | V <sub>CE</sub> = 0.3 V; I <sub>C</sub> = 5 mA                        | 1.1  | 0.75 | -    | V    |
|                     | PDTC143ZQA                                  | V <sub>CE</sub> = 0.3 V; I <sub>C</sub> = 5 mA                        | 1.3  | 0.9  | -    | V    |
|                     | PDTC114YQA                                  | V <sub>CE</sub> = 0.3 V; I <sub>C</sub> = 1 mA                        | 1.4  | 0.8  | -    | V    |
| R1                  | bias resistor 1 (input) <a href="#">[1]</a> |   |      |      |      |      |
|                     | PDTC143XQA                                  |   | 3.3  | 4.7  | 6.1  | kΩ   |
|                     | PDTC123JQA                                  |   | 1.54 | 2.2  | 2.86 | kΩ   |
|                     | PDTC143ZQA                                  |   | 3.3  | 4.7  | 6.1  | kΩ   |
|                     | PDTC114YQA                                  |   | 7    | 10   | 13   | kΩ   |

**Table 8. Characteristics ...continued**  
 $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

| Symbol | Parameter             | Conditions   | Min | Typ | Max | Unit |
|--------|-----------------------|--|-----|-----|-----|------|
| R2/R1  | bias resistor ratio   |  | [1] |     |     |      |
|        | PDTC143XQA            |  | 1.7 | 2.1 | 2.6 |      |
|        | PDTC123JQA            |  | 17  | 21  | 26  |      |
|        | PDTC143ZQA            |  | 8   | 10  | 12  |      |
|        | PDTC114YQA            |  | 3.7 | 4.7 | 5.7 |      |
| $C_c$  | collector capacitance | $V_{CB} = 10\text{ V}$ ; $I_E = i_e = 0\text{ A}$ ; $f = 1\text{ MHz}$ | -   | -   | 2.5 | pF   |
| $f_T$  | transition frequency  | $V_{CE} = 5\text{ V}$ ; $I_C = 10\text{ mA}$ ; $f = 100\text{ MHz}$    | [2] | 230 | -   | MHz  |


[1] See [Section 8 "Test information"](#) for resistor calculation and test conditions.

[2] Characteristics of built-in transistor.

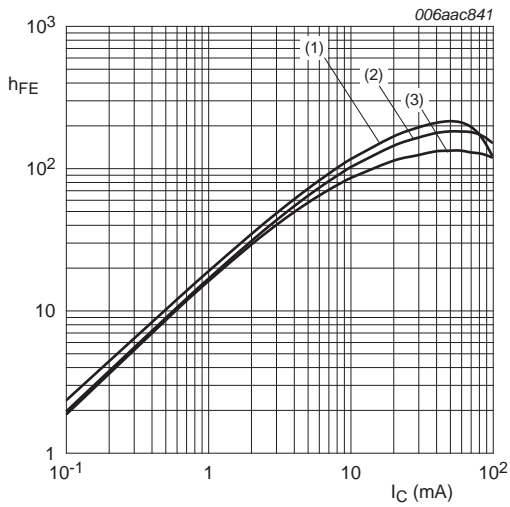


$V_{CE} = 5\text{ V}$   
 (1)  $T_{amb} = 100\text{ }^{\circ}\text{C}$   
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$   
 (3)  $T_{amb} = -40\text{ }^{\circ}\text{C}$

**Fig 5. PDTC143XQA: DC current gain as a function of collector current; typical values**

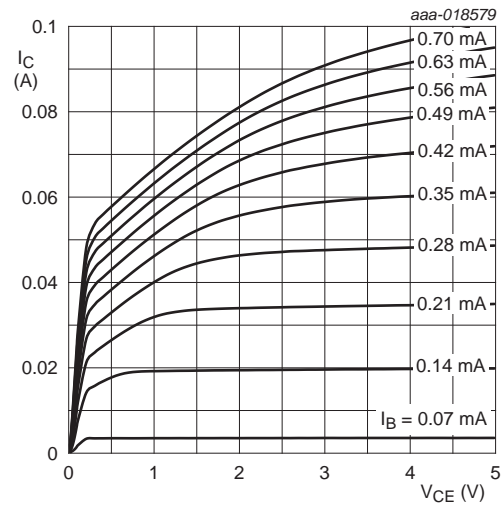


$T_{amb} = 25\text{ }^{\circ}\text{C}$

**Fig 6. PDTC143XQA: Collector current as a function of collector-emitter voltage; typical values**

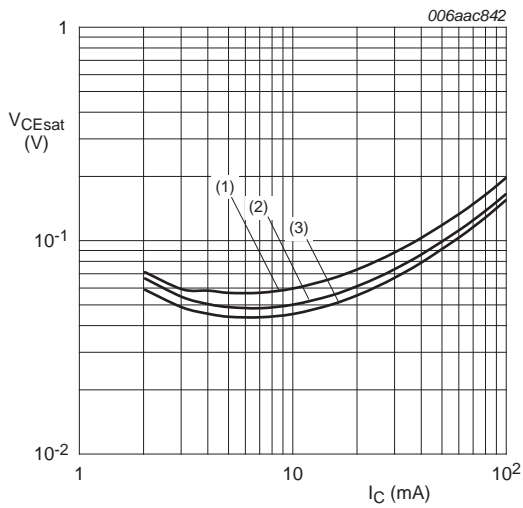

$I_C/I_B = 20$   
 (1)  $T_{amb} = 100\text{ }^{\circ}\text{C}$   
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$   
 (3)  $T_{amb} = -40\text{ }^{\circ}\text{C}$


**Fig 7. PDTC143XQA: Collector-emitter saturation voltage as a function of collector current; typical values**

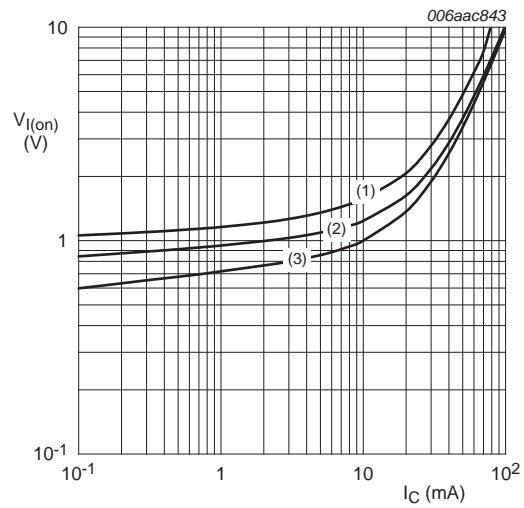

$V_{CE} = 0.3\text{ V}$   
 (1)  $T_{amb} = -40\text{ }^{\circ}\text{C}$   
 (2)  $T_{amb} = 25\text{ }^{\circ}\text{C}$   
 (3)  $T_{amb} = 100\text{ }^{\circ}\text{C}$


**Fig 8. PDTC143XQA: On-state input voltage as a function of collector current; typical values**



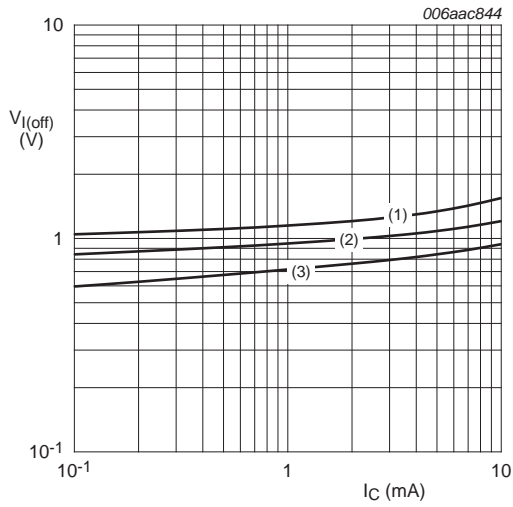


- $V_{CE} = 5\text{ V}$
- (1)  $T_{amb} = -40\text{ }^\circ\text{C}$
  - (2)  $T_{amb} = 25\text{ }^\circ\text{C}$
  - (3)  $T_{amb} = 100\text{ }^\circ\text{C}$

**Fig 9. PDTC143XQA: Off-state input voltage as a function of collector current; typical values**

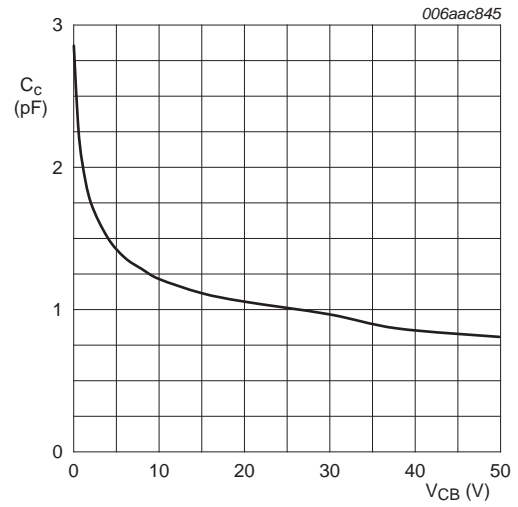


$f = 1\text{ MHz}; T_{amb} = 25\text{ }^\circ\text{C}$

**Fig 10. PDTC143XQA: Collector capacitance as a function of collector-base voltage; typical values**

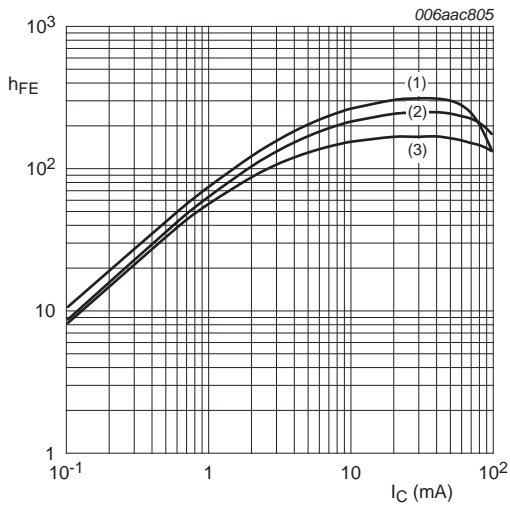


$V_{CE} = 5 \text{ V}$   
 (1)  $T_{amb} = 100 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = -40 \text{ }^\circ\text{C}$

**Fig 11. PDTC123JQA: DC current gain as a function of collector current; typical values**

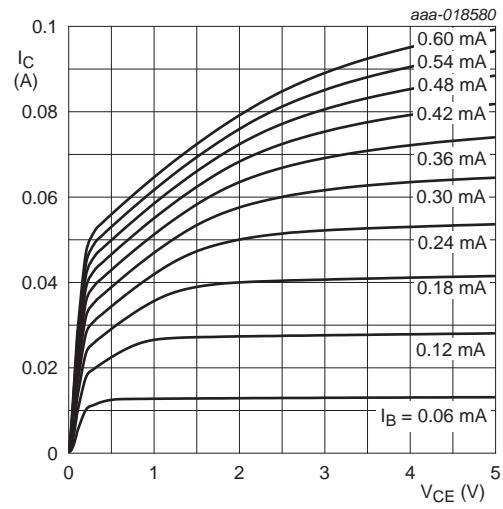


$T_{amb} = 25 \text{ }^\circ\text{C}$

**Fig 12. PDTC123JQA: Collector current as a function of collector-emitter voltage; typical values**

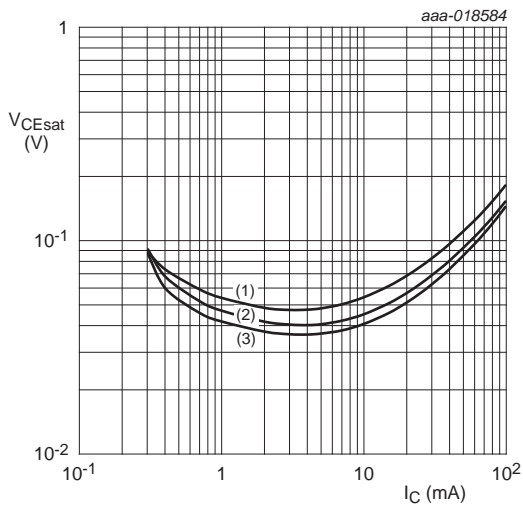


$I_C/I_B = 20$   
 (1)  $T_{amb} = 100 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = -40 \text{ }^\circ\text{C}$

**Fig 13. PDTC123JQA: Collector-emitter saturation voltage as a function of collector current; typical values**

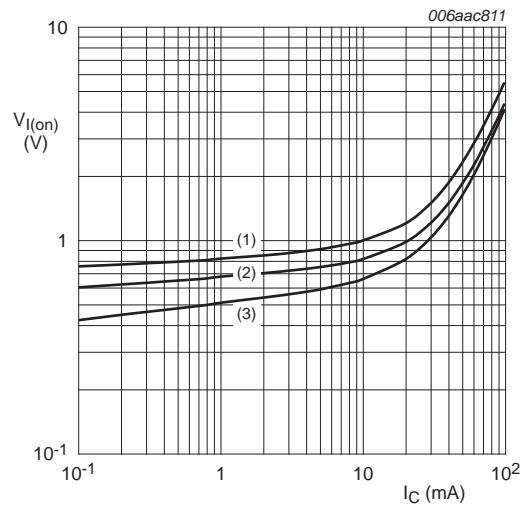


$V_{CE} = 0.3 \text{ V}$   
 (1)  $T_{amb} = -40 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = 100 \text{ }^\circ\text{C}$

**Fig 14. PDTC123JQA: On-state input voltage as a function of collector current; typical values**

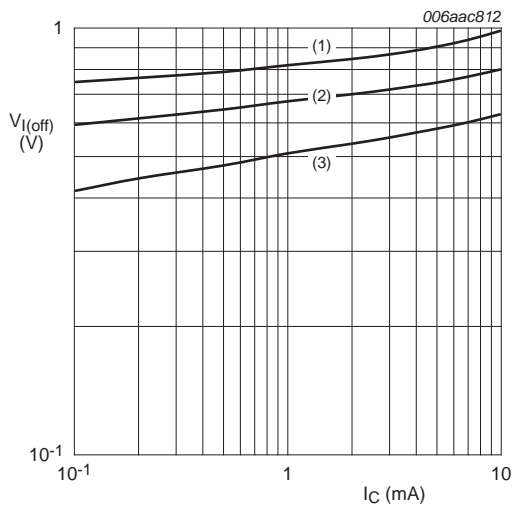


- $V_{CE} = 5\text{ V}$
- (1)  $T_{amb} = -40\text{ °C}$
  - (2)  $T_{amb} = 25\text{ °C}$
  - (3)  $T_{amb} = 100\text{ °C}$

**Fig 15. PDTC123JQA: Off-state input voltage as a function of collector current; typical values**

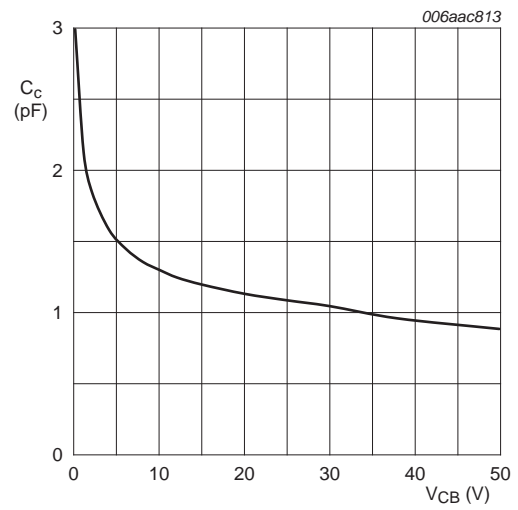


$f = 1\text{ MHz}; T_{amb} = 25\text{ °C}$

**Fig 16. PDTC123JQA: Collector capacitance as a function of collector-base voltage; typical values**

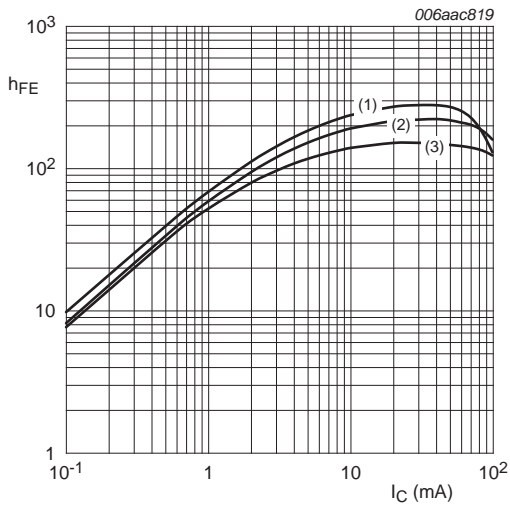


$V_{CE} = 5 \text{ V}$   
 (1)  $T_{amb} = 100 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = -40 \text{ }^\circ\text{C}$

**Fig 17. PDTC143ZQA: DC current gain as a function of collector current; typical values**

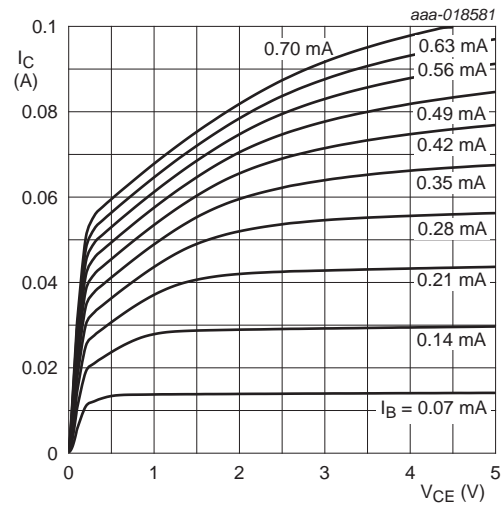


$T_{amb} = 25 \text{ }^\circ\text{C}$

**Fig 18. PDTC143ZQA: Collector current as a function of collector-emitter voltage; typical values**

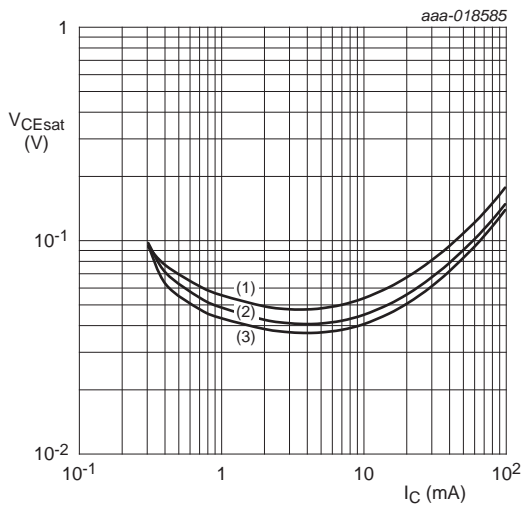


$I_C/I_B = 20$   
 (1)  $T_{amb} = 100 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = -40 \text{ }^\circ\text{C}$

**Fig 19. PDTC143ZQA: Collector-emitter saturation voltage as a function of collector current; typical values**

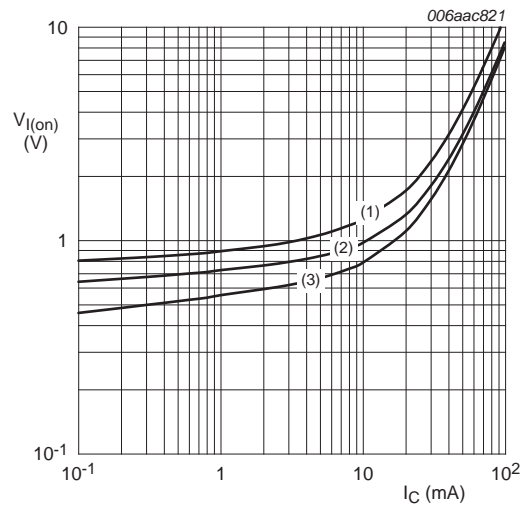


$V_{CE} = 0.3 \text{ V}$   
 (1)  $T_{amb} = -40 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = 100 \text{ }^\circ\text{C}$

**Fig 20. PDTC143ZQA: On-state input voltage as a function of collector current; typical values**

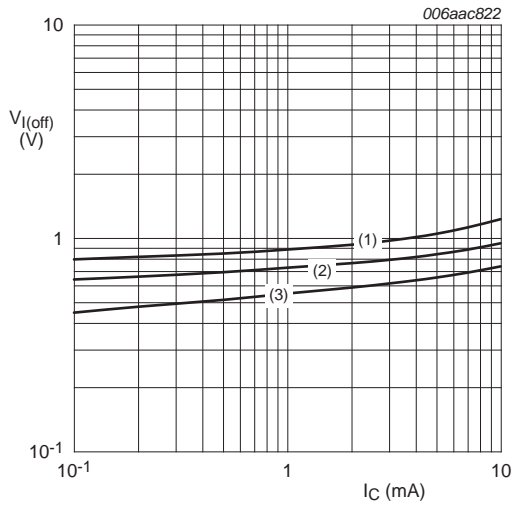


- $V_{CE} = 5\text{ V}$
- (1)  $T_{amb} = -40\text{ }^\circ\text{C}$
  - (2)  $T_{amb} = 25\text{ }^\circ\text{C}$
  - (3)  $T_{amb} = 100\text{ }^\circ\text{C}$

**Fig 21. PDTC143ZQA: Off-state input voltage as a function of collector current; typical values**

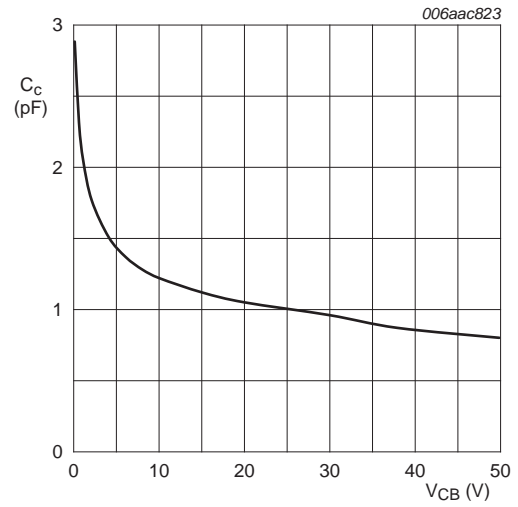


$f = 1\text{ MHz}$ ;  $T_{amb} = 25\text{ }^\circ\text{C}$

**Fig 22. PDTC143ZQA: Collector capacitance as a function of collector-base voltage; typical values**

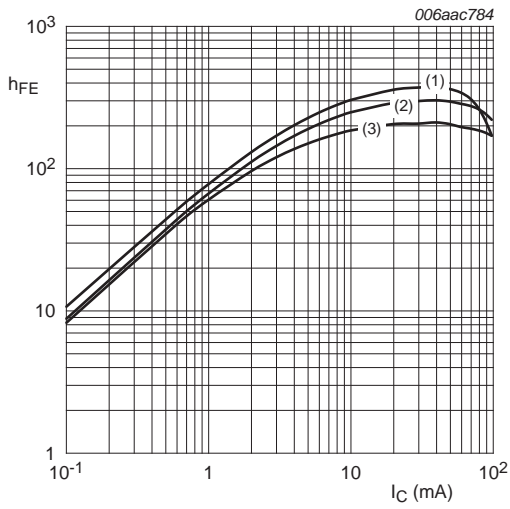


$V_{CE} = 5 \text{ V}$   
 (1)  $T_{amb} = 100 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = -40 \text{ }^\circ\text{C}$

**Fig 23. PDTC114YQA: DC current gain as a function of collector current; typical values**

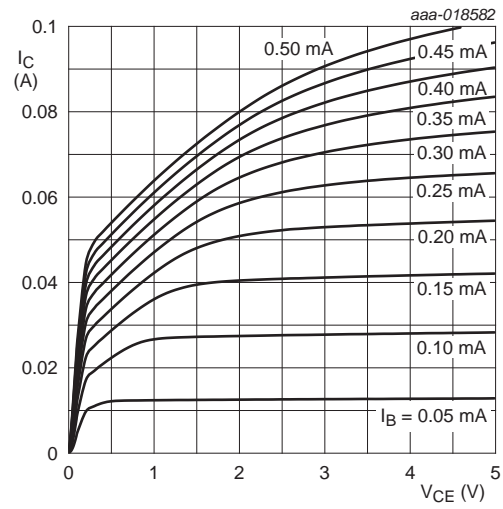


$T_{amb} = 25 \text{ }^\circ\text{C}$

**Fig 24. PDTC114YQA: Collector current as a function of collector-emitter voltage; typical values**

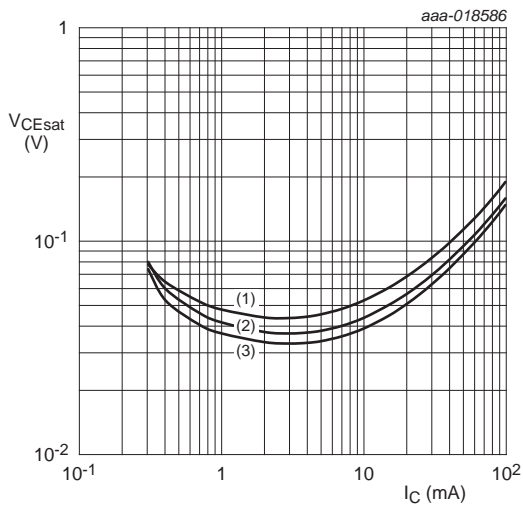


$I_C/I_B = 20$   
 (1)  $T_{amb} = 100 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = -40 \text{ }^\circ\text{C}$

**Fig 25. PDTC114YQA: Collector-emitter saturation voltage as a function of collector current; typical values**

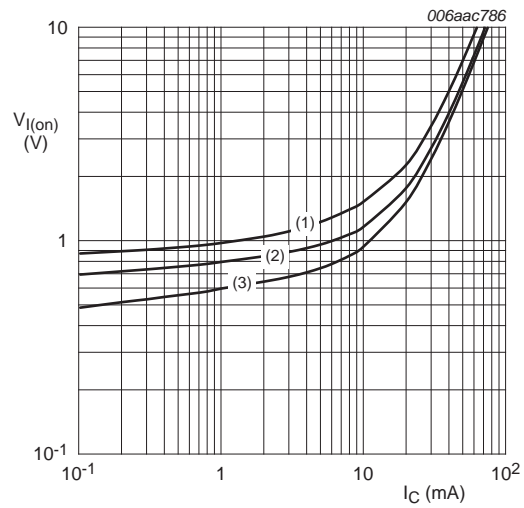


$V_{CE} = 0.3 \text{ V}$   
 (1)  $T_{amb} = -40 \text{ }^\circ\text{C}$   
 (2)  $T_{amb} = 25 \text{ }^\circ\text{C}$   
 (3)  $T_{amb} = 100 \text{ }^\circ\text{C}$

**Fig 26. PDTC114YQA: On-state input voltage as a function of collector current; typical values**

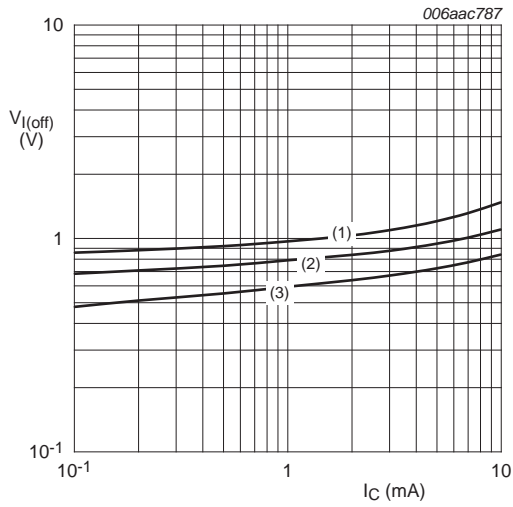


- $V_{CE} = 5\text{ V}$
- (1)  $T_{amb} = -40^\circ\text{C}$
  - (2)  $T_{amb} = 25^\circ\text{C}$
  - (3)  $T_{amb} = 100^\circ\text{C}$

**Fig 27. PDTC114YQA: Off-state input voltage as a function of collector current; typical values**

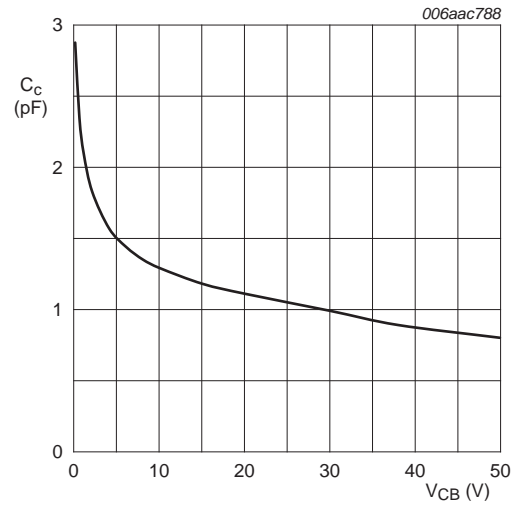

$f = 1\text{ MHz}; T_{amb} = 25^\circ\text{C}$

**Fig 28. PDTC114YQA: Collector capacitance as a function of collector-base voltage; typical values**

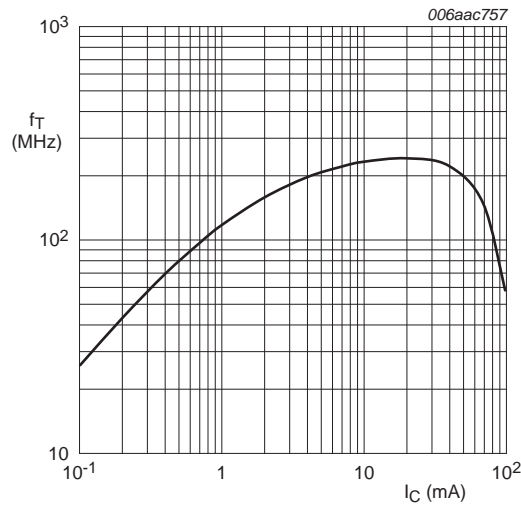

$V_{CE} = 5\text{ V}; T_{amb} = 25^\circ\text{C}$

**Fig 29. Transition frequency as a function of collector current; typical values of built-in transistor**

## 8. Test information

### 8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.


### 8.2 Resistor calculation

- Calculation of bias resistor 1 (R1):

$$R1 = \frac{V(I_{I2}) - V(I_{I1})}{I_{I2} - I_{I1}}$$

- Calculation of bias resistor ratio (R2/R1):

$$\frac{R2}{R1} = \frac{V(I_{I4}) - V(I_{I3})}{R1 \cdot (I_{I4} - I_{I3})} - 1$$

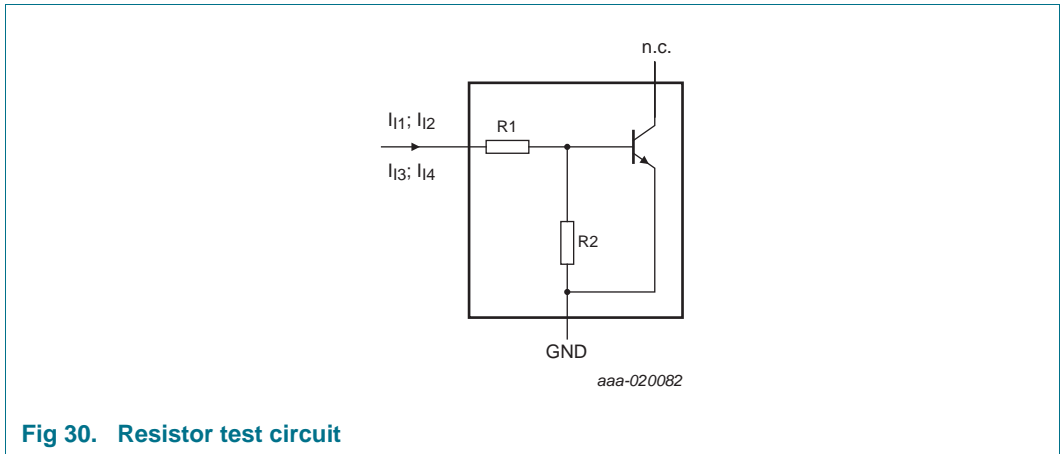

**Fig 30. Resistor test circuit**


### 8.3 Resistor test conditions

**Table 9. Resistor test conditions**

| Type number | R1 (kΩ) | R2 (kΩ) | Test conditions |                 |                 |                 |
|-------------|---------|---------|-----------------|-----------------|-----------------|-----------------|
|             |         |         | I <sub>I1</sub> | I <sub>I2</sub> | I <sub>I3</sub> | I <sub>I4</sub> |
| PDTC143XQA  | 4.7     | 10      | 350 μA          | 450 μA          | -350 μA         | -450 μA         |
| PDTC123JQA  | 2.2     | 47      | 90 μA           | 140 μA          | -55 μA          | -105 μA         |
| PDTC143ZQA  | 4.7     | 47      | 90 μA           | 140 μA          | -55 μA          | -105 μA         |
| PDTC114YQA  | 10      | 47      | 90 μA           | 140 μA          | -55 μA          | -105 μA         |




**9. Package outline**

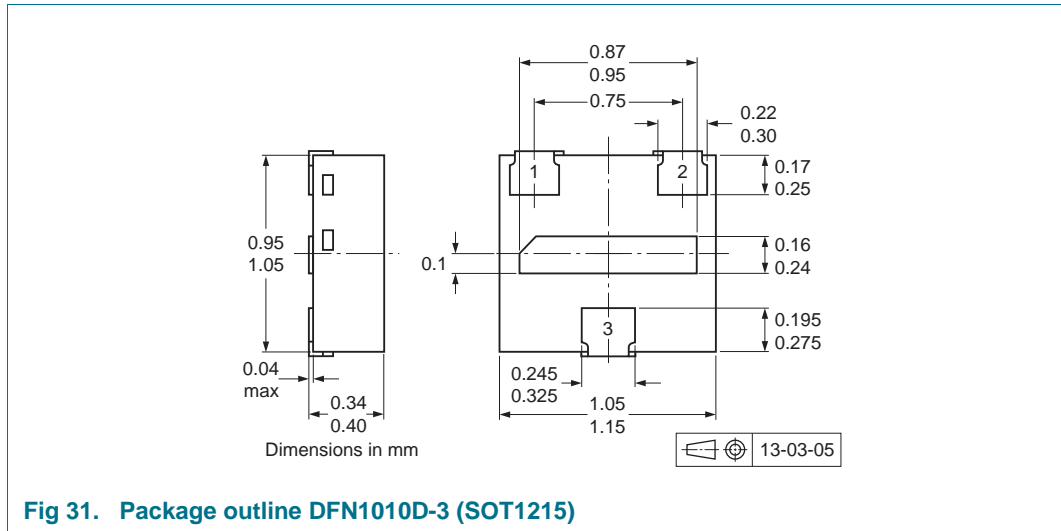

**Fig 31. Package outline DFN1010D-3 (SOT1215)**

## 10. Soldering

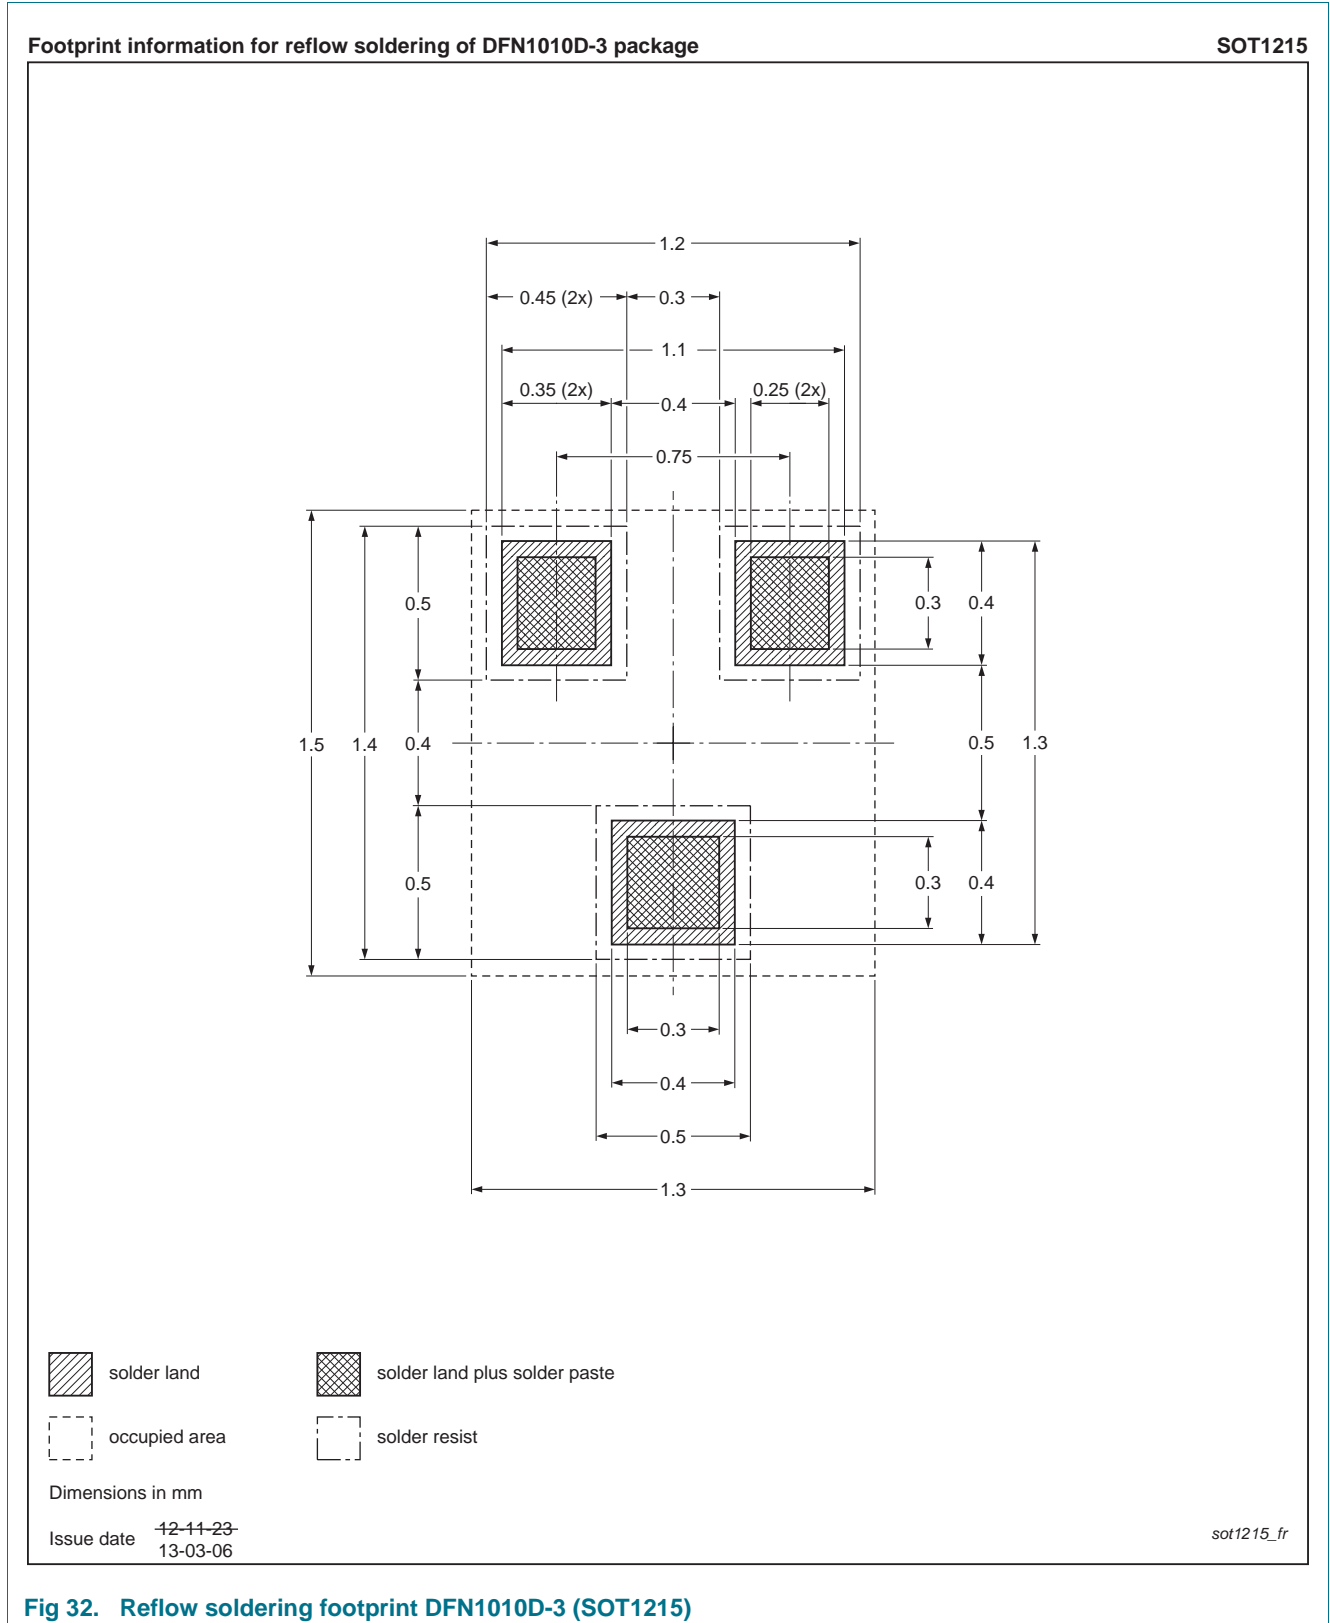

**Fig 32. Reflow soldering footprint DFN1010D-3 (SOT1215)**

## 11. Revision history

---

**Table 10. Revision history**

| Document ID                       | Release date | Data sheet status  | Change notice | Supersedes |
|-----------------------------------|--------------|--------------------|---------------|------------|
| PDTC143X_123J_143Z_114YQA_SER v.1 | 20151030     | Product data sheet | -             | -          |

## 12. Legal information

### 12.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 12.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 12.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 13. Contact information

---

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 14. Contents

|           |   |           |
|-----------|---|-----------|
| <b>1</b>  | <b>Product profile</b> . . . . .          | <b>1</b>  |
| 1.1       | General description . . . . .             | 1         |
| 1.2       | Features and benefits . . . . .           | 1         |
| 1.3       | Applications . . . . .                    | 1         |
| 1.4       | Quick reference data . . . . .            | 1         |
| <b>2</b>  | <b>Pinning information</b> . . . . .      | <b>2</b>  |
| <b>3</b>  | <b>Ordering information</b> . . . . .     | <b>2</b>  |
| <b>4</b>  | <b>Marking</b> . . . . .                  | <b>3</b>  |
| 4.1       | Binary marking code description . . . . . | 3         |
| <b>5</b>  | <b>Limiting values</b> . . . . .          | <b>3</b>  |
| <b>6</b>  | <b>Thermal characteristics</b> . . . . .  | <b>5</b>  |
| <b>7</b>  | <b>Characteristics</b> . . . . .          | <b>6</b>  |
| <b>8</b>  | <b>Test information</b> . . . . .         | <b>16</b> |
| 8.1       | Quality information . . . . .             | 16        |
| 8.2       | Resistor calculation . . . . .            | 16        |
| 8.3       | Resistor test conditions . . . . .        | 16        |
| <b>9</b>  | <b>Package outline</b> . . . . .          | <b>17</b> |
| <b>10</b> | <b>Soldering</b> . . . . .                | <b>18</b> |
| <b>11</b> | <b>Revision history</b> . . . . .         | <b>19</b> |
| <b>12</b> | <b>Legal information</b> . . . . .        | <b>20</b> |
| 12.1      | Data sheet status . . . . .               | 20        |
| 12.2      | Definitions . . . . .                     | 20        |
| 12.3      | Disclaimers . . . . .                     | 20        |
| 12.4      | Trademarks . . . . .                      | 21        |
| <b>13</b> | <b>Contact information</b> . . . . .      | <b>21</b> |
| <b>14</b> | <b>Contents</b> . . . . .                 | <b>22</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP Semiconductors N.V. 2015. All rights reserved.

For more information, please visit: <http://www.nxp.com>  
 For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 30 October 2015  
 Document identifier: PDTC143X\_123J\_143Z\_114YQA\_SER