



Radiall 狐


FEMALE STRAIGHT PLUG CABLE 5/50

PAGE 1/3 ISSUE 16-03-16P SERIES SHV PART NUMBER R317005000

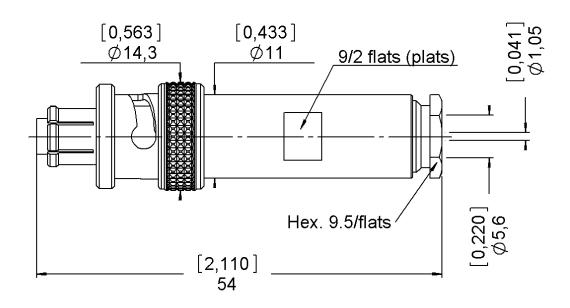





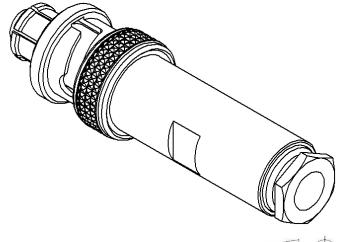

COMPONENTS	MATERIALS	PLATING (μm)
Body	BRASS	NICKEL
Center contact	BERYLLIUM COPPER	GOLD OVER NICKEL
Outer contact	BERYLLIUM COPPER	NICKEL
Insulator	PTFE	
Gasket	SILICONE RUBBER	
Others parts	BRASS	NICKEL
-	-	-
-	-	-



Technical Data Sheet

FEMALE STRAIGHT PLUG CABLE 5/50

PAGE 2/3 ISSUE 16-03-16P SERIES SHV PART NUMBER R317005000

PACKAGING

1	Contact us	Contact us
Standard	Unit	Other

ELECTRICAL CHARACTERISTICS

Impedance 50 Frequency 0-2 GHz **VSWR** 1.2 0,3000 x F(GHz) Maxi Insertion loss NA √F(GHz) dB Maxi RF leakage NA - F(GHz)) dB Maxi - (Voltage rating Veff Maxi Dielectric withstanding voltage 10000* Veff mini Insulation resistance 5000 $M\Omega$ mini

MECHANICAL CHARACTERISTICS

Center contact retention

 Axial force - Mating End
 27
 N mini

 Axial force - Opposite end
 27
 N mini

 Torque
 NA
 N.cm mini

Recommended torque

 Mating
 NA
 N.cm

 Panel nut
 NA
 N.cm

 Clamp nut
 150
 N.cm

 A/F clamp nut
 9,5000
 mm

Mating life 500 Cycles mini

Weight **25,0000** g

ENVIRONMENTAL

Operating temperature -65/+165 °C
Hermetic seal NA Atm.cm3/s
Panel leakage NA

SPECIFICATION

CABLE ASSEMBLY

Stripping	а	b	С	d	е	f
mm	3.5	25	0	0	20.5	0

Assembly instruction:

Recommended cable(s)

RG 142 BU RG 58 KX 15

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off 180 N mini - torque NA N.cm

TOOLING

Part Number	Description	Hexagon	
R282223000	CRIMPING TOOL	HEX 1.73	
R282235011	CRIMPING DIES M22520/5-11	HEX 1.73	
R282293000	CRIMPING TOOL M22520/5-01		

OTHER CHARACTERISTICS

** 6000 V eff (DC) ** 3500 V rms (AC)

* 12000 V - Coupled Connector



FEMALE STRAIGHT PLUG CABLE 5/50





PAGE **3/3**


ISSUE 16-03-16P

SERIES SHV

PART NUMBER R317005000

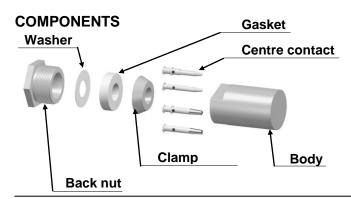






1

Strip the cable as shown in sketch 1.



4


Slide the back nut over the cable assembly.



2

Slide the clamp nut, the washer and the gasket onto the cable.

Slide the clamp braid sleeve over the braid.

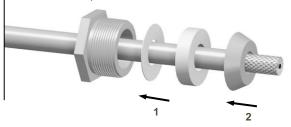

5

Crimp or solder the centre contact onto the inner conductor (see TDS connector).



3

Fold the braid back and trim off the extra braid.

Trim dielectric back as shown in sketch 2.



6

Screw sub-assembly into the connector body with the adapted wrench.

Recommended coupling torque (see connector TDS).

