



Extract from the online catalog

## DFK-MSTB 2,5/16-G-5,08

Order No.: 0707374

The figure shows a 10-position version of the product



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0707374>

Plug component, Nominal current: 12 A, Nom. voltage: 320 V, Nom. voltage: 320 V, Pitch: 5.08 mm, Number of positions: 16, Color: green, Assembly: Direct mounting

Commercial data	
EAN	4017918004149
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.01534 KG
Catalog page information	Page 284 (CC-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

Dimensions / positions	
Pitch	5.08 mm
Dimension a	76.2 mm
Number of positions	16

Technical data	
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V

DFK-MSTB 2,5/16-G-5,08 Order No.: 0707374  
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0707374

Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	12 A
Nominal voltage $U_N$	320 V
Nominal cross section	2.5 mm <sup>2</sup>
Maximum load current	12 A
Insulating material	PA
Inflammability class acc. to UL 94	V2
Max. current slip-on connection	8 A
Dimensions of slip-on connection	2.8 x 0.8 mm

#### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

#### Certificates / Approvals



Certification

CB, CSA, CUL, GOST, UL, VDE-PZI

#### CSA

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A

#### CUL

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A


#### UL

Nominal voltage $U_N$	300 V
Nominal current $I_N$	10 A


DFK-MSTB 2,5/16-G-5,08 Order No.: 0707374  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0707374>

## Drawings

Drilling diagram

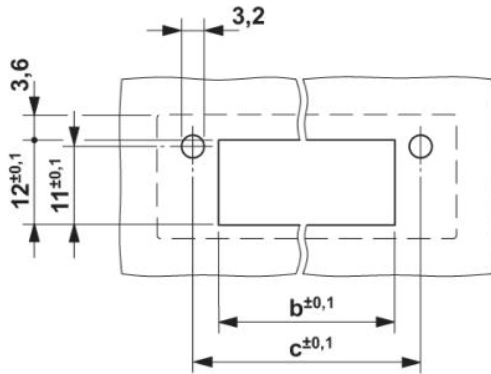

Dimensioned drawing

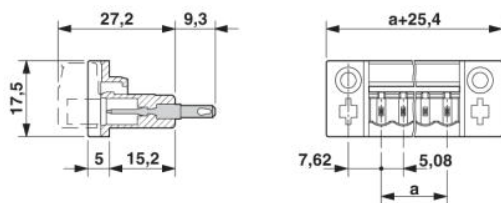

DFK-MSTB 2,5/16-G-5,08 Order No.: 0707374  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0707374>

---

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact  
Technical modifications reserved;

onlinecomponents.com