

Cover for Holder OGD, OGD-SMD



4W/10A



Standards

- IEC 60127-6 Edition 2.0
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals

- VDE Certificate Number: 4008993
- UL File Number: E39328

References

Mating cover to [OGD](#); [OGD-SMD](#)

Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Packaging details](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)


Technical Data

Fuse-Link	6.3 x 32mm
Rated Power Acceptance IEC	4W / 10A @ Ta 23°C
Admissible Ambient Air Temp.	-40°C to 85°C
Material: Cover	Thermoplastic UL 94V-0
Storage Conditions	0°C to 60°C, max. 70% r.h.

Soldering Methods	Reflow, Wave Soldering Profile
Solderability	245°C / 3sec acc. to IEC 60068-2-20, Test Td
Resistance to Soldering Heat	260°C / 10sec acc. to IEC 60068-2-20, Test Td
Contact Resistance	< mΩ at 20 mV

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimension

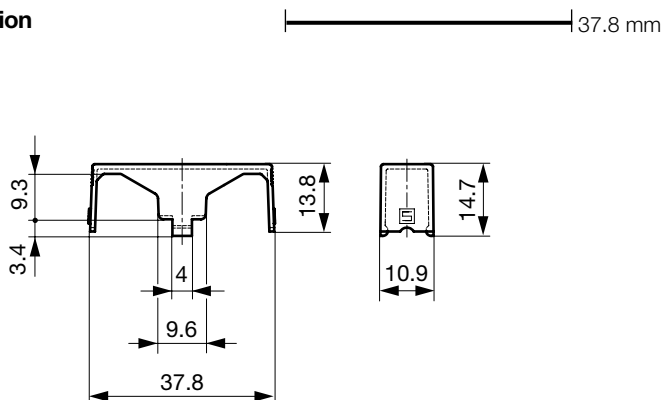

All Variants

Description	Order Number
Reflow-Cover	0853.0917

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

Bulk (100 pcs.)
