

## Han K 32-55-F-C

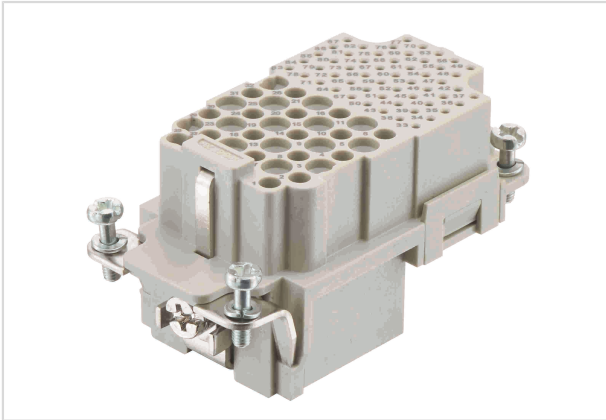


Image is for illustration purposes only. Please refer to product description.

Part number	09 38 087 3101
Specification	Han K 32-55-F-C
HARTING eCatalogue	<a href="https://b2b.harting.com/09380873101">https://b2b.harting.com/09380873101</a>

### Identification

Category	Inserts
Series	Han-Com <sup>®</sup>
Identification	Han <sup>®</sup> K 32/55

### Version

Termination method	Crimp termination
Gender	Female
Size	10 B
Number of contacts	87
Number of signal contacts	55
Number of power contacts	32
PE contact	Yes
Details	Please order crimp contacts separately. 32x Han D <sup>®</sup> 55x D-Sub

### Technical characteristics

Conductor cross-section	0.09 ... 0.52 mm <sup>2</sup> Signal 0.14 ... 2.5 mm <sup>2</sup> Power
Rated current (signal)	4 A
Rated voltage (signal)	50 V
Rated impulse voltage (signal)	0.8 kV
Pollution degree (signal)	2
Rated current (power)	10 A



Pushing Performance  
Since 1945

## Technical characteristics

Rated voltage (power)	250 V
Rated impulse voltage (power)	4 kV
Pollution degree (power)	2
Rated voltage acc. to UL	600 V @ Power contacts 30 V @ Signal contacts
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	$\geq 500$

## Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076

## Commercial data

Packaging size	1
Net weight	47.5 g
Country of origin	China
European customs tariff number	85366990



**Pushing Performance**  
Since 1945

## Commercial data

eCl@ss

27440205 Contact insert for industrial connectors