




Side entry hoods with knurled screws

Identification No. of contacts Part No. Drawing Dimensions in mm


D-Sub

Hood ¹⁾ grey thermoplastic RAL 7032	9	09 67 009 0571	
	15	09 67 015 0571	
	25	09 67 025 0571	
	37	09 67 037 0571	
	50	09 67 050 0571	
	grey thermoplastic with internal tin-plate screening	9	09 67 009 0573
		15	09 67 015 0573
		25	09 67 025 0573
		37	09 67 037 0573
		50	09 67 050 0573
9-37 way for packaging density of 3 TE (15.24 mm)			

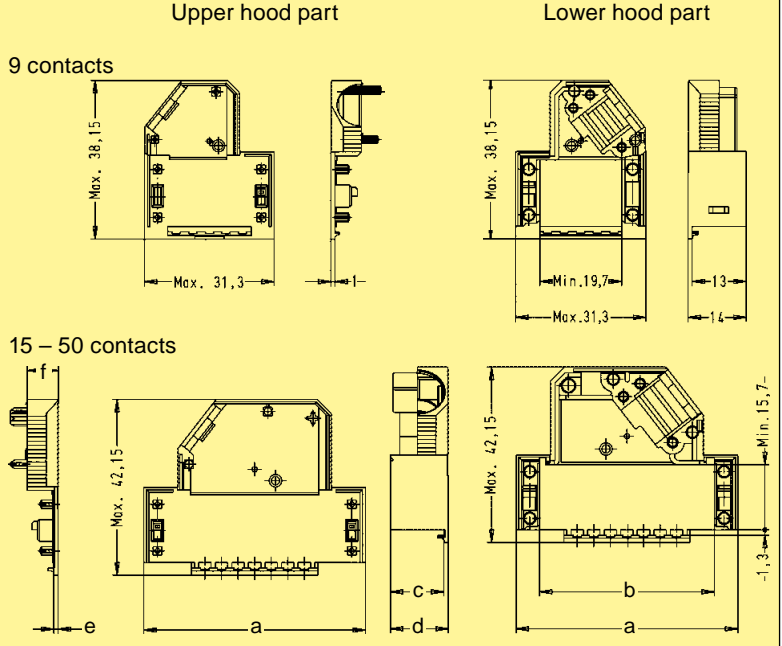

	a max.	b min.	c	d	e	f
15	39.62	28.40	13.00	14.00	1.00	7.50
25	53.52	42.20	13.00	14.00	1.00	7.50
37	69.80	58.65	13.00	14.00	1.00	7.50
50	67.41	56.18	16.00	17.50	1.50	9.50

Knurled screw	9-50	09 67 000 9971 ²⁾
		09 67 001 9965*
Thread UNC Thread M3		
Thread UNC Thread M3	9-50	09 67 001 9978
		09 67 001 9977

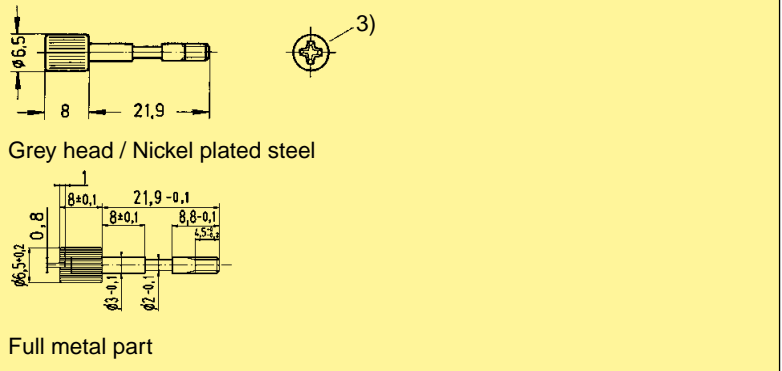

Tooling for assembly of hoods	09 99 000 0215*
	09 99 000 0216*
Top part	
Bottom part	



* Not normally kept in stock
¹⁾ Order knurled screw separately
²⁾ 9 way 1 per hood – 15-50 way 2 per hood

³⁾ Screw driver type ISO PH 1 for philips screw No 1 ISO norm 4757
 Operating temperature for all hoods on this page: -30 °C ... +100 °C