#### Features:



## Wire Strippers/Cutters KLEIN-KURVE®

Additional Features:

- Easy-to-read markings.
- Precision shear-type blades.
- Cleanly shears 6-32 and 8-32 screws.



Cat. No.	Handle Color	Overall Length	Strips and Cuts	Screw Shearing	Weight (lbs.)
11053	blue/red	7-1/8" (181 mm)	6 – 12 AWG stranded (10 mm² – 2.5 mm²)	6-32 & 8-32	.34
11055	blue/yellow	7-1/8" (181 mm)	10-18 AWG solid (4.0 mm <sup>2</sup> 75 mm <sup>2</sup> ) & $12-20$ AWG stranded (2.5 mm <sup>2</sup> 50 mm <sup>2</sup> )	6-32 & 8-32	.34
11057	blue/red	7-1/8" (181 mm)	20 - 30 AWG solid (.50 mm <sup>2</sup> 14 mm <sup>2</sup> ) & $22 - 32$ AWG stranded (.34 mm <sup>2</sup> 05 mm <sup>2</sup> )	6-32 & 8-32	.32

## **Dual NM Cable Strippers/Cutters KLEIN-KURVE**®

Additional Features:

- 10/2, 12/2, and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Stripping holes easily remove insulation on 10, 12, and 14 AWG lead wire.
- Precision staggered blades for square, clean cuts on solid copper wire.
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire.











K1412

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Screw Shearing	Weight (lbs.)
K1210	yellow/orange	7-3/4" (197 mm)	10 & 12 AWG solid (4.0 mm <sup>2</sup> & 2.5 mm <sup>2</sup> )	10/2 & 12/2	6-32 & 8-32	.43
K1412	yellow/white	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm <sup>2</sup> & 1.5 mm <sup>2</sup> )	12/2 & 14/2	6-32 & 8-32	.41

All dimensions are in inches and (millimeters).

**AWARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock

**AWARNING:** Never use on or near live electrical circuits.



## **Wire Strippers/Cutters**

## QTR-Turn™ NM Cable Stripper/Cutter KLEIN-KURVE®

Additional Features:

- Exclusive QTR-TURN™\* technology to quickly remove outer jacket of NM Cable.
- Strips, cuts, and loops 12 & 14 AWG solid wire.
- Cleanly shears 6-32 and 8-32 screws.
- Serrated nose bends, shapes, and pulls wire.



Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM Cable	Screw Shearing	Weight (lbs.)	
K1412-3	yellow/blue	7-3/4" (197 mm)	12 & 14 AWG solid (2.5 mm <sup>2</sup> & 1.5 mm <sup>2</sup> )	12/3 & 14/3	6-32 and 8-32	.41	
OTD TUDOUTMAN AND AND AND AND AND AND AND AND AND A							

QTR TURN<sup>TM</sup> is a trademark of Stride Tool Incorporated \*patent pending

## Bent Nose NM Romex® Cable Stripper/Cutters KLEIN-KURVE®

Additional Features:

- Patented 90° bent nose for easy work in confined spaces.
- Quickly removes outer jacket of Romex® Cable.
- Strips, cuts, and loops 10, 12 or 14 AWG solid wires.
- Cleanly shears 6-32 & 8-32 screws.
- Serrated nose bends, shapes, and pulls wire.







K90-12/2

KLEIN TOOLS WOLLD

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM Cable	Screw Shearing	Weight (lbs.)
K90-10/2	yellow/orange	7-3/8" (187 mm)	10 AWG solid (4.0 mm²)	10/2	6-32 and 8-32	.41
K90-12/2	yellow/yellow	7-3/8" (187 mm)	12 AWG solid (2.5 mm²) & 18 AWG stranded (1.0 mm²)	12/2	6-32 and 8-32	.41
K90-14/2	yellow/white	7-3/8" (187 mm)	14 AWG solid (1.5 mm²) & 18 AWG stranded (1.0 mm²)	14/2	6-32 and 8-32	.41

Romex® is a registered trademark of Southwire Company.

#### **Dual NM Cable Stripper/Cutter**

- 12/2 and 14/2 stripping slots quickly remove outer jacket of Type NM-B nonmetallic-sheathed cable.
- Cushion grip handles provide comfort.
- Precision-ground stripping holes easily remove insulation on 12 and 14 AWG lead wires.
- Strong-gripping serrated nose; easy bending, shaping and pulling of wire.
- Narrow nose fits into tight places.
- Precision shear-type blades for square, clean cuts on solid copper wire.
- Holes for quick wire looping and bending.
- 6-32
- Spr
- Ha

2. 1/ M	EIN TOOLS CAT NO MIZ







1412

32 and 8-32 screw-shearing holes.	Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Screw Shearing	Weight (lbs.)
oring-loaded for self-opening action.	1412	vellow	7-7/8"	12 & 14 AWG solid	12/2 & 14/2	6-32 & 8-32	.39
andy closure lock for convenient storage.		,	(200 mm)	(2.5 mm <sup>2</sup> & 1.5 mm <sup>2</sup> )			

#### Type NM Cable Strippers/Cutters

- Patented stripping slot quickly removes outer jacket of Type NM-B nonmetallic-sheathed cable.
- Handle grips with cushion ridges provide comfort.
- Precision-ground stripping hole easily removes insulation on lead wires.
- Serrated nose easily bends, shapes, or pulls wire.
- Narrow nose fits into tight places.
- Shear-type steel blades for square, clean cuts on solid copper wire.
- Spring-loaded for self-opening action.
- Handy closure lock for convenient storage.
- Holes for looping and bending wire.
- Handle tip identifies size of cable.



1012

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Type NM-B Cable	Weight (lbs.)
1012	yellow/grey with marking 12/2 at tip	6-1/4" (159 mm)	12 AWG solid (2.5 mm²)	12/2	.26
1014	yellow/white with marking 14/2 at tip	6-1/4" (159 mm)	14 AWG solid (1.5 mm²)	14/2	.26

All dimensions are in inches and (millimeters).

**AWARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock. **AWARNING:** Never use on or near live electrical circuits.

KLEIN TOOLS

KLEIN TOOLS

KLEIN TOOLS


KLEIN TOOLS

11045

11048





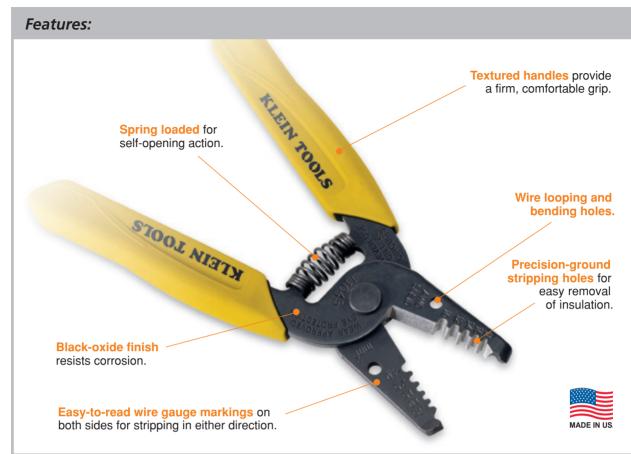

#### **Wire Strippers/Cutters**

Additional Features:

- Compact, lightweight wire-stripping and cutting tools.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.
- Do not use for cutting steel wire or bolts.

Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
yellow	6-1/4" (159 mm)	10 – 18 AWG solid (4.0 mm² – .75 mm²)	.27
red	6-1/4" (159 mm)	16 - 26 AWG stranded (1.0 mm²14 mm²)	.27
yellow	6-1/4" (159 mm)	22 - 30 AWG solid (.34 mm <sup>2</sup> 05 mm <sup>2</sup> )	.27
red	6-1/4" (159 mm)	8-16 AWG stranded (6 mm <sup>2</sup> -1.0 mm <sup>2</sup> )	.27
	yellow red yellow	yellow 6-1/4" (159 mm) red 6-1/4" (159 mm) yellow 6-1/4" (159 mm)	yellow 6-1/4" (159 mm) 10 -18 AWG solid (4.0 mm²75 mm²)  red 6-1/4" (159 mm) 16 - 26 AWG stranded (1.0 mm²14 mm²)  yellow 6-1/4" (159 mm) 22 - 30 AWG solid (.34 mm²05 mm²)

#### **Dual-Wire Stripper/Cutter**

Additional Features:

- Strips two wires in a single motion.
- Paired stripping holes for 14 and 12 AWG solid wire.
- One stripping hole for 10 AWG solid wire.
- Shear-type cutting blades for square, clean cuts.
- Narrow nose fits into tight places.
- Hardened steel with precision ground stripping holes.

**AWARNING:** NOT insulated. Will NOT protect against electrical shock.

Cat. No.	Handle Color	Overall Length	Strips and Cuts	Weight (lbs.)
11048	yellow	6-1/4" (159 mm)	10, 12, 14 AWG solid (4.0 mm <sup>2</sup> , 2.5 mm <sup>2</sup> , 1.5 mm <sup>2</sup> )	.27



**AWARNING:** Never use on or near live electrical circuits.

All dimensions are in inches and (millimeters).

#### **Wire Strippers/Cutters**

#### Wire Stripper/Cutter – Solid and Stranded Wire

- Strips six standard wire sizes without nicking wire.
- Scissors action of 1/2" (13 mm) wide cutter makes clean cuts with little effort.
- Serrated nose jaws to bend, shape or pull wire; holes for looping wire ends.
- Spring-loaded for self-opening action.
- Comfortable, plastic-covered handles.

Cat. No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
1011	6-1/8" (156 mm)	10 – 20 AWG solid & stranded (4.0 mm² – .50 mm²)	blue	.23



#### Adjustable Wire Strippers/Cutters - Solid and Stranded Wire

- A handy, light, compact tool for stripping insulation.
- Convenient hole for looping or bending wire.
- Black-oxide finish with plastic-dipped handles.
- Cuts, strips, and loops 12-26 solid and stranded wire.
- Adjustable slide stop with set screw for repeat stripping work.

Cat. No.	Hold-Open Spring	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
1004	yes	5" (127 mm)	12 – 26 AWG solid & stranded (2.5 mm² – 0.14 mm²)	yellow	.18
1003	no	5" (127 mm)	12 – 26 AWG solid & stranded (2.5 mm² – 0.14 mm²)	yellow	.14





1004

11063

#### Adjustable Wire Stripper – Solid and Stranded Wire

- Simply dial desired wire size for fast, easy stripping.
- Adjustable tool makes short work of cutting and stripping operations.
- Finely honed nose cutter easily gets into tight areas.
- Wire gauge dial sets stripping dies to proper size, helps prevent nicked wire.
- Black-oxide finish with plastic-dipped handles.
- Spring-loaded design tool opens automatically after each action.


Cat. No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
74007	5-1/8" (130 mm)	12 – 24 AWG solid & stranded (2.5 mm² – .25 mm²)	yellow	.15



## Katapult™ Wire Stripper – 8-22 AWG KATAPULT

- Quick and easy 8-22 AWG wire stripping.
- Compound action wire stripping: grip and strip via single action squeezing motion.
- Precision machined stripping holes easily remove jacket insulation without damaging the wire.
- Remove up to 1" (24mm) in length of the insulation layer (jacket layer) in a single step.
- Tension loaded wire-grip gently holds the cable in place while retaining the cable geometry.
- Recoil spring design returns tool to ready position upon cycle completion.
- Cast alloy chassis with heavy-duty Ecoat finish for corrosion resistance and durability.
- Katapult™ Coaxial Cable Stripper RG6 (Cat. No. VDV110-045) is also available.
- Additional precision machined steel cutting blades available.

Cat. No.	Color	Strips	Overall Length	Weight (oz.)
11063	blue/black	8-22 AWG (6 mm2 – .34 mm2)	6.6" (168 mm)	12.1
Wire Stop/Gauge				
11081 adjustable wire stop				.01

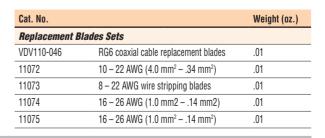


All dimensions are in inches and (millimeters)

**AWARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

**AWARNING:** Never use on or near live electrical circuits.





## **Combination Wire-Stripping and Cutting Tools**

#### **Multi-Purpose 6-in-1 Tool**

- Cleanly shears bolts.
- Easily cuts and strips wire.
- Measures stud sizes.
- Gauges wire sizes.
- Crimps insulated terminals.
- Plastic-covered cushioned handles for comfort.



1000

Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)
1000	7-3/4" (197 mm)	10 – 22 AWG (4.0 mm² – .34 mm²)	4-40, 6-32, 8-32, 10-24, 10-32	red	.44

#### Multi-Purpose Electrician's Tool - 8-22 AWG

- Two wire cutters—one at tip, the other halfway back near stripping holes double the utility of this tool.
- Color-coded crimping dies for 10-22 AWG insulated and non-insulated terminals.
- Cleanly shears bolts.
- Pivot nut adjusts tension.
- Wire-looping holes near tip.
- Full-sized, plastic-covered cushioned handles for comfort.





1001

Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)
1001	8-1/2" (216 mm)	8 – 18 AWG solid (6.0 mm² – 1.0 mm²) 10 – 22 AWG stranded (4.0 mm² – .34 mm²)	4-40, 6-32, 8-32, 10-24, 10-32	red	.47

#### **Multi-Purpose Tool - 10-22 AWG**

- Crimps insulated and non-insulated terminals, lugs and splices.
- Crimps 7 mm ignition and distributor terminals.
- Easily cuts and strips wire.
- Cleanly shears bolts.
- Wire cutter in nose.
- Plastic-covered cushioned handles for comfort.



1002

Cat. No.	Overall Length	Strips and Cuts	Bolt Sizes	Handle Color	Weight (lbs.)
1002	8-1/2" (216 mm)	10 – 22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> )	4-40, 6-32, 8-32, 10-24, 10-32	red	.46

All dimensions are in inches and (millimeters).

**AWARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock

**AWARNING:** Never use on or near live electrical circuits.



# Stripp Crimp



## **Combination Wire-Stripping and Cutting Tools**

#### **Long-Nose Multi-Purpose Tool**

- Easily cuts and strips wire.
- Narrow, serrated pliers nose to pull, loop, and bend wire.
- Long, curved cutting blade.
- Cutters and strippers are in front of the pivot for maximum ease-of-use in reaching into tight places.
- Crimps insulated and non-insulated terminals and 7 to 8 mm ignition terminals.
- Cleanly shears bolts.
- Plastic-covered cushioned handles for comfort.

Cat. No.	Overall Length	Bolt Sizes	Strips and Cuts	Connectors	Handle Color	Weight (lbs.)
1010	8-1/4" (210 mm)	4-40, 5-40, 6-32, 8-32, 10-32, 10-24	10 – 22 AWG (4.0 mm <sup>2</sup> – .34 mm <sup>2</sup> )	10 – 22 gauge	blue	.43

74017

#### **Trip-Saver**®

- Unique multi-tool addresses the special needs of electricians and maintenance professionals while providing many other features handy on any job.
- Compact, lightweight, and very sturdy.
- Produced from high-carbon, rust-resistant stainless steel.
- Specially designed locking "L" handle snaps securely into the "L" channel, locking the fully opened blade or implement in place during use.
- Features the following: Needle-Nose Pliers, Beveled Wire Cutter, Toothed Pipe Grippers, Files (coarse and fine), 5-Slot Wire Stripper (10-18) AWG, Wire-Looping Hole, Scraper, Awl/Reamer, Serrated Sheepsfoot Knife, Clip-Point Knife, Standard/Metric Ruler, Drywall Saw, Locking "L" Handle, #1 and #2 Phillips Hex Bits, Small-Slotted Hex Bit, Large-Slotted Hex Bit, 1/4" Socket Adapter, Lanyard Hole, Nylon Pouch.



1016

1010

KLEIN TOOLS

Cat. No.	Overall Length	Weight (lbs.)
1016	5-3/4" (143 mm)	.95

**AWARNING:** Close handles to lock blade in place before use.

## **NM Cable Ripper**

#### **NM Cable Ripper**

- Easy-to-use cable ripper.
- Slit the outer jacket of Romex® cable (all sizes) and other nonmetallic (type NM) sheathed cable.

Measure conductor wire gauge.



Romex<sup>®</sup> is a registered trademark of Southwire Company.

#### **Crimping Tools**

# Crimping/Cutting Tools — Non-Insulated/Insulated Terminals

- Crimping die marked for insulated and non-insulated solderless terminals and connectors.
- Tapered nose design for working in confined spaces.
- Specially hardened wire cutter in nose.
- Hot-riveted joint for smooth action and no handle wobble.



Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)		
1005	red	10 – 22 AWG	9-3/4" (248 mm)	.80		
Journeyman Series – Dual-material handles						
J1005	red/black	10 – 22 AWG	9-3/4" (248 mm)	.84		

All dimensions are in inches and (millimeters).

**AWARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

**AWARNING:** Never use on or near live electrical circuits.

**AWARNING:** Always wear approved eye protection.

56

9-3/4" (248 mm)

.85

# Crimping/Cutting Tool — Non-Insulated Terminals

- Designed for crimping non-insulated solderless terminals and connectors.
- Specially hardened wire cutter in nose.
- Tapered nose for working in confined spaces.
- Plastic-dipped cushioned handles for comfort.

1	(4)	4		
				1006
Cat. N	lo. Handle	e Color Crimps	Overall Lei	ngth Weight (lbs.)

10 - 22 AWG

#### Large Crimp Tool – Compound-Action

- Crimps #6-4/0 AWG battery lugs and terminals
- Ultra-comfortable hand grips for easy use.
- All-in-one, integral crimp nest.No removable parts or rotating dies.
- High-leverage handles andcompound-action mechanism forsuperior mechanical advantage.

1006

black

Adjustment screw allows user to control crimp depth.

Cat. No.	Crimps	Handle Color	Overall Length	Weight (lbs.)
2006	#6 – 4/0 AWG battery lugs and terminals	red	19-1/2" (495 mm)	3.80

2006

## **Ratcheting Crimpers**

## Full-Cycle Ratcheting Crimper — Insulated Terminals

- Crimps insulated terminals in wire sizes 22-16 (front cavity), 16-14 (middle cavity), and 12-10 (rear cavity).
- Color-coded wire size markings.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.



T1715

Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)
T1715	black	10 – 22 AWG	9" (229 mm)	1.05

# **Compound-Action Ratcheting Crimper – Insulated Terminals**

- Compound-action tool crimps 10-22 AWG insulated terminals to meet or exceed MIL-SPEC pull-out tests.
- Built-in ratchet with safety release assures uniform crimps every time.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Special locator quickly positions terminal for double crimp.
- Comfort-grip plastic handles.

imo	T1710

T1710

T1720

Cat. No.	Handle Color	Crimps	Overall Length	Weight (lbs.)
T1710	black	10 – 22 AWG	9" (229 mm)	1.29

#### **Full-Cycle Coax Ratcheting Crimper**

- Crimps hex-configuration (in dimensions across flats) coaxial connectors.
- Dimensions clearly marked for quick identification.
- Front cavity (.262") for RG-59.
- Middle cavity (.324") for RG-5, 6, 21, 143, 212, 222, and 304, also for Belden 8281, 9231 and 9141.
- Rear cavity (.384") for RG-8, 9, 11, 149, and 213.
- Ratchet release allows quick removal of incorrectly placed connector prior to completing crimp.
- Compound lever-action of narrow-span handles puts more crimping power into each squeeze.
- Comfort-grip plastic handles.
- Tool jaws will not open until the crimp is completed.
   They release and open automatically when crimp is done.

Cat. No.	Handle Color	Hex Configurations	Overall Length	Weight (lbs.)
T1720	black	front cavity .262"; middle cavity .324"; rear cavity .384"	9" (229 mm)	1.30

All dimensions are in inches and (millimeters).

**AWARNING:** NOT insulated. Plastic-dipped or slip-on plastic handles are NOT intended for protection against electrical shock.

**AWARNING:** Never use on or near live electrical circuits.



