


Number of contacts

48

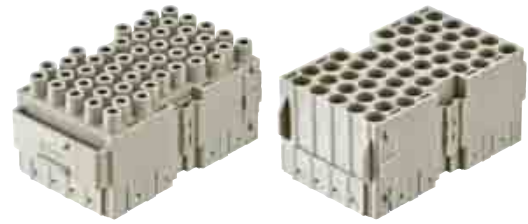

Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Han-Yellock® Monoblock 60 Order crimp contacts separately suitable for hoods/housings size 60	11 05 648 3001	11 05 648 3101		

Identification	Wire gauge (mm ²)	Part number		Drawing	Dimensions in mm																																				
		Male contact	Female contact																																						
Han-Yellock® crimp contacts Han-Yellock® TC20																																									
silver plated 	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208	<table border="1"> <thead> <tr> <th colspan="2">Wire gauge</th> <th colspan="2">Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14-0.37</td> <td>mm²</td> <td>AWG 26-22</td> <td>6.5 mm</td> </tr> <tr> <td>0.5</td> <td>mm²</td> <td>AWG 20</td> <td>6.5 mm</td> </tr> <tr> <td>0.75</td> <td>mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1</td> <td>mm²</td> <td>AWG 18</td> <td>6.5 mm</td> </tr> <tr> <td>1.5</td> <td>mm²</td> <td>AWG 16</td> <td>6.5 mm</td> </tr> <tr> <td>2.5</td> <td>mm²</td> <td>AWG 14</td> <td>6.5 mm</td> </tr> <tr> <td>3</td> <td>mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> <tr> <td>4</td> <td>mm²</td> <td>AWG 12</td> <td>6.5 mm</td> </tr> </tbody> </table>	Wire gauge		Stripping length		0.14-0.37	mm ²	AWG 26-22	6.5 mm	0.5	mm ²	AWG 20	6.5 mm	0.75	mm ²	AWG 18	6.5 mm	1	mm ²	AWG 18	6.5 mm	1.5	mm ²	AWG 16	6.5 mm	2.5	mm ²	AWG 14	6.5 mm	3	mm ²	AWG 12	6.5 mm	4	mm ²	AWG 12	6.5 mm	
Wire gauge		Stripping length																																							
0.14-0.37	mm ²	AWG 26-22	6.5 mm																																						
0.5	mm ²	AWG 20	6.5 mm																																						
0.75	mm ²	AWG 18	6.5 mm																																						
1	mm ²	AWG 18	6.5 mm																																						
1.5	mm ²	AWG 16	6.5 mm																																						
2.5	mm ²	AWG 14	6.5 mm																																						
3	mm ²	AWG 12	6.5 mm																																						
4	mm ²	AWG 12	6.5 mm																																						
gold plated 	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228																																						

Removal tool for crimp contacts 		09 99 000 0319	09 99 000 0319		
---	--	-----------------------	-----------------------	--	--