

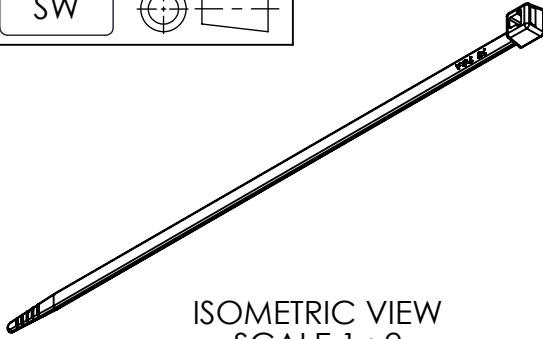

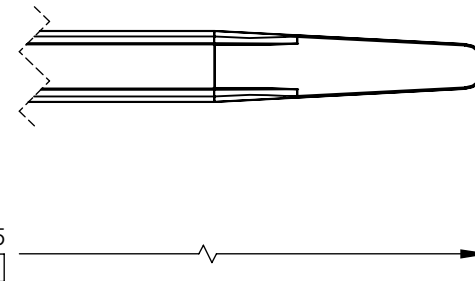
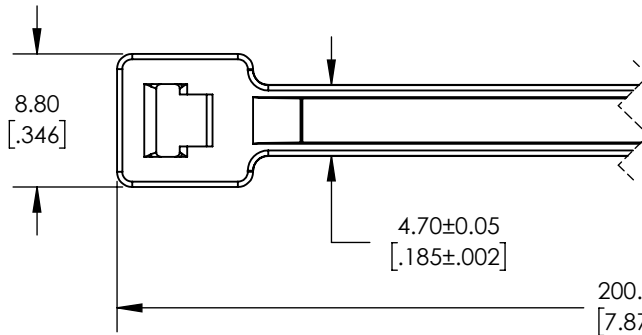

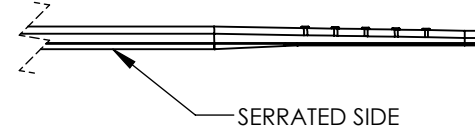


SW

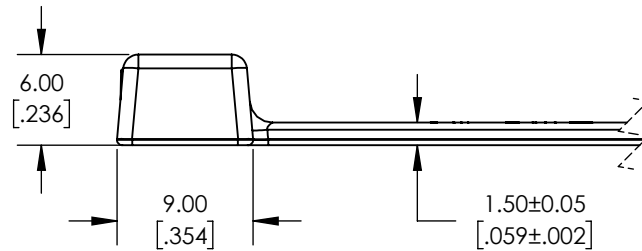

ISOMETRIC VIEW  
SCALE 1 : 2

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
06.1	Design Release	-	SEE ECN# 015273	CTF	07/09/2019	GAL	07/09/2019



**REFERENCE:  
PERFORMANCE REQUIREMENTS**

1. CABLE TIE MINIMUM LOOP TENSILE STRENGTH: 225N (50lbf)
2. TOOL APPLICATION MAXIMUM TENSION FORCE: 55N (12lbf)
3. BUNDLE DIAMETER RANGE: 8mm TO 50mm
4. TEMPERATURE RANGE: -40°C to +140°C [-40°F to +284°F]
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 50%



GLOBAL PART DESCRIPTION	MATERIAL	
	TYPE	COLOR
T50R-PVDF-GY	PVDF	GRAY

Material	Units: <b>millimeters</b>
SEE CHART	Dimension without tolerances details to:
	.xxx = ±.013
	.xx = ±.13
	.x = ±.3
	None = ±.8
	∠ = ±0.5°
	Dimension Formatted mm/[in]

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.
---

Drawn	CTF	1/11/2019
Approved	GAL	1/11/2019

**HellermannTyton**  
North America  
Email: corp@htamericas.com  
Web: www.hellermann.tyton.com

Article/Type-No	T50R
Title	<b>STANDARD T50R CABLE TIE</b>
Drawing-No	<b>17-2468-001-CSU</b>
Production : Phase	

Scale	2:1
Project Number	PRP 17-2468
Format	AH
Sheet	1/1