

## Han-Yellock 30 carrier hood button plain

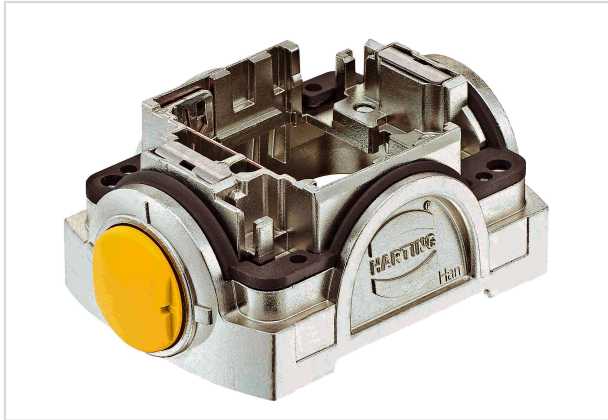


Image is for illustration purposes only. Please refer to product description.

Part number	11 12 300 0100
Specification	Han-Yellock 30 carrier hood button plain
HARTING eCatalogue	<a href="https://b2b.harting.com/11123000100">https://b2b.harting.com/11123000100</a>

### Identification

Category	Hoods/Housings
Series of hoods/housings	Han-Yellock®
Type of hood/housing	Carrier hood
Description of hood/housing	Plain push button

### Version

Size	Han-Yellock® 30
Locking type	Push button
Field of application	Hoods/housings for industrial applications

### Technical characteristics

Limiting temperature	-40 ... +125 °C
Un-/locking temperature	-10 ... +85 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65 IP67

### Material properties

Material (hood/housing)	Zinc die-cast
Surface (hood/housing)	Passivated
Colour (hood/housing)	Metallic
Material (seal)	NBR
Material (locking)	Polyamide (PA) Stainless steel



Pushing Performance  
Since 1945

## Material properties

Colour (locking)	Melon yellow
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead
California Proposition 65 substances	Nickel
California Proposition 65 substances	Naphthalene

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
Approvals	DNV GL
CE	Yes

## Commercial data

Packaging size	1
Net weight	216 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440202 Shell for industrial connectors