


HONEYWELL PART NUMBER
111SM7-T
PRODUCT CODE TYJ0760

REV	DOCUMENT	CHANGED BY	CHECK
9	0038225	PRS 04APR08	BLR

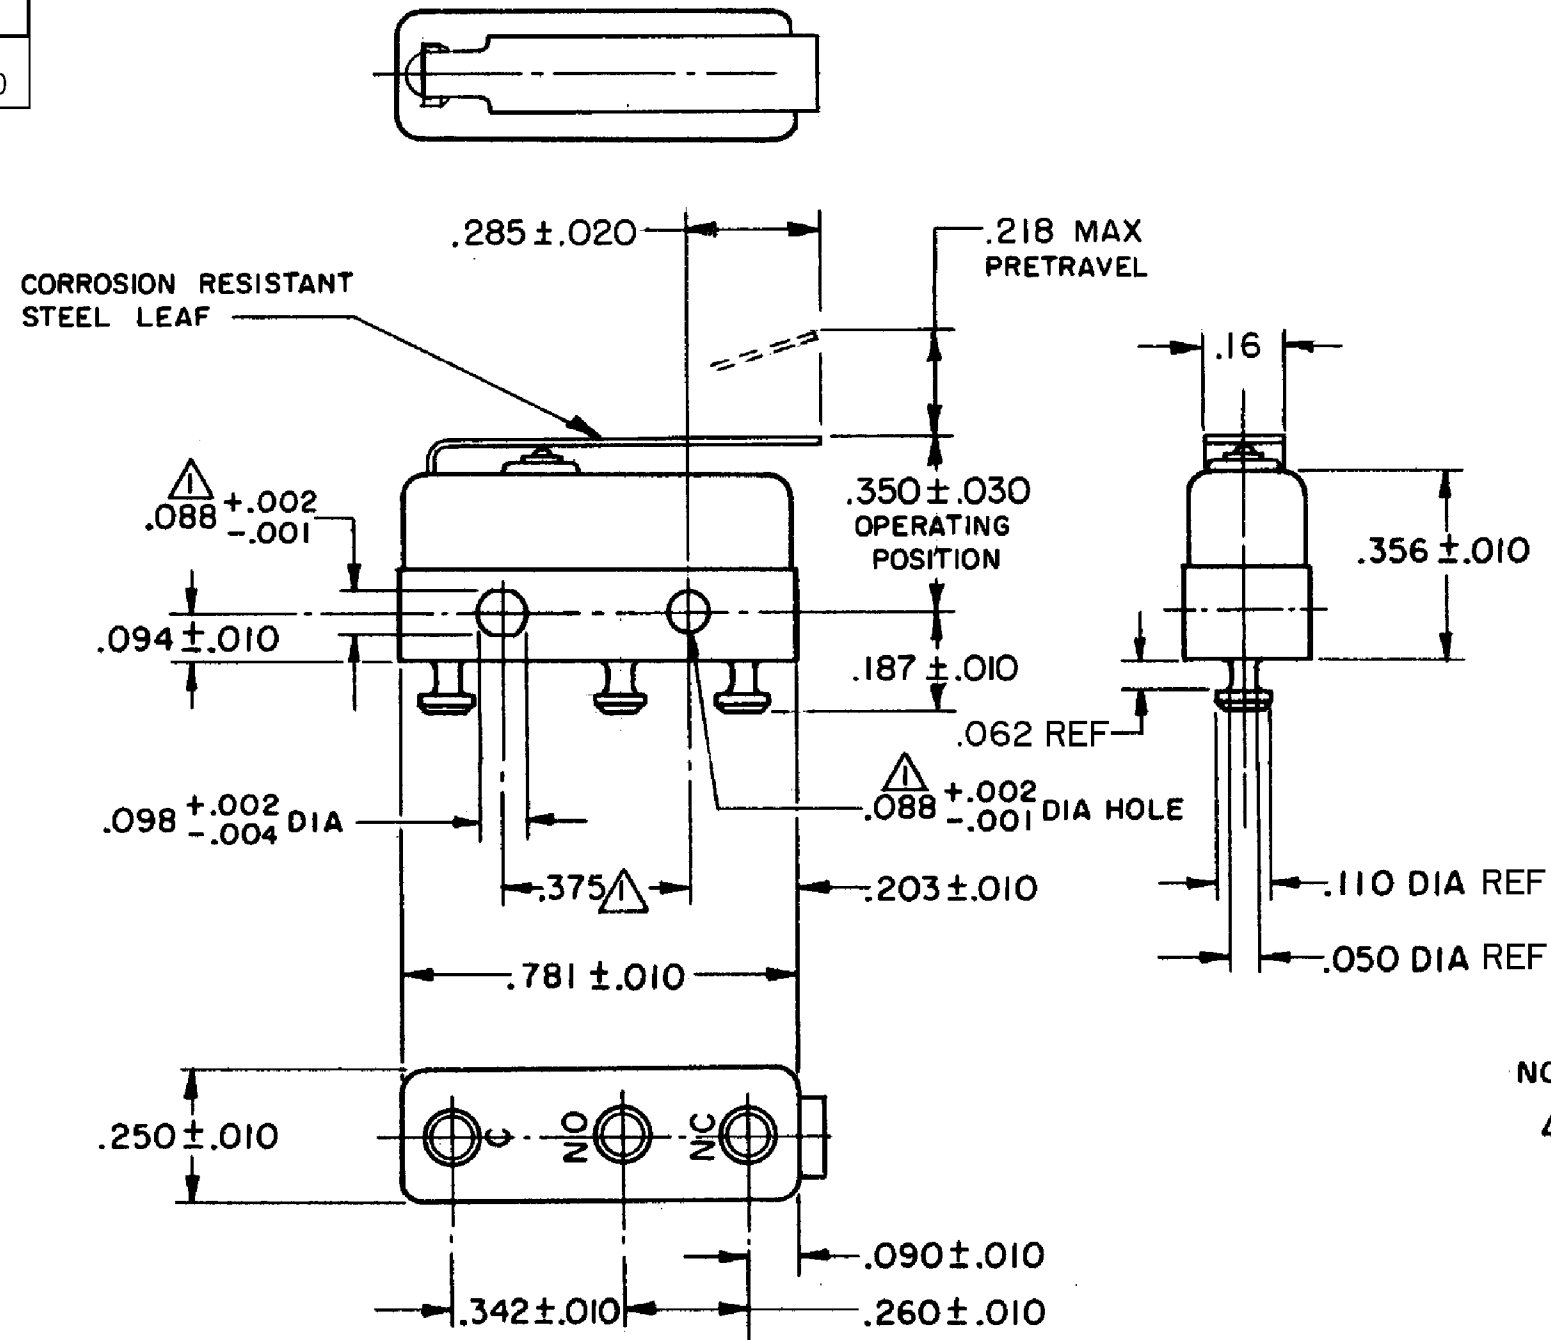

NOTE -  
 ▲ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250 ° F

RELEASE NO.	SR - 10098
REPLACES	-

CHARACTERISTICS
OPERATING FORCE - - - - 7 OZ MAX
RELEASE FORCE - - - - 2 OZ MIN
DIFFERENTIAL TRAVEL - - .035 MAX
OVERTRAVEL - - - - .030 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT SPDT
30 VOLTS DC RATING
SEA LEVEL 50,000 FT
INDUCTIVE 3 AMP 2.5 AMP
RESISTIVE 5 AMP 5 AMP
MAXIMUM INRUSH 24 AMP
APPROVALS KEMA, CE 5A, 250V ~ T85 1E4 UL, CSA 5A, 250 VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	26 OCT 07
CHECK	RJ	26 OCT 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	111SM7-T	9

RASTER	SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1
--------	---------	--------------------	--------------