


ISO 9001 / AS9100 Certified Company

Woodstock, IL 60098 Ph. (815)334-3600 Fax (815)337-0377 Or visit us at our website www.guardian-electric.com

Model 11L Latching DC Frame Solenoid

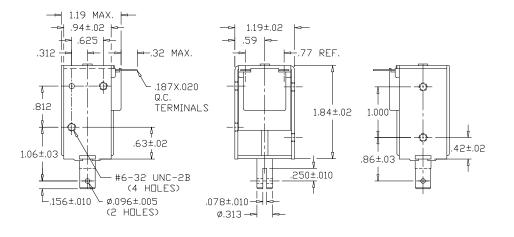

Solenoid shown energized and fully seated.

Total Weight: 5.2 oz. Plunger Weight: .6 oz.

Model No.	Part No.	Duty Cycle	Voltage	Resistance (Ω)	Power (W)	Current (mA)
11L-C-12D	A420-067860-00	Continuous	12VDC	35	4.3	343
11L-C-24D	A420-067862-00	Continuous	24VDC	146	4.1	164

When ordering, please refer to Part No., as listed above.

Consult factory for custom configurations.

* At 0 VDC (provided by permanent magnet latch).

	Holding Force (oz.)								
Stroke (in.)	0.050	0.125	0.250	0.375	0.500	0.625	0.750	1.000	-
Continuous Duty	35	20	14	6	4	2	1	n/a	*96

UL Recognition



Continuous Duty

100% 'On' Time

Recognized under the Component Recognition Program of **Underwriters Laboratories, Inc.**

<u>RoHS</u>

These parts comply with RoHS Directive 2002/95/EC