



MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

11SM1-T

DRAWING NUMBER
11SM1-T

ISSUE
M

11

PAGE 1 OF 1

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO22077
GCH	DEC 66
B	CO-77768
SAD	JUL 94
C	CO-82803-E
DLT	JAN 96
D	CO-95172
JJA	JUNE 99

CHECK

21 DEC 66

LS D



CHECK

1 DEC 66

GCH

FORMTEK

DRAWN

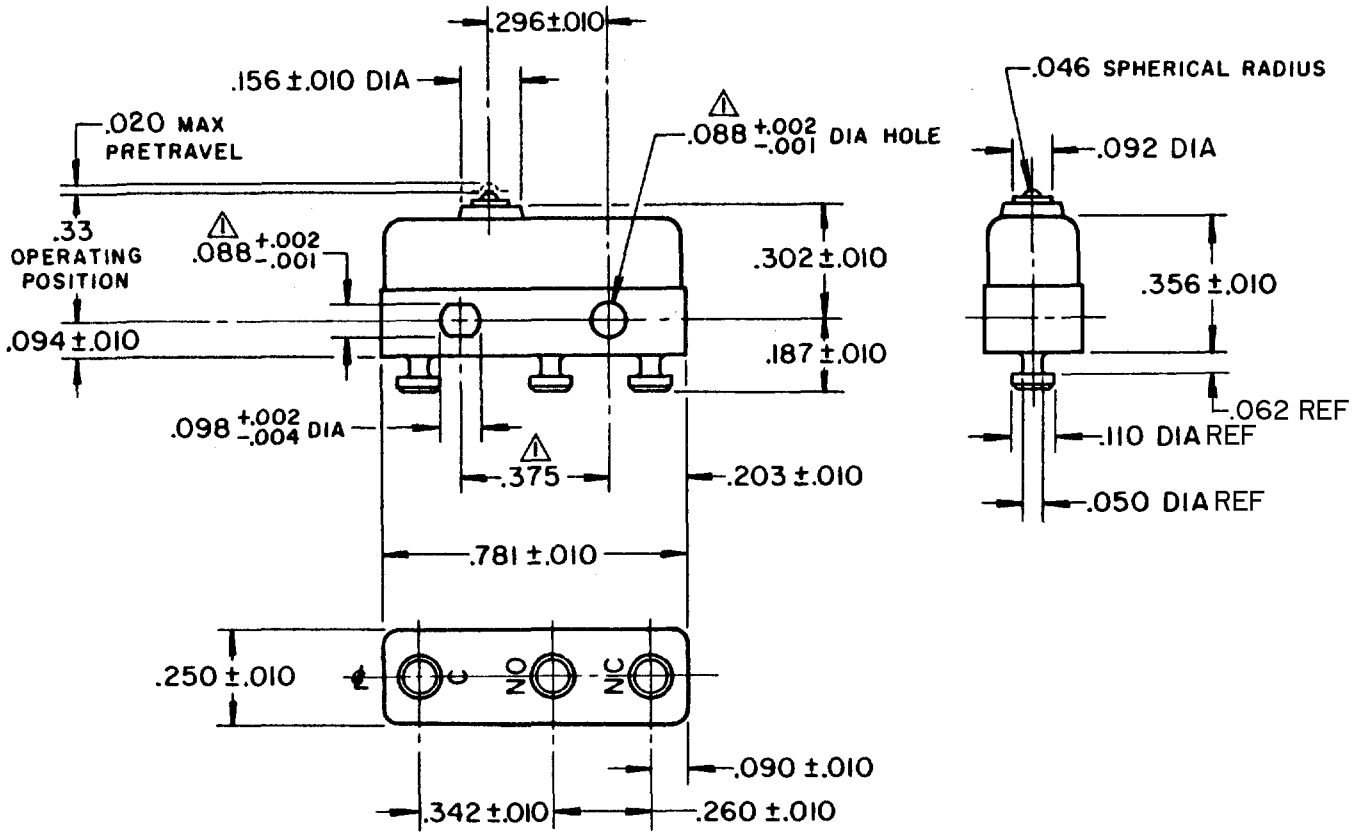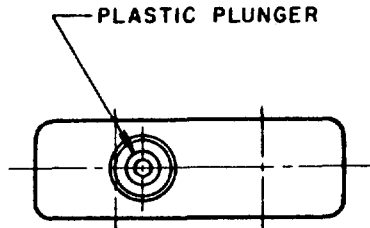

NOTE -

▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 3-5 OZ
RELEASE FORCE ----- 1 OZ MIN
DIFFERENTIAL TRAVEL ----- .004 MAX
OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		\pm

WEIGHT .006 LB MAX

L4

5A 250 VAC ~