

MICRO SWITCH

FREEMONT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
11SM22-H58


CATALOG LISTING
11SM22-H58
PAGE 1 OF 1
REPLACES
RELEASE NO. PR-438
DRAWING NUMBER
M
ISSUE
X
4

REVISIONS

A	C037565	7 SEPT 76
B	C063767	17 NOV 88
C	C095691	3 DEC 99

FORMTEK
FO-80378-1A

DEC 68
DEC 76
DEC 88
DEC 99

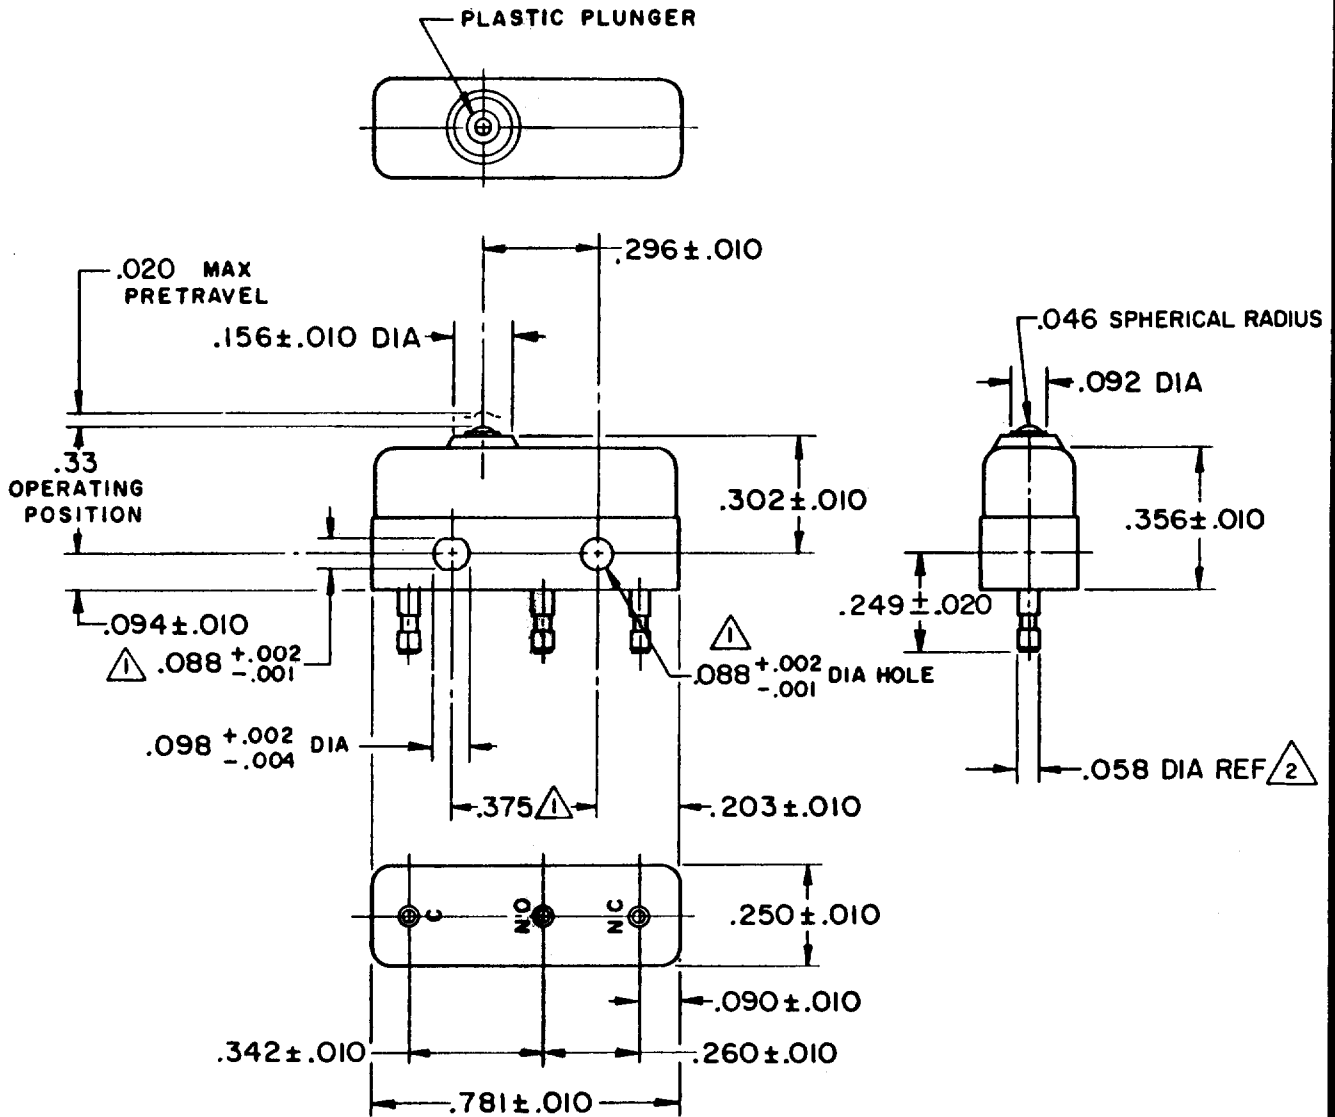

NOTE -
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 2 PLATED TERMINALS WILL ACCEPT "AMP INC".058 DIA PIN RECEPTACLES.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	3-5 OZ
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT SPDT	
30 VOLTS DC RATING	
INDUCTIVE	SEA LEVEL --- 3 AMP
	50,000 FT --- 2.5 AMP
RESISTIVE	SEA LEVEL --- 5 AMP
	50,000 FT --- 5 AMP
MAXIMUM INRUSH	--- 24 AMP

SCALE 2 TO 1
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
 ONE PLACE (.0) ±.030
 TWO PLACE (.00) ±.015
 THREE PLACE (.000) ±.005
 ANGLES ±

UNDERWRITERS' LAB. INC. LISTED RATING
-L4- 5A-250 VAC



WEIGHT .006 LB MAX