


Z-PACK HS3 Connector (Continued)

Vertical Pin Header Assemblies (Continued)
6 Row, Center Module

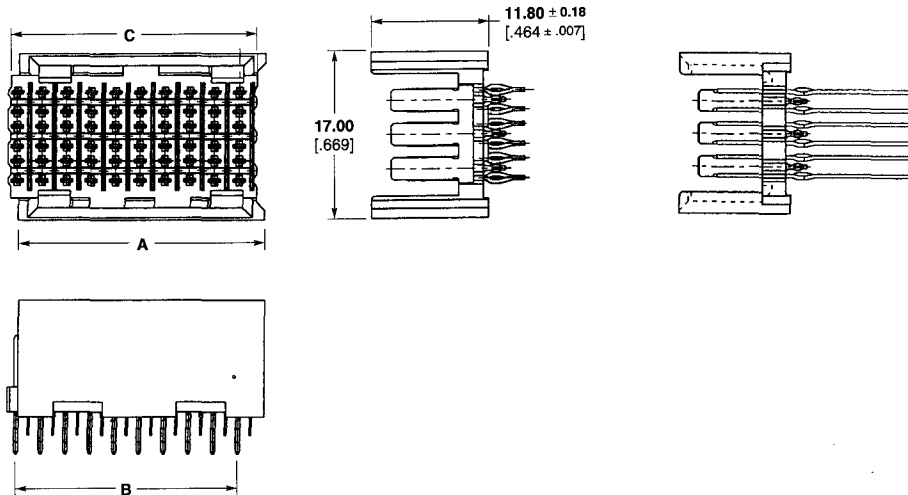


P.C.B. Hole Dimensions

- Drilled Hole — 0.7±0.025mm
- Fin. Hole — 0.55 to 0.65mm
- Cu-thickness — 0.025 to 0.050mm
- SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than tin-lead, reference Application Specification 114-13020.

Pin Header Assemblies

Number of Positions	Dimensions					Pin Ref.	Part Numbers	Application Tooling					
	A	B	C	D	E			Seating		Signal Pin		Ground Blade	
								Seating	IS Sheet	Repair Kit	IS Sheet	Repair Kit	IS Sheet
60	24.90	22.50	24.90	8.20	3.70	[Symbol]	120674-1	91313-2	408-4546	354687-2	408-9979	1320534-1	408-4573
	.980	.885	.980	.322	.145								
	24.90	22.50	24.90	9.70	3.70								
	.980	.885	.980	.381	.145								
30	24.90	22.50	24.90	8.20	13.00	[Symbol]	120679-1	91313-2	408-4546	354687-2	408-9979	1320534-1	408-4573
	.980	.885	.980	.322	.511								
	24.90	22.50	24.90	9.70	14.50								
	.980	.885	.980	.381	.570								
30	12.41	10.00	12.40	8.20	3.70	[Symbol]	120732-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	.488	.393	.488	.322	.145								
	12.41	10.00	12.40	9.70	3.70								
	.488	.393	.488	.381	.145								
30	12.41	10.00	12.40	8.20	13.00	[Symbol]	120742-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	.488	.393	.488	.322	.511								
	12.41	10.00	12.40	9.70	14.50								
	.488	.393	.488	.381	.570								

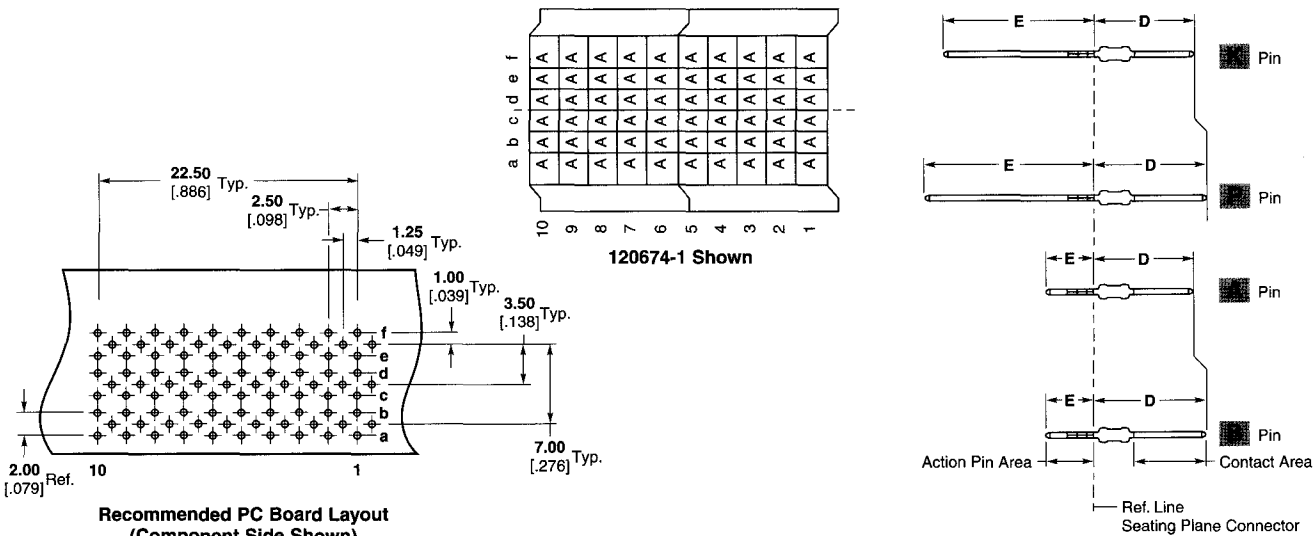

Recommended PC Board Layout (Component Side Shown) For Non-Midplane Applications For Midplane Applications Reference Page 60

2
Z-PACK HS3 Connector