
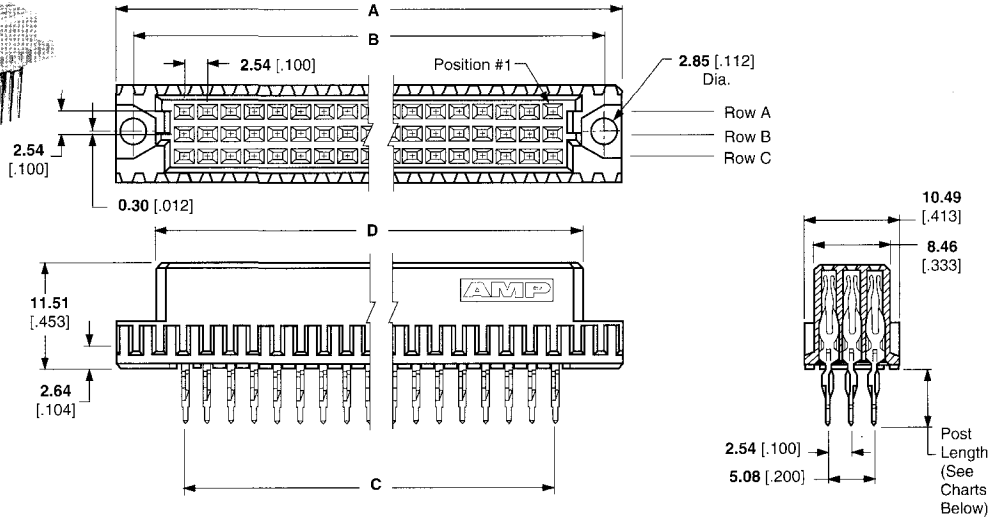


Type C Vertical Receptacle Assemblies with ACTION PIN Posts for PC Board Mount (0.64 [.025] Square)

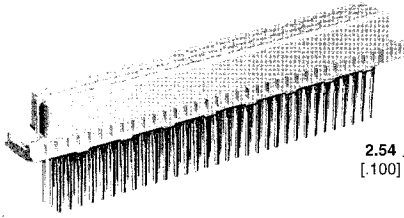

Material

Housing — Glass filled polymer
Contacts — Copper alloy

Related Product Data

- DIN Performance Levels** — Page 6
- Performance Specifications** — Page 7
- Mateable Connectors** — Pages 17, 19, 28, 52-54
- PC Board Hole Layout** — Page 58
- Accessories** — Pages 63, 64, 68, 69
- ACTION PIN Contacts** — Pages 70, 71
- Application Tooling** — Pages 72, 73
- Technical Documents** — Page 74:
DIN Specification 41612
IEC Specification 60603-2
Application Specification 114-9014
Instruction Sheets 408-6927, 408-9623

Standard Size (For PC Board Thicknesses of 2.36 [.093] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
96	A,B,C	95.00	90.00	78.74	85.00	13.00	II	215912-4 ³
		3.740	3.543	3.100	3.346	.512		1-215912-4 ¹
						.669		215614-4 ³
64	A,C	95.00	90.00	78.74	85.00	13.00	II	215913-4 ³
		3.740	3.543	3.100	3.346	.512		1-215913-4 ¹
						.669		215781-4 ³
								1-215781-4 ¹

Standard Size (For PC Board Thicknesses of 1.57 [.062] and Above)

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number	
		A	B	C	D				
96	A,B,C	95.00	90.00	78.74	85.00	13.00	II	215950-4 ³	
		3.740	3.543	3.100	3.346			.512	1-215950-4 ¹
								.669	148057-52, ³
								1-148057-51, ²	
								148059-5 ³	
64	A,C	95.00	90.00	78.74	85.00	13.00	II	1-148059-51, ²	
		3.740	3.543	3.100	3.346	.512		1-148167-51, ²	

Half Size

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
48	A,B,C	53.34	49.37	38.10	44.35	3.70	II	4-1393637-42, ³
		2.100	1.944	1.500	1.746	.146		

Third Size

Number of Positions	Rows Loaded	Dimensions				Post Length	DIN Level	Part Number
		A	B	C	D			
30	A,B,C	39.76	34.76	22.86	29.12	3.70	II	4-1393637-02, ³
		1.565	1.368	.900	1.146	.146		
20	A,C	39.76	34.76	22.86	29.12	3.70	II	4-1393637-22, ³
		1.565	1.368	.900	1.146	.146		

¹ Precious metal plating in contact area and 5.08 [.200] from tip of post.

² Toolless (flat rock) connectors.

³ Precious metal plating in contact area, tin lead on tails.

Note: Seating tool required, unless specified otherwise.

Type C Assemblies