


Product Details for 1 -281519 -0

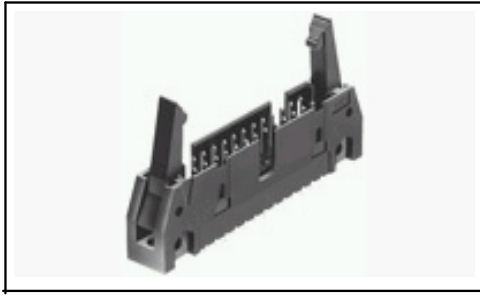

1 -281519 -0

[Active](#)

Pin and Pinless Headers (AMP -LATCH)

[RoHS Compliant \(Statement of Compliance\)](#)

Product Highlights:

- ? Connector Type = Pin Headers
- ? Standard Profile
- ? Number of Positions = 10
- ? 2.54 x 2.54 mm Centerline, Matrix
- ? PCB Mount Angle = Vertical

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [Latch pin header, MIL type, with stamped/rounded pos...](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? Connector Type = Pin Headers
- ? [Profile](#) = Standard
- ? [Number of Positions](#) = 10
- ? [PCB Mount Angle](#) = Vertical
- ? [PCB Retention Feature](#) = Without
- ? [Mating Connector Lock](#) = With
- ? [Housing Style](#) = 4 -Sided
- ? [Ejection Latches](#) = With
- ? Shrouded = Yes
- ? Mating Polarization = Without
- ? Mating Connector Lock Type = Ejection Latch

Termination Related Features:

- ? [Termination Post Length \(mm \[in\]\)](#) = 3.10 [0.122]

Body Related Features:

- ? [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 2.54 [.100 x .100]

Contact Related Features:

- ? [Contact Mating Area Plating](#) = Gold (8) over Nickel
- ? Contact Material = Phosphor Bronze
- ? Contact Termination Area Plating = Tin

Housing Related Features:

- ? Housing Material = Glass -Filled Polyester
- ? Housing Flammability Rating = UL 94V -0
- ? Housing Color = Black

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? [Temperature Rating](#) = Standard

Packaging Related Features:

- ? Packaging Quantity = 120

Other:

- ? Brand = AMP