REVISION			
REV.	DESCRIPTION	DATE	APPROVED

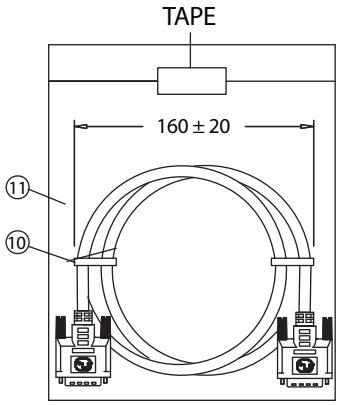

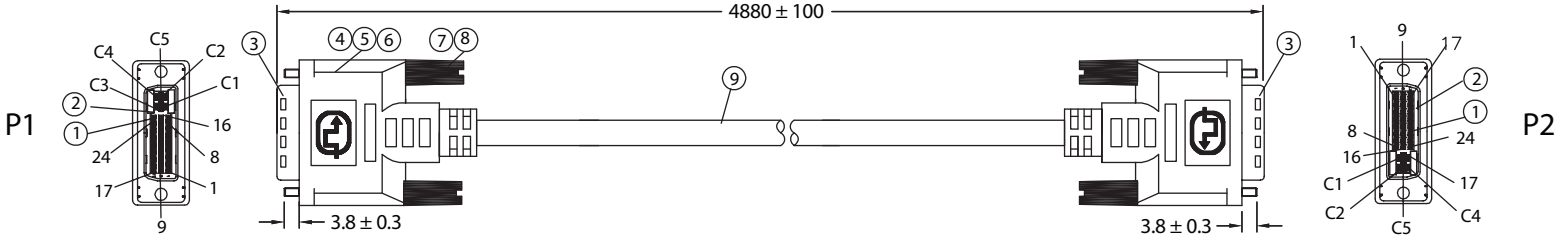

FRONT DVI (24+5)P/M ASS'Y TYPE DVI (24+5)P/M ASS'Y TYPE FRONT

PIN OUT

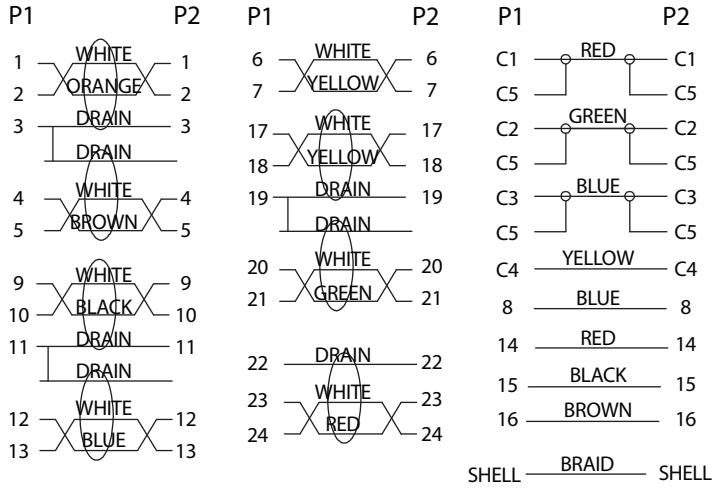

NOTES:

1. CABLE: UL20276
   [(28AWGx1P+DW+FOIL)x7+(28AWG+SP+FOIL)x3+28AWGx5C+28AWGx1P+MYLAR+FOIL+BD]x1
   OUTER JACKET: BEIGE, OD: 9.5 ± 0.3mm
   PRINTING: "E166307 AWM 20276 28AWG 80°C 30V VW-1
   LOW VOLTAGE COMPUTER CABLE
2. CONNECTORS: DVI (24+5)P/M - DVI (24-5)P/M
3. HOOD: ASS'Y TYPE. COLOR: BEIGE
4. CABLE ELECTRICAL TEST:
   <1>.100% OPEN SHORT & MISS WIRE TEST
   <2>. INSULATION RESISTANCE: DC400V 10M ohm MIN.
   <3>. CONDUCTOR RESISTANCE: 1 ohm MAX.
5. PACKING: 1PC/POLYBAG

No.	PARTS NAME	SPECIFICATION STANDARD	QTY	REMARKS
①	DVI (24+5)P/M - CONTACT	BRONZE/GOLD PLATED SOLDER TYPE	58	
②	DVI (24+5)P/M - INSULATOR	THERMOPLASTIC/BLACK UL94V-0	2	
③	DVI (24+5)P/M - SHELL	GOLD PLATED	2	
④	DVI (24+5)P/M - CAN	STEEL TIN PLATED	2	
⑤	COPPER FOIL	WIDTH: 15mm	2	
⑥	DVI (24+5)P/M - COVER	45P PVC/COLOR: BEIGE	2	
⑦	THUMB SCREW	#4-40 2.8x45, GOLD PLATED	4	
⑧	SCREW - MOLD	35P PVC / COLOR: BEIGE	4	
⑨	CABLE DVI 24+5 UL20276	KL03009ABK01A	1	
⑩	MINI TIE	PE/BLACK	2	
⑪	POLYBAG	PE/0.08x240x280mm	1	

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
WCT DIVISION

Part Number: 1321040-16 RoHS Compliant

Description: DVI (24+5)P/M - DVI (24-5)P/M

	Drawn / Date	Checked / Date	Approved / Date
	B. Grubb 03-12-07	03-12-07	JJH / 03-12-07