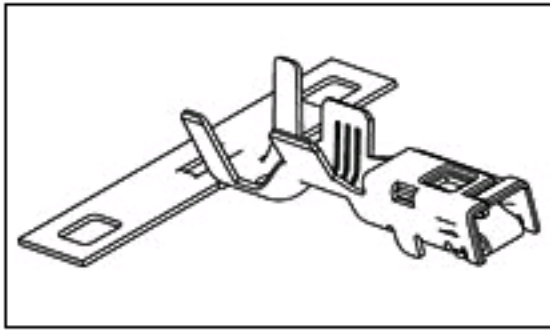


## 1326032-4 Product Details

[Share](#) | [Print](#) | [Email](#)


1326032-4

TE Internal Number: 1326032-4  
 Active

### Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Timer Products Product Line
- 2.5 mm System Series, USCAR Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

[Add to My Part List](#) | 
 [Request Sample](#) | 
 [Find Similar Products](#) | 
 [Buy Product](#)

### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [2.8mm RECEPTACLE, SEALED](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- [2.8-mm Terminal System \(Sealed and Unsealed\)](#) (PDF, English)

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Product Line = Timer Products
- Series = 2.5 mm System, USCAR
- [Product Type](#) = Contact
- Termination Method to Wire/Cable = Crimp
- Wire/Cable Type = Discrete Wire
- Insulation Support = With

#### Termination Features:

- Wire/Cable Size (AWG) = 16
- Wire/Cable Size (mm<sup>2</sup>) = 1.25 - 1.4

#### Dimensions:

- Mating Area Interface Dimensions (mm [in]) = 2.79 x 0.79 [.110 x .031]

#### Body Features:

- Single Wire Sealing System = Yes

#### Contact Features:

- Contact Type = Socket
- Contact Base Material = Copper Alloy
- Contact Plating, Mating Area, Material = Bright Tin
- Contact Plating, Mating Area, Thickness (µm [µin]) = 0.8 [31.49]

#### Configuration Features:

- GET 0.64 Connector System = No

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

#### Environmental:

- Operating Temperature (°C [°F]) = 125 [257]

#### Conditions for Usage:

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 1.88 - 2.34 [0.074 - 0.092]

#### Operation/Application:

- Application Use = Wire-to-Wire

#### Packaging Features:

- Packaging Method = Standard Reeling
- Packaging Quantity = 2,500

#### Other:

- Brand = TE Connectivity
- Comment = Refer to the application and product specification for additional information.

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

### Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference Products](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed

Receive TE News, Events & Technology Updates

