

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Turned 1.6 crimp contact, individual male contact, core diameter 2.5 mm², silver-plated



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	100 pc
GTIN	4 017918 123192
GTIN	4017918123192
Weight per Piece (excluding packing)	0.662 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C
---------------------------------	---------------

Mechanical characteristics

Conductor cross section	2.5 mm² 2.5 mm²
Connection cross section AWG	14
Stripping length of the individual wire	6 mm
Contact diameter	1.6 mm
Insertion/withdrawal cycles	≥ 500

General

١	Note	for HC-M-12, HC-M-17, HC-M-03/04, HC-M-EMV, HC-D, HC-DD, HC-Q, and VC-D contact carriers

11/25/2019 Page 1 / 4



Technical data

General

Туре	Individual male contact	
Series	HC-M-12	
Connection method	Crimp connection	
Contact type turned		
Assembly instructions	At voltages of < 5 V and currents < 5 mA, gold-plated contacts are recommended.	
nection The quality of a crimp connection is determined by DIN EN 60352-2.		

Material data


Contact material	Copper alloy
Contact surface material	silver-plated

Environmental Product Compliance

	Lead 7439-92-1	
China RoHS	Environmentally Friendly Use Period = 50	
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"	

Drawings

Dimensional drawing

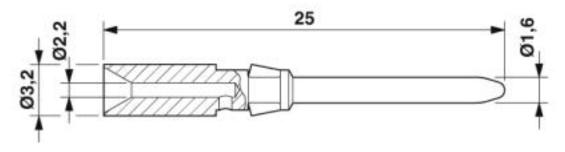

Classifications

eCl@ss

eCl@ss 4.0	27140800
eCl@ss 4.1	27140800
eCl@ss 5.0	27143400
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440204
eCl@ss 8.0	27440204



Classifications

eCl@ss			
eCl@ss 9.0		27440204	
ETIM			
ETIM 2.0		EC000796	
ETIM 3.0		EC000796	
ETIM 4.0		EC000796	
ETIM 5.0		EC000796	
ETIM 6.0		EC000796	
ETIM 7.0		EC000796	
UNSPSC			
UNSPSC 6.01		30211923	
UNSPSC 7.0901		39121522	
UNSPSC 11		39121522	
UNSPSC 12.01		39121522	
UNSPSC 13.2		39121522	
Approvals			
Approvals			
Approvals			
EAC / EAC			
Ex Approvals			
Approval details			
EAC	EAC		RU C- DE.Al30.B.01102
EAC	EAC		EAC-Zulassung



Accessories

Accessories

Assembly tool

Assembly tool - UNIFOX MT-CK 1.6/2.5 - 1089092



Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections

Crimping tool

Crimping pliers - CRIMPFOX-TC 4 - 1212113



Crimping pliers, for CK 1,6-ED..., CK 2,5-ED..., CK 4,0-ED... turned contacts, 4 marked die stations, unlockable pressure lock, lateral entry, incl. positioning tool

Universal tools

Contact removal tool - UNIFOX RT-CK 1.6 - 1072069



Contact removal tool, for turned and rolled CK- 1.6-... contacts

Phoenix Contact 2019 @ - all rights reserved http://www.phoenixcontact.com