


PCB terminal block - MKDS 3/ 8 - 1711084

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, Nominal current: 24 A, Nom. voltage: 400 V, Pitch: 5 mm, Number of positions: 8, Connection method: Screw connection with tension sleeve, Mounting: Wave soldering, Conductor/PCB connection direction: 0 °, Color: green, The article can be aligned to create different nos. of positions!

The illustration shows a 4-position version

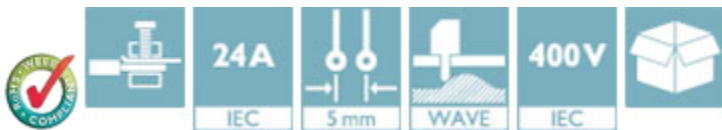

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 023683
Weight per Piece (excluding packing)	16.11 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Product type	Printed circuit board terminal
Approval	CSA
	SEV
	GL
	CCA
	EAC
	EAC
	cULus Recognized
	cULus Recognized
Rated voltage (IEC)	400
Rated current (IEC)	24

PCB terminal block - MKDS 3/ 8 - 1711084

Technical data

Mounting type	Wave soldering
Number of positions	8
Pitch	5 mm
Levels	single-level
Connection method	Screw connection with tension sleeve
Connection cross section	2.5
Conductor connection direction	0 °
Product family	MKDS 3

Classifications

eCl@ss

eCl@ss 4.0	27141109
eCl@ss 4.1	27141109
eCl@ss 5.0	27141190
eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 7.0	27440401
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002643
ETIM 5.0	EC002643

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Approvals

Approvals

CSA / SEV / GL / CCA / EAC / EAC / cULus Recognized / cULus Recognized


PCB terminal block - MKDS 3/ 8 - 1711084

Approvals

Ex Approvals

Approvals submitted

Approval details

CSA 		
	B	D
mm ² /AWG/kcmil	28-12	28-12
Nominal current I _N	10 A	10 A
Nominal voltage U _N	300 V	300 V

SEV	
mm ² /AWG/kcmil	4
Nominal voltage U _N	250 V

GL

CCA	
mm ² /AWG/kcmil	4
Nominal voltage U _N	250 V

EAC

EAC

cULus Recognized		
	B	D
mm ² /AWG/kcmil	30-12	30-12
Nominal current I _N	15 A	10 A

PCB terminal block - MKDS 3/ 8 - 1711084


Approvals

	B	D
Nominal voltage UN	300 V	300 V




Drawings

Drilling diagram



Dimensional drawing

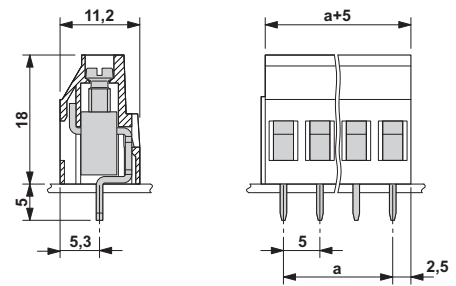

PCB terminal block - MKDS 3/ 8 - 1711084

Diagram

