

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1718560005](#)  
**Status:** **Active**  
**Overview:** [KK® Interconnect System - Molex](#)  
**Description:** 2.54mm Pitch, KK 254 RPC Vertical Header with Friction Lock, Tin (Sn) Plating, Pin Length 12.95mm, Bag, 5 Circuits

**Documents:**

<a href="#">3D Model</a>	<a href="#">Product Specification PS-171856-0002-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-6373-001-000 (PDF)</a>
<a href="#">Product Specification PS-171856-0001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**


CSA	LR19980
UL	E29179

**General**

Product Family	PCB Headers
Series	<a href="#">171856</a>
3D Viewer	Yes
Application	Board-to-Board, Power, Signal, Wire-to-Board
CURRENT-MAX-NUMERIC	4.0
Comments	See Product Specification for maximum current rating by AWG.  See Product Specification for operating temperature range by material., See Product Specification for maximum current rating by AWG.  See Product Specification for operating temperature range by material.
Overview	<a href="#">KK® Interconnect System - Molex</a>
PITCH-MATING-NUMERIC	2.54
Product Name	KK 254
UPC	887191376417

**Physical**

Breakaway	No
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-1
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Matte Tin
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.567/g
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Plating min - Mating	1.524µm

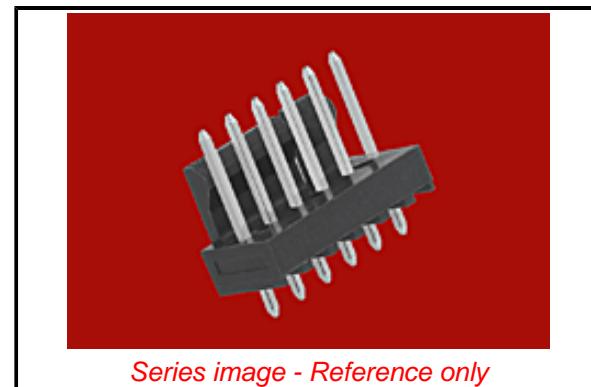

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[171856 Series](#)

**Mates With**

[4455](#) , [2695](#) , [6471](#)

Plating min - Termination	1.524µm
Polarized to Mating Part	Yes
Shrouded	Partial
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C, -40° to +80°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	030
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Packaging Specification	PK-6373-001-000
Product Specification	PS-171856-0001-001, PS-171856-0002-001
Sales Drawing	SD-171856-0001-000, SD-171856-0001-002

This document was generated on 09/11/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**