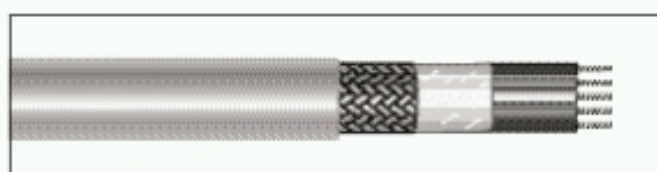


[Home](#)[Master Catalog Online](#)[Distributor Resources](#)[Product Discovery Center](#)[Technical Resources](#)[New and Featured Products](#)[Corporate](#)[International](#)[Distributor Locator](#)[FIT SIZING GUIDE](#)**COMMUNICATION & CONTROL  
MULTICONDUCTOR, BRAID SHIELD  
PE/PVC  
RoHS COMPLIANT  
600 VOLT**[Download this page in PDF format](#)**FIT TUBING RECOMMENDATION****CHARACTERISTICS****Operating Temperature:**

- 20Â°C to 60Â°C

**Voltage Rating:**

- 600 Volt

**Color Description:**

- Color Code: Chart H [Page 376](#)
- Jacket Color: Gray

**Product Description:**

- Conductor: Stranded [Tinned Copper](#)
- Insulation : Color-Coded [Polyethylene \(PE\)](#)
- Wrap: Clear [Polyester](#)
- Shield : Braided [Tinned Copper](#) (85% Coverage)
- Jacket: PVC

**20 AWG (0,52mm<sup>2</sup>), 26/34 (6x0,16mm), Insulation Thickness: 0.015" (0,38mm) PE**

Alpha Part No.	No. of Cond.	Jacket Thickness		Diameter	
		Inches	mm	Inches	mm
<a href="#">1712</a>	2	0.030	0,76	0.24	6,0
<a href="#">1713</a>	3	0.035	0,88	0.25	6,3
<a href="#">1715</a>	4	0.035	0,88	0.26	6,6
<a href="#">1716</a>	5	0.035	0,88	0.27	6,9
<a href="#">1717</a>	6	0.035	0,88	0.30	7,6
<a href="#">1719</a>	8	0.035	0,88	0.33	8,3
<a href="#">1721</a>	10	0.035	0,88	0.37	9,5
<a href="#">1723</a>	12	0.035	0,88	0.38	9,6
<a href="#">1726</a>	15	0.035	0,88	0.41	10,4
<a href="#">1728</a>	20	0.035	0,88	0.45	11,5

**AVAILABILITY**

- 100 ft (30,5m), 500 ft (152m), 1000 ft (305m) put-ups

**SPECIFICATIONS:**

- RoHS Compliant

Email: [info@alphawire.com](mailto:info@alphawire.com)

Toll Free: 1-800-52 ALPHA | Telephone: 908-925-8000 | Fax: 908-925-6923

Europe/UK Telephone: +44 (0) 800 288 8809 | Europe/UK Fax: +44 (0) 1932 772433

**Master Catalog Page**

199



Copyright Â© 2009 Alpha Wire Company ALL RIGHTS RESERVED.

Use of this Web Site indicates you accept the [Terms of Use](#) listed in the [Legal Information and Terms Of Use](#) Document.