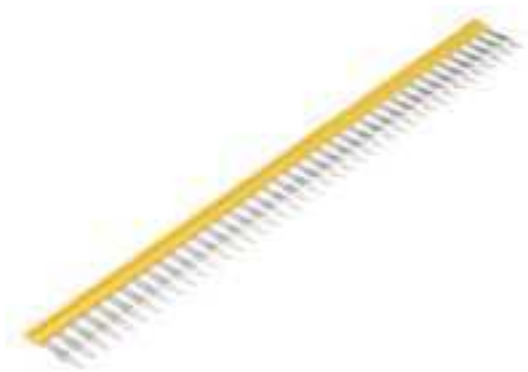


Accessories
ZQV 4N/41

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image**Spring connection with tension clamp Technology**

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Type	ZQV 4N/41
Order No.	1758270000
Version	Accessories, Cross-connector, 32 A
GTIN (EAN)	4032248169801
Qty.	10 pc(s).

Creation date August 15, 2020 11:08:46 PM CEST

Catalogue status 24.07.2020 / We reserve the right to make technical changes.

Data sheet

**Accessories
ZQV 4N/41**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	2.8 mm	Width (inches)	0.11 inch
Height	248.8 mm	Height (inches)	9.795 inch
Depth	25.7 mm	Depth (inches)	1.012 inch
Net weight	2 g		

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Type of fixing	Plugged
----------------	---------

Dimensions

Pitch in mm (P)	6.1 mm
-----------------	--------

Rating data

Rated current	32 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
eClass 9.0	27-14-11-40	eClass 9.1	27-14-11-40
eClass 10.0	27-14-11-40	UNSPSC	30-21-18-01

Product information

Product information Attention: not finger-safe; not suitable for ATEX use Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used

Approvals

Approvals	
-----------	-------------------------------------------------------------------------------------

ROHS	Conform
------	---------

Data sheet**Accessories**
ZQV 4N/41

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Downloads**

Approval/Certificate/Document of Conformity	EAC certificate
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks
