

FAST AND EASY FAULT FINDING

180XL VISUAL FAULT LOCATOR

///// EFFICIENT.

Quickly and easily locate high losses and faults in fiber optic cables.

EXTENDED REACH.

Up to 7km measurement range.

////// VERSATILE.

Pulsed and CW mode of operations.








180XL VISUAL FAULT LOCATOR

SPECIFICATIONS:

Wavelength	650nm +/-10nm
Emitter Type	Fabry Perot
Output Power	0dBm
Laser Classification	Class 2
Range	7km
Modes of Operation	CW and 2Hz Modulation
Method of Display Operation	Red/Green LED
Fiber Type	Singlemode, Multimode
Connector Interface	2.5mm Universal, Optional 1.25mm adapter
Battery	AA (2 included)
Battery Life	80 Hours with 3.9Wh Batteries
Weight	0.26lbs, (120g) (not including batteries)
Dimensions	7.08" x 0.91" Dia (180mm x 23mm Dia)
Operating Temperature	-10°C to +45°C
Storage Temperature	-40°C to +70°C
Certifications	CE, CDRH, RoHS and EAC



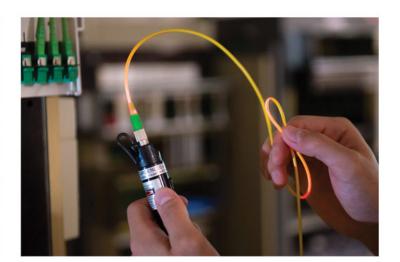

ORDERING INFORMATION:

CAT. NO.	UPC NO.	DESCRIPTION
180XL	03578	Visual Fault Locator
1.25MM ADAPTER	03579	1.25mm Adapter for LC and MU connectors

1390 Aspen Way Vista, CA • 92081

Latin America Phone : 1.760.510.0558 | EMEA Phone: +44 (0) 1633 627710 @2018 Greenlee Inc. • An ISO 9001 Company

EMEA Address: Greenlee Communications Limited \bullet Brecon House, William Brown Close, Cwmbran \bullet NP44 3AB, UK

