

## Base strip - PTSM 0,5/ 4-HH0-2,5-SMD WH R32 - 1814935

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 4, Pitch: 2.5 mm, Color: white, Contact surface: Tin, Mounting: SMD soldering



The illustration shows a 3-position version

### Why buy this product

- ✓ White design: Stable color when welding and during use
- ✓ Designed for integration into the SMT soldering process
- ✓ Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- ✓ Additional solder anchors reduce the mechanical strain on the soldering spots



### Key Commercial Data

Packing unit	1 STK
Minimum order quantity	600 STK
Weight per Piece (excluding packing)	1.330 g
Custom tariff number	85369010
Country of origin	Germany

### Technical data

#### Dimensions

Length	7.5 mm
Pitch	2.50 mm
Dimension a	7.5 mm
Constructional height	5 mm
Height	5 mm
Length of the solder pin	2 mm

#### General

# Base strip - PTSM 0,5/ 4-HH0-2,5-SMD WH R32 - 1814935

## Technical data

### General

Range of articles	PTSM 0,5/..-HH-SMD WH
Insulating material group	I
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	125 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	6 A
Maximum load current	6 A
Insulating material	HT PA
Flammability rating according to UL 94	V0
Color	white
Number of positions	4

### Standards and Regulations


Connection in acc. with standard	EN-VDE
	UL
Flammability rating according to UL 94	V0

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Drilling diagram




Dimensional drawing

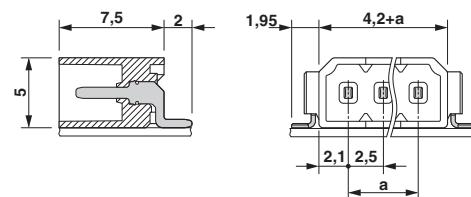

# Base strip - PTSM 0,5/ 4-HH0-2,5-SMD WH R32 - 1814935

Diagram

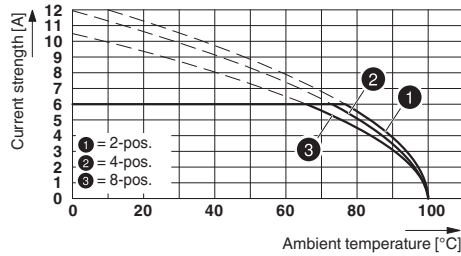

Derating curve for: PTSM 0,5/...P-2,5 with PTSM 0,5/...HH-2,5-SMD R..

## Approvals

### Approvals

Approvals

UL Recognized / UL Recognized / EAC

Ex Approvals

### Approval details

UL Recognized <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> FILE E 60425	
	B
Nominal current I <sub>N</sub>	5 A
Nominal voltage U <sub>N</sub>	150 V

UL Recognized <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> FILE E 118976	
	B
Nominal current I <sub>N</sub>	5 A
Nominal voltage U <sub>N</sub>	150 V

EAC B.01742
-------------

