

V-Ms-Ex-d



Metr.



II 2G 1D Ex d IIC

For the international certificates
please see page 170 or our homepage
www.hummel.com

Material	Nickel plated brass
Protection	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
O-Ring	Buna-N / FPM / VMQ
Operating Temperature	- 20 °C – 95 °C (-4 °F – 203 °F) (Buna-N) - 20 °C – 180 °C (-4 °F – 356 °F) (FPM), - 60 °C – 180 °C (-76 °F – 356 °F) (VMQ)

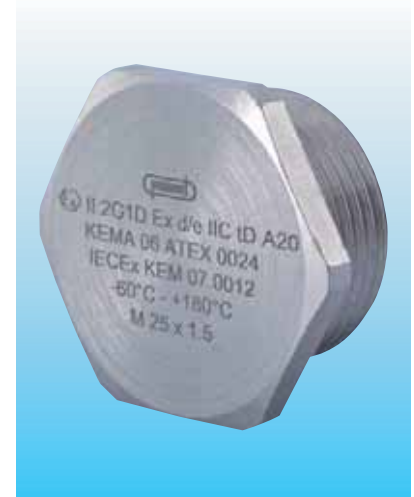

AG	GL mm	H mm	⌀ mm	Number	Number	Number
				Buna-N -20 °C – 95 °C (-4 °F – 203 °F)	FPM -20 °C – 180 °C (-4 °F – 356 °F)	VMQ -60 °C – 180 °C (-76 °F – 356 °F)
M 12 x 1,5	12	17	14	1.875.1200.50	1.876.1200.50	1.877.1200.50
M 16 x 1,5	12	16	19	1.875.1600.50	1.876.1600.50	1.877.1600.50
M 20 x 1,5	12	15,5	22	1.875.2000.50	1.876.2000.50	1.877.2000.50
M 25 x 1,5	12	15,5	30	1.875.2500.50	1.876.2500.50	1.877.2500.50
M 32 x 1,5	12	16,5	41	1.875.3200.50	1.876.3200.50	1.877.3200.50
M 40 x 1,5	12	17	46	1.875.4000.50	1.876.4000.50	1.877.4000.50
M 50 x 1,5	12	18	55	1.875.5000.50	1.876.5000.50	1.877.5000.50
M 63 x 1,5	12	18,5	70	1.875.6300.50	1.876.6300.50	1.877.6300.50