
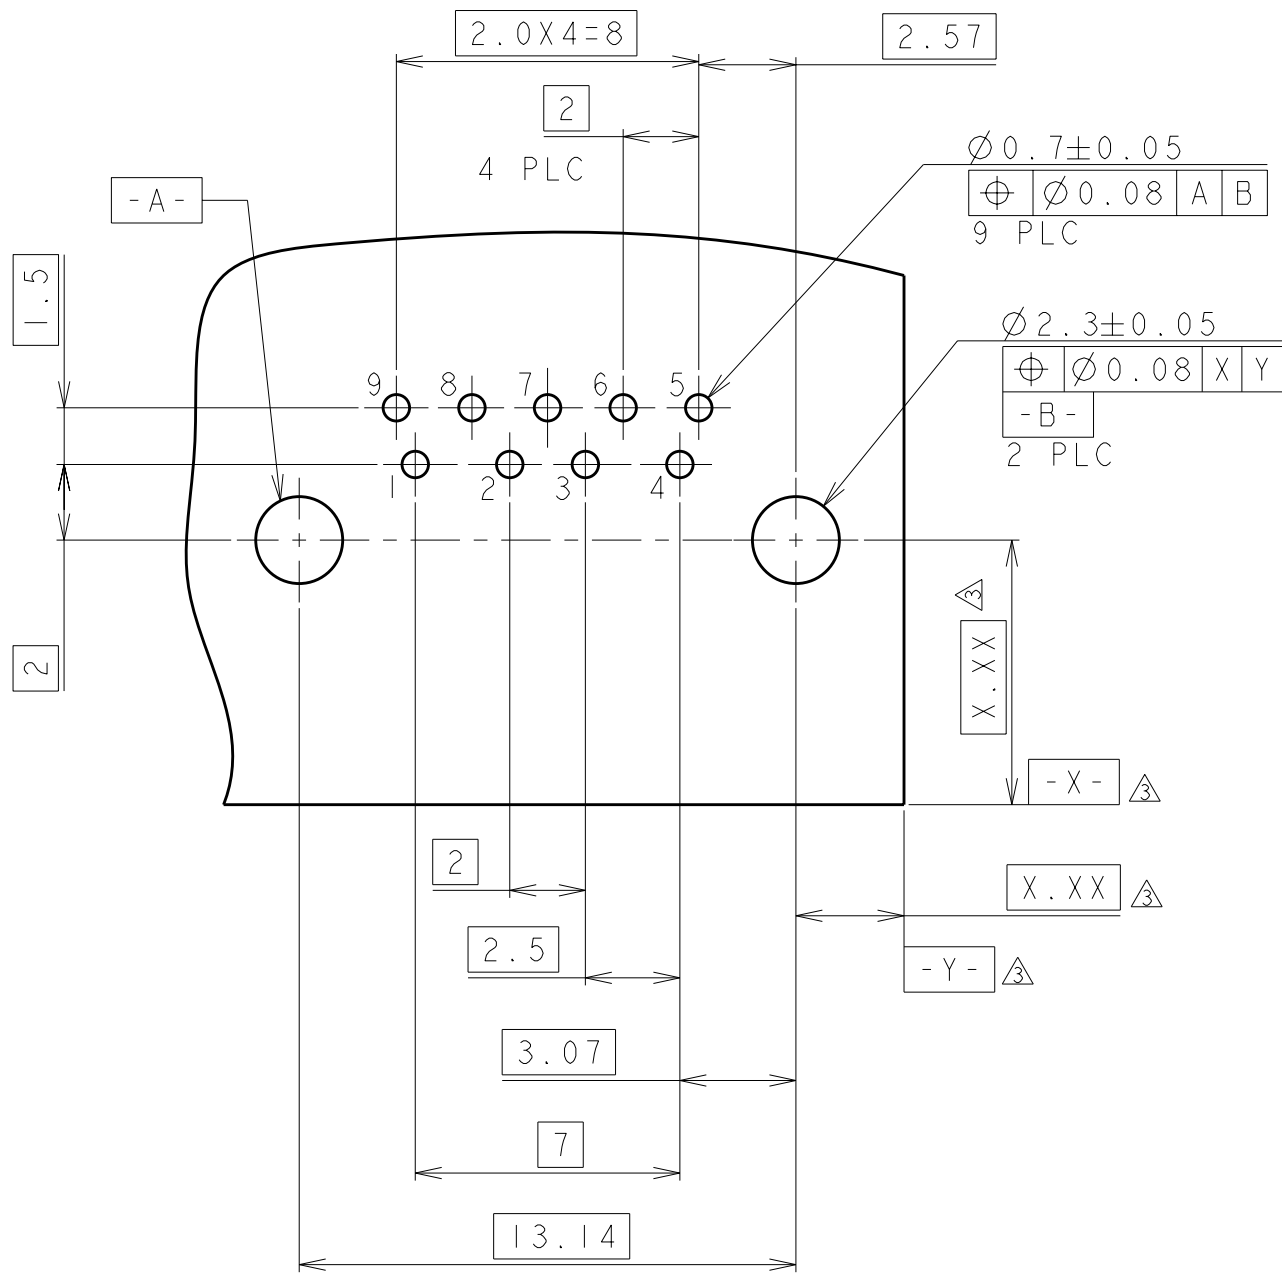
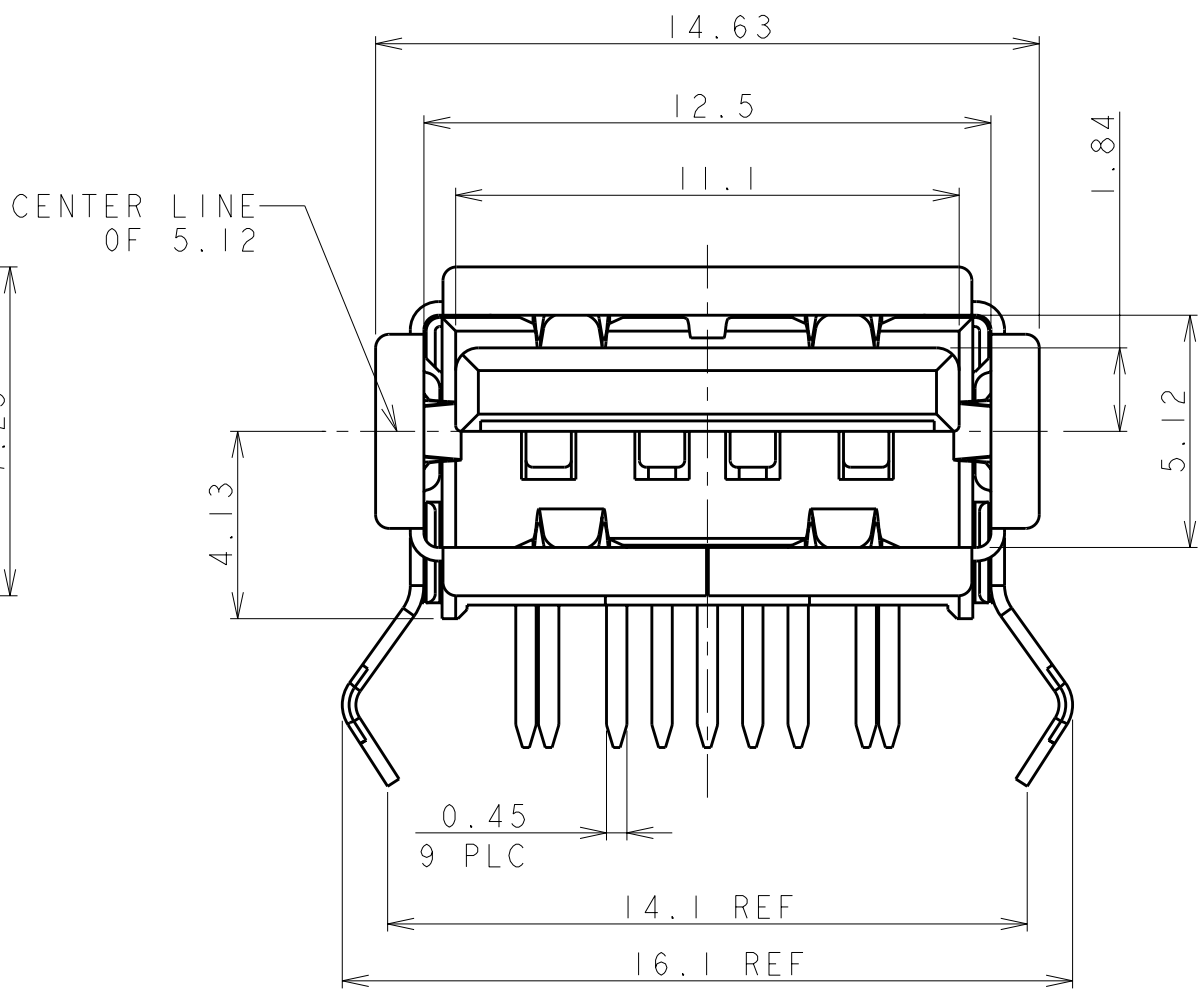


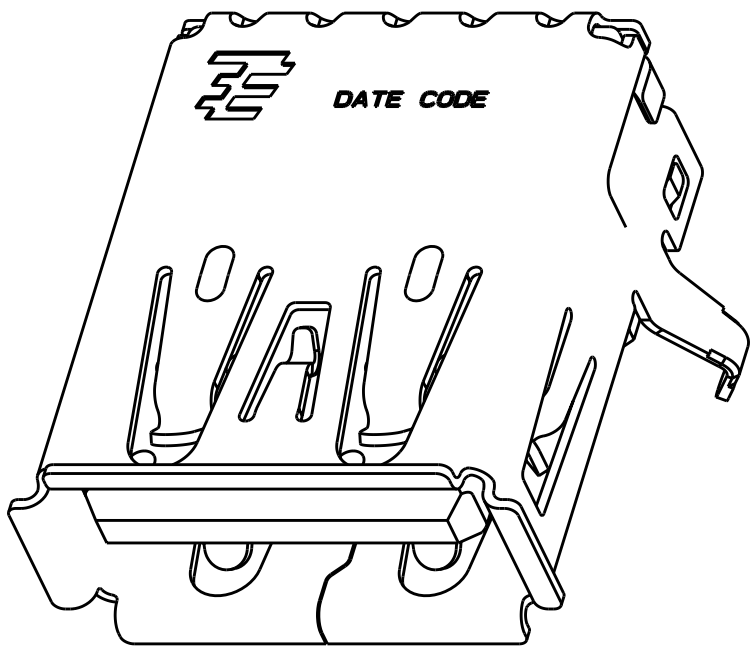

△ RECOMMENDED PCB LAYOUT
(CONNECTOR MOUNTING SIDE VIEW)

SHELL AND CONTACTS: COPPER ALLOY
HOUSING: THERMOPLASTIC, BLUE

CONTACT: 0.76um MIN GOLD OR GOLD FLASHED OVER 0.76um MIN Pd-Ni
ON MATING AREA, 2.54um MIN MATTE TIN ON SOLDER TAILS,
1.27um MIN NICKEL UNDER PLATING
SHELL: TIN OVER NICKEL PLATING

PIN NO.	1	2	3	4	5	6	7	8	9
SIGNAL NAME	VBUS	D-	D+	GND	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 2.0 CONTACT PIN				USB 3.0 CONTACT PIN				

P / N : 1932258 - 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 19SEP2010 FRANKS.LEE CHK 19SEP2010 MARTIN.LI APVD 19SEP2010 STEVEN.YAO		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.25 1 PLC ± 0.25 2 PLC ± 0.25 3 PLC $\pm$ 4 PLCS $\pm$ ANGLES $\pm 3^\circ$ FINISH		NAME - USB 3.0 TYPE A RECEPTACLE STANDARD TYPE	
		PRODUCT SPEC 108-115001 APPLICATION SPEC 501-115002		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL 		WEIGHT -		A200779 C=1932258 -	
		CUSTOMER DRAWING		SCALE NTS SHEET 1 OF 1 REV A2	