MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH – BASIC

CATALOG LISTING
1SM1 – T2

FOR FACTORY USE ONLY

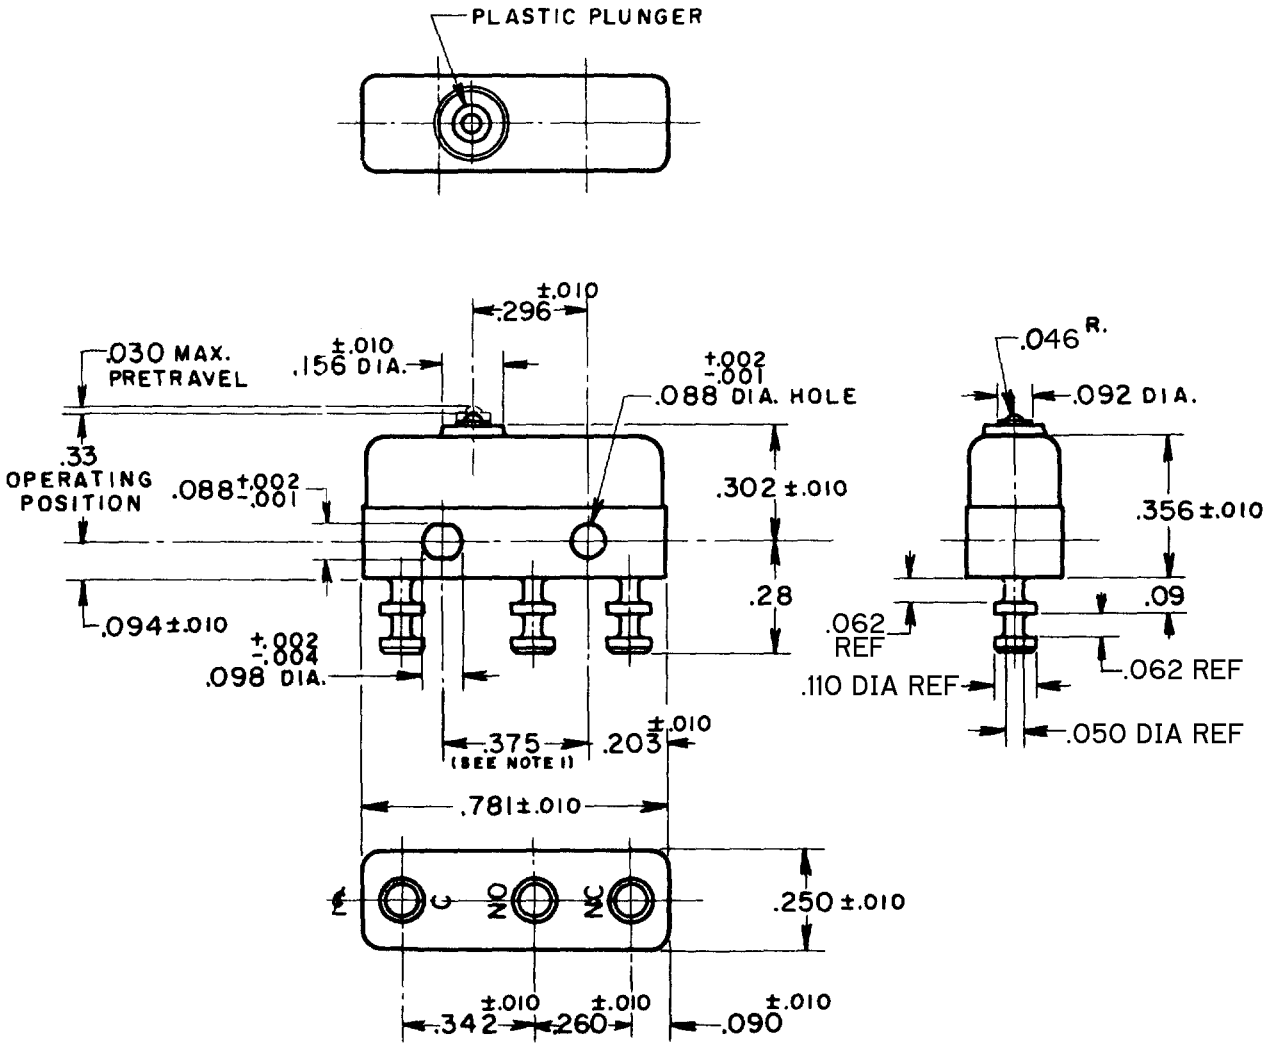

NOTES
1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX. DIA. ON .375±.002 CENTERS.
2-TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE – – – – – – – – 3 – 5 OZ.

RELEASE FORCE – – – – – – – – 1 OZ. MIN.

DIFFERENTIAL TRAVEL – – – – – .004 MAX.

OVERTRAVEL – – – – – – – – – .005 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT	BREAK DISTANCE
S.P.D.T.	

30 VOLTS DC RATING

INDUCTIVE	SEA LEVEL	3 AMPS
	50,000 FT.	2.5 AMPS
RESISTIVE	SEA LEVEL	5 AMPS
	50,000 FT.	5 AMPS
MAXIMUM INRUSH		24 AMPS

L4
5A 250 VAC~

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .006 LB MAX

CATALOG LISTING 1SM1 – T2
PAGE 1 OF 1
ISSUE 7 M
RELEASE NO. SR-7336
REPLACES

REVISIONS

A	CO 12747	R. J. G. 27 AUG 58
B	CO29449	D B W 13 OCT 71
C	CO-77768	S A D 12 JUL 94
D	CO-82802-E	D L T 18 MAR 97
E	CO-95172	J J A 6 JULY 99
F	202272	C S L 30 JAN 01

DRAWN K.L.B. 20, FEB. '58
CHECK GCH 25 FEB. '58
CHECK CNT 20 FEB. '58
RASTER
FO-50376