


# 2015 Series

Pin Header 2.54mmX2.54mm(0.100"X0.100")

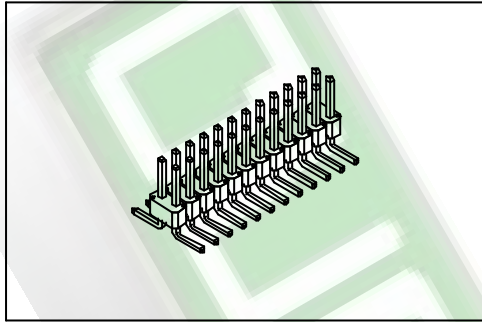

### Material:

**Housing:** High temperature housing withstands IR and VPR soldering methods.

**Contacts:** Brass.

**Plating:** Gold plated over nickel.  
Tin plated over nickel.

### Electrical Characteristics:

**Current Rating:** 1 AMP.

**Insulator Resistance:** 5000M $\Omega$ min. at DC 500V.





**Contact Resistance:** 20m $\Omega$ max. at DC 100mA.

**Operating Temperature:** -65°C~+125°C.

### Features:

- \* Double row Surface Mount.
- \* Low profile insulator 2.54mm (0.100").
- \* Custom design provides wide product flexibility.

Mates with: 1001, 2006, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049.

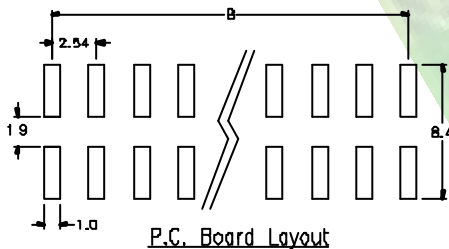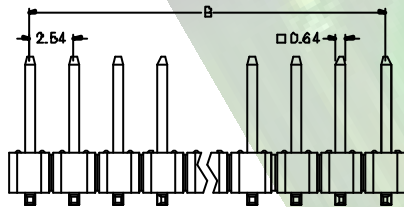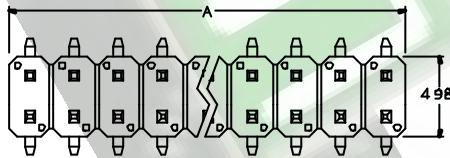

Position	4 Thru 80
Dimension	
A	2.54 X No. of Positions
B	2.54 X No. of Positions - 2.54

## Ordering information

2015- 2 X 40 G D  
 Series Double Row No. of Pin Per Row G: Gold Plated D: S.M.D Type  
 T: Tin Plated

Custom Design: S.M.D. (i.e. 2015-2 X 40 G D /L1 /L2 /L3)  
 L2: Mating length