


GSD

2025-58-9

REVISIONS

ISSUE	CHANGES	
0	ER JCA	32849 02/14/91
1	CN JCA	34749 D 07/16/93
2	CN JJS	37010 C 06/18/96

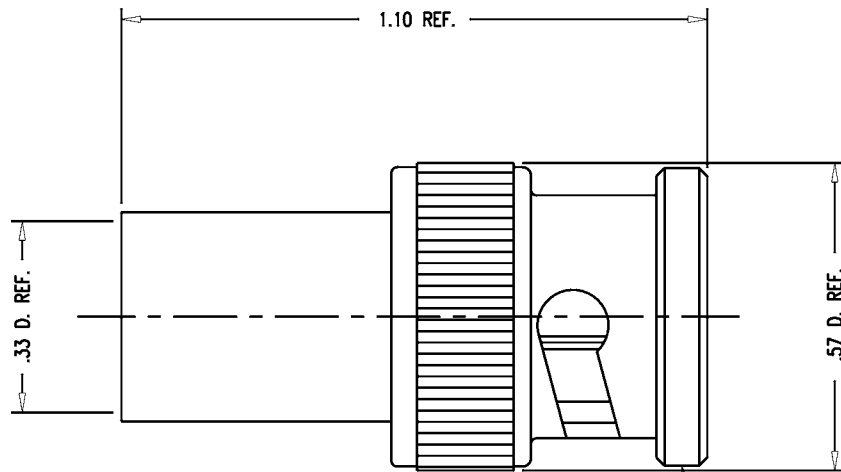

STAMP: KINGS 2025-58-9

NOTES:

1. FOR USE WITH WE 724 AND BELDEN 8281.
2. FOR CABLING INSTRUCTIONS SEE CP-424.
3. FOR CABLE TRIMMING USE KTJ-43 & KTD-30.
4. FOR CRIMPING USE DIE KTH-2010.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MATERIALS:
 - INSULATOR-TEFLON, ASTM-D-1457
 - GASKET-SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ALLOY 220
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - SPRING WASHER }
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
7. FINISHES:
 - SPRING WASHER-SILVER PLATE PER QQ-S-365
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
8. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE-75 OHMS
 - WORKING VOLTAGE-500 VRMS
 - FREQUENCY RANGE-DC TO 2 GHZ

JCA1353

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PLUG, 75 BNC	
DRAWN JCA	DATE 02/14/91
DESIGN GA	DATE 02/20/91
APPR.	DATE

GSD

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2025-58-9