


SD

SD

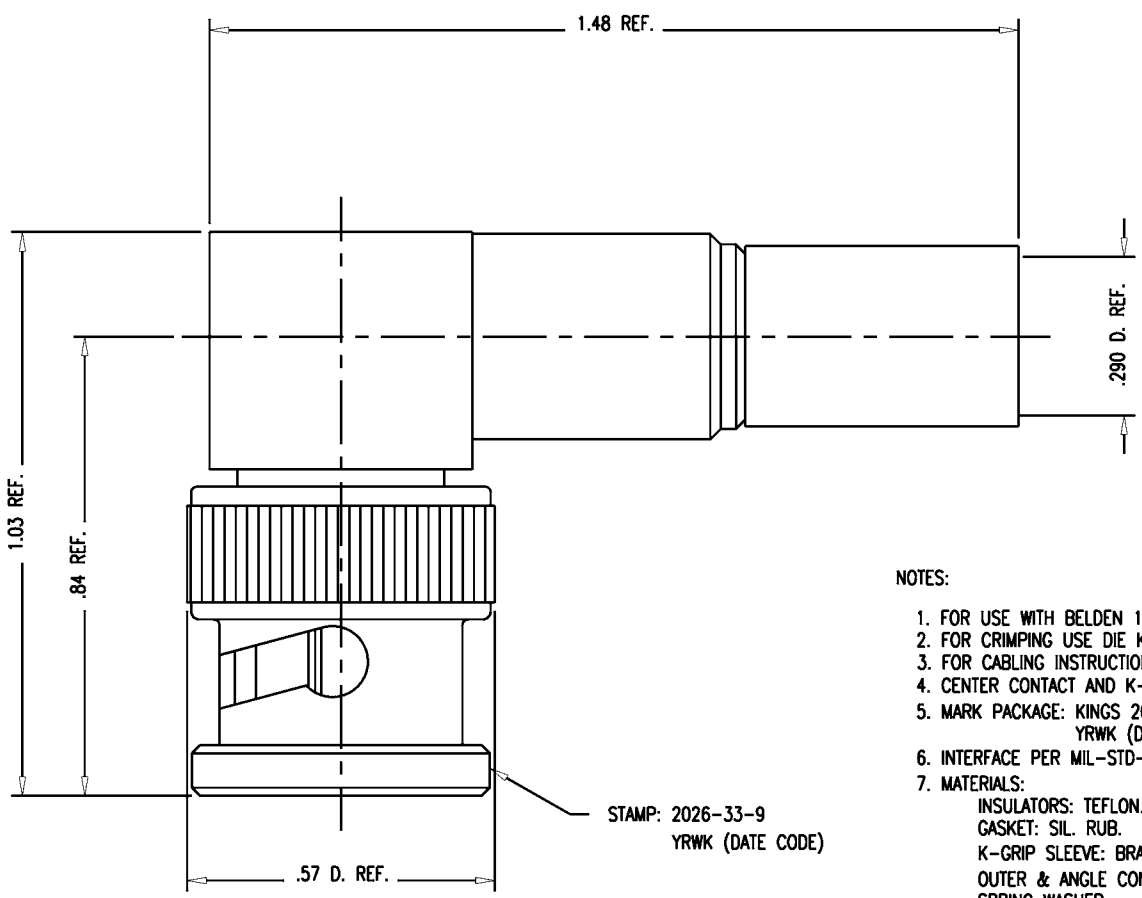

NOTES:

1. FOR USE WITH BELDEN 1694A OR COMM SCOPE 5765 CABLE.
2. FOR CRIMPING USE DIE KTH-2255
3. FOR CABLING INSTRUCTIONS SEE 3-661-5.
4. CENTER CONTACT AND K-GRIP SLEEVE TO BE SUPPLIED UNASSEMBLED.
5. MARK PACKAGE: KINGS 2026-33-9
YRWK (DATE CODE)
6. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
7. MATERIALS:
INSULATORS: TEFLON.
GASKET: SIL. RUB.
K-GRIP SLEEVE: BRASS OR COMMERCIAL BRONZE.
OUTER & ANGLE CONTACTS } BER. COPPER.
SPRING WASHER }
ALL OTHER PARTS: BRASS.
8. FINISHES:
OUTER CONTACT } SILVER PLATE.
SPRING WASHER }
CENTER CONTACTS: GOLD PLATE.
ALL OTHER METAL PARTS: NICKEL PLATE.
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 1 GHz

2026-33-9

REVISIONS	
ISSUE	CHANGES
0	ER 38036 HVN 06/27/00
2026339S	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
PL, ANG, 75 BNC	
DRAWN HVN	DATE 02/09/00
DESIGN HVN	DATE 02/09/00
APPR.	DATE
 ROCK HILL, SOUTH CAROLINA 29730	
2026-33-9	