




**HARNESSING**

**HEAT SHRINK BOOTS**

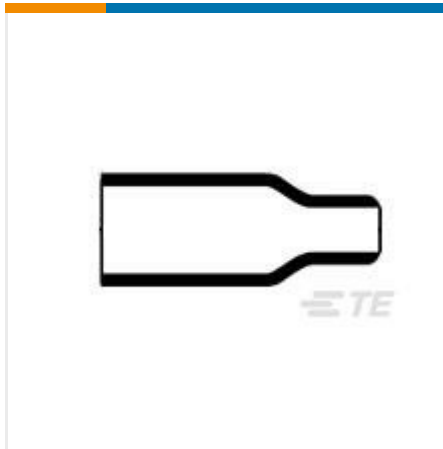

✓ Active

TE CONNECTIVITY (TE)

**202A174-100/180-0**

Raychem | CAP , CRPS

202A174-100/180-0

TE Internal Number: 137624-000

Alias ID: 2-1190998-4

[EU RoHS Compliant](#)

[EU ELV Compliant](#)

**Lipped** No

**Operating Temperature Range (°C)** -30 – 80

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids

**Adhesive Options** /180 Precoat, -80 – 80°C (-112 – 176°F)

**Material Systems Code** 100

[↓ PRODUCT DRAWING](#)  
English

## DOCUMENTATION

Product Drawings

**Boot, Straight, Overexpanded**

PDF

**English**

Product Specifications

Product Specification

**Thermofit Zero Hal Polyolefin Molded Components Halogen-Free, Flame Retarded, Semi-Flexible, Heat-Shrinkable**

PDF

**English**

Product Environmental Compliance

Safety Data Sheet

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**English**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Danish**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Dutch**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**English**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**French**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**German**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Italian**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Norwegian**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Spanish**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Swedish**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**English**

**Ethylene Terpolymer Based Hot-Melt Adhesives**

PDF

**Italian**

**Ethylene Terpolymer Based Hot-Melt Adhesives**

PDF

**German**

**Ethylene Terpolymer Based Hot-Melt Adhesives**

PDF

**Spanish**

**Ethylene Terpolymer Based Hot-Melt Adhesives**

PDF

**English**

**Ethylene Terpolymer Based Hot-Melt Adhesives**

PDF

Dutch

### Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

French

### Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

Swedish

### Ethylene Terpolymer Based Hot-Melt Adhesives

PDF

English

## FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

#### Product Type Features

**Molded Part Type** Molded Boot

#### Configuration Features

**Lipped** No

#### Body Features

**Material Systems Code** 100

**Adhesive Pre-Coat** Yes

#### Dimensions

**Cable Diameter Range** 16 – 48.3 mm [ .63 – 1.9 in ]

**Wire/Cable Outside Diameter** .7 in, .71 in, .787 in, .87 in, .9 in, .94 in, 1 in, 1.02 in, 1.1 in, 18 mm, 20 mm, 22 mm, 24 mm, 26 mm, 28 mm

#### Usage Conditions

**Operating Temperature Range (°C)** -30 – 80

**Flammability** Low Fire Hazard

#### Operation/Application

**Power Cable Accessory** No

#### Industry Standards

**Government Qualified** No

**Approved Standards** BR1326 listed Class G, BS-G-198-5-DF, DEF Std 59-97 Issue 3 Type DF, IEC 62329-3-101

#### Other

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids

**Adhesive Options** /180 Precoat, -80 – 80°C (-112 – 176°F)

**Adhesive Type** Good Water Blocking Pre-Coat Adhesive

Statement of Compliance

**Statement of Compliance**

PDF

---