




**HARNESING**

**HEAT SHRINK BOOTS**

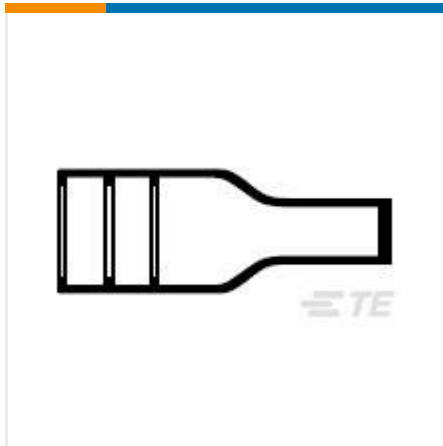

✓ Active

TE CONNECTIVITY (TE)

**202D196-3-0**

Raychem | CAP , CRPS

202D196-3-0

TE Internal Number: 808952-000

Alias ID: 1-1196284-4

[EU RoHS Compliant](#)

[EU ELV Compliant](#)

**Molded Part Shape** Straight

**Lipped** Yes

**Operating Temperature Range (°C)** -55 – 135

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids

**Adhesive Options** S1006 Separate Adhesive, -55°C to +135°C (-67°F to + 275°F), S1017 Separate Adhesive, -20°C to +60°C (-4°F to +140°F), S1030 Separate Adhesive, -80°C to +80°C (-112°F to +176°F)

[↓ PRODUCT DRAWING](#)  
English

## DOCUMENTATION

Product Drawings

**Boot, Straight, With Lips**

PDF

**English**

Product Specifications

Product Specification

**Thermofit Polyolefin Molded Components Flame-Retarded, Semi-Rigid, Heat-Shrinkable**

PDF

**English**

Product Environmental Compliance

Safety Data Sheet

## EPS Heat Shrinkable Polymeric Products

PDF

English

## EPS Heat Shrinkable Polymeric Products

PDF

French

## EPS Heat Shrinkable Polymeric Products

PDF

German

## EPS Heat Shrinkable Polymeric Products

PDF

Italian

## EPS Heat Shrinkable Polymeric Products

PDF

Norwegian

## EPS Heat Shrinkable Polymeric Products

PDF

Spanish

## EPS Heat Shrinkable Polymeric Products

PDF

Swedish

## EPS Heat Shrinkable Polymeric Products

PDF

Dutch

## EPS Heat Shrinkable Polymeric Products

PDF

Danish

## FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

---

### Product Type Features

**Molded Part Shape** Straight

**Molded Part Type** Molded Boot

---

### Configuration Features

**Lipped** Yes

---

### Body Features

**Material Systems Code** 10

**Adhesive Pre-Coat** No

---

## Dimensions

**Wire/Cable Outside Diameter** 1.1 in, 1.18 in, 1.26 in, 1.34 in, 1.42 in, 1.5 in, 1.57 in, 1.69 in, 1.81 in, 28 mm, 30 mm, 32 mm, 34 mm, 36 mm, 38 mm, 40 mm, 43 mm, 46 mm

**Connector or Backshell Outside Diameter** 2.52 in, 2.64 in, 2.76 in, 2.87 in, 2.99 in, 3.15 in, 64 mm, 67 mm, 70 mm, 73 mm, 76 mm, 80 mm

---

## Usage Conditions

**Operating Temperature Range (°C)** -55 – 135

---

## Industry Standards

**Approved Standards** BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS 85049/140, SAE AS I 81765/1, Type I, UL 224, File E85381

---

## Other

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids

**Adhesive Options** S1006 Separate Adhesive, -55°C to +135°C (-67°F to + 275°F), S1017 Separate Adhesive, -20°C to +60°C (-4°F to +140°F), S1030 Separate Adhesive, -80°C to +80°C (-112°F to +176°F)

## Statement of Compliance

**Statement of Compliance**

PDF