




HARNESSING

HEAT SHRINK BOOTS

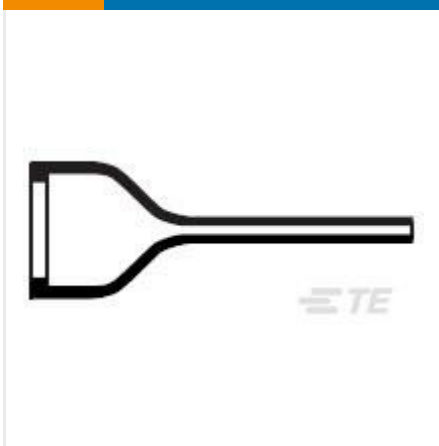

✓ Active

TE CONNECTIVITY (TE)

202D932-12-00-0

Raychem

202D932-12-00-0

TE Internal Number: 811286-000

Alias ID: 9-1196307-9

[EU RoHS Compliant](#)

[EU ELV Compliant](#)

Molded Part Shape Straight

Lipped Yes

Operating Temperature Range (°C) -55 – 200

Adhesive Options S1255-04 Separate Adhesive, -55°C to +200°C (-67°F to +392°F)

Material Systems Code 200

[↓ PRODUCT DRAWING](#)
English

DOCUMENTATION

Product Drawings

Boot, Straight

PDF

English

Product Specifications

Product Specification

Raychem Fluoro Elastomer Molded Components Flame-Retarded, Flexible, Heat-Shrinkable

PDF

English

Product Environmental Compliance

Safety Data Sheet

Heat-Shrinkable Fluoropolymer Products

PDF

English

Heat-Shrinkable Fluoropolymer Products

PDF

German

Heat-Shrinkable Fluoropolymer Products

PDF

French

Heat-Shrinkable Fluoropolymer Products

PDF

Dutch

Heat-Shrinkable Fluoropolymer Products

PDF

Italian

Heat-Shrinkable Fluoropolymer Products

PDF

Spanish

Heat-Shrinkable Fluoropolymer Products

PDF

Swedish

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Shape Straight

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Body Features

Material Systems Code 200

Adhesive Pre-Coat No

Dimensions

Wire/Cable Outside Diameter .177 in, .18 in

Connector or Backshell Outside Diameter .94 in, 24 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 200

Operation/Application

Power Cable Accessory No

Industry Standards

Approved Standards SAE AS I 81765/4

Other

Adhesive Options S1255-04 Separate Adhesive, -55°C to +200°C (-67°F to +392°F)

Adhesive Type Adhesive Purchased Separately

Statement of Compliance

Statement of Compliance

PDF
