
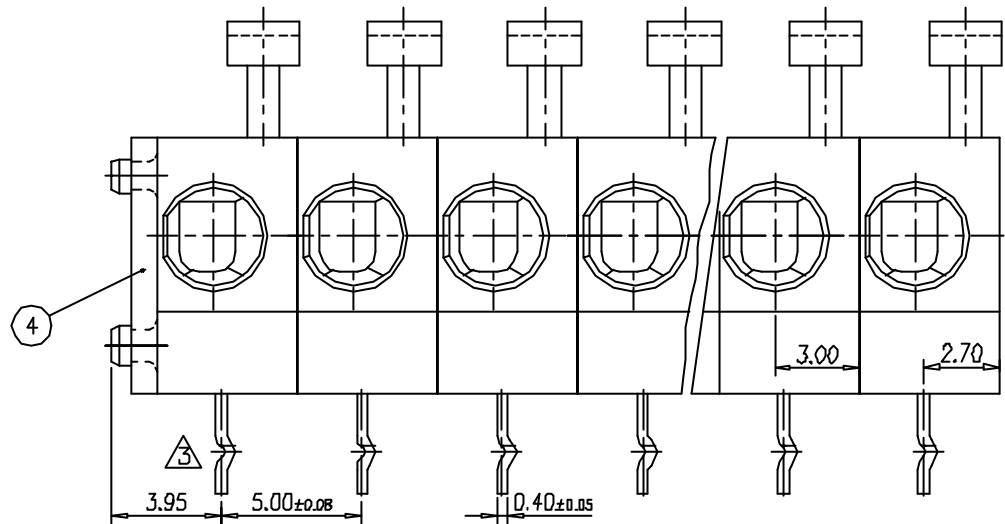
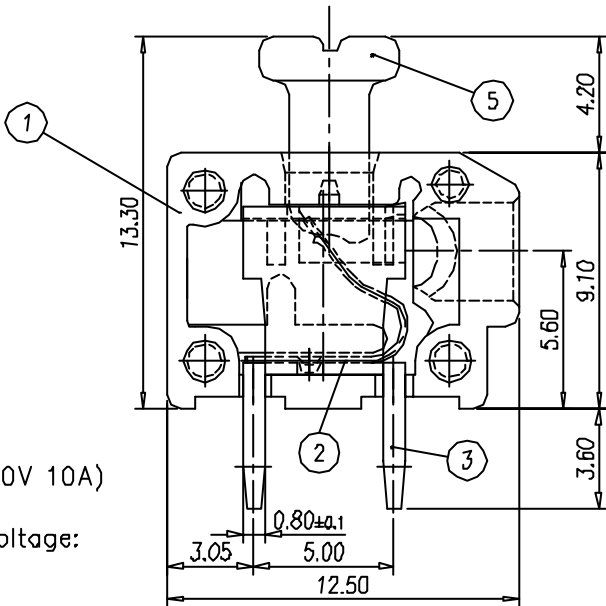


P.C.B. LAYOUT(REF)

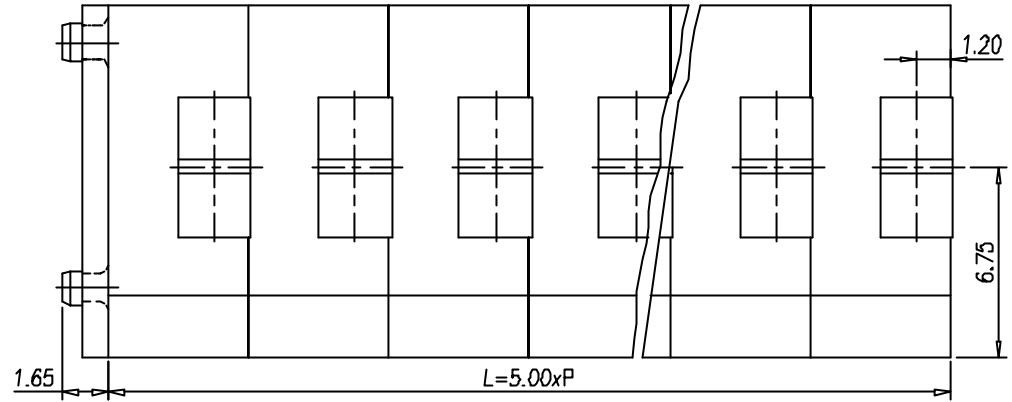

NOTES:

1. Rating:300V 10A (IEC 250V 10A)
PITCH: 5.00mm
2. Insulation Withstands Voltage:
AC 1500 V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire: 20~14AWG (IEC 1.5mm²)
6. Undimensioned Tolerances:

—	∩	□	0.05/10
⊥	//	≡	0.2/10
PICH ARRAY			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

△4	5	LEVER	0056A5XX00	P	POM	WHITE
△4	4	END COVER	0056A4XX00	1	PA66(V0)	M002 M001
	3	SOLDER PIN	0056B00200	P	COPPER	
	2	CLAMP	0056B00300	P	STEEL	
△4	1	HOUSING	0056A0XX00	P	PA66(V0)	M002 M001

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DWG.		DATE		UNITS	MM SHEET/OF 1/2
CHK.		DATE		SCALE	5:1 (:)
APP.		DATE		NAME	20.4101M/XX
REV.	CONTENT	CHK.	DATE	DWG NO.	

