# Brass Round Standoffs

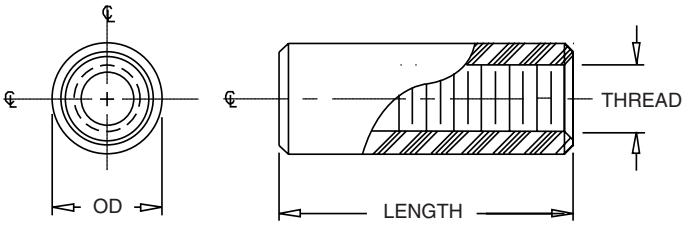


Standard **nickel plating** provides a hard, bright, non-oxidizing surface which will stand up to difficult ambient conditions.

**Options** include:

- Alternative plating finishes such as zinc, silver or gold.
- Odd sizes, taps or threads, plus swage or other shapes.
- Abbatron offers engineering services for special application parts or materials.

| LENGTH | | O.D. | THREAD | | | | |
|---|---|---|---|---|---|---|---|
| | | | #2-56 | #4-40 | #6-32 | #8-32 | #10-32 |
| 0.125 | 1/8 | 3/16 | 9030 | 9045 | | | |
| | | 1/4 | | 8760 | 8761 | 8762 | |
| | | 3/8 | | | | 7902 | 9380A |
| 0.187 | 3/16 | 3/16 | 9031 | 9046 | | | |
| | | 1/4 | | 8763 | 8764 | 8765 | |
| | | 3/8 | | | | 7905 | 9380B |
| 0.25 | 1/4 | 3/16 | 9032 | 9047 | | | |
| | | 1/4 | | 2370 | 2120 | 2125 | |
| | | 3/8 | | | | 7908 | 9380C |
| 0.312 | 5/16 | 3/16 | 9033 | 9048 | | | |
| | | 1/4 | | 8766 | 8767 | 8768 | |
| | | 3/8 | | | | 7911 | 9380D |
| 0.375 | 3/8 | 3/16 | 9034 | 9049 | | | |
| | | 1/4 | | 2371 | 2121 | 2126 | |
| | | 3/8 | | | | 7914 | 9380E |
| 0.437 | 7/16 | 3/16 | 9035 | 9050 | | | |
| | | 1/4 | | 8769 | 8770 | 8771 | |
| | | 3/8 | | | | 7917 | 9380F |
| 0.5 | 1/2 | 3/16 | 9036 | 9051 | | | |
| | | 1/4 | | 2372 | 2122 | 2127 | |
| | | 3/8 | | | | 7920 | 9380G |
| .562 | 9/16 | 3/16 | 9037 | 9052 | | | |
| | | 1/4 | | 8772 | 8773 | 8774 | |

| LENGTH | | O.D. | THREAD | | | |
|---|---|---|---|---|---|---|
| | | | #2-56 | #4-40 | #6-32 | #8-32 |
| .625 | 5/8 | 3/16 | 9038 | 9053 | | |
| | | 1/4 | | 8775 | 8776 | 8777 |
| .687 | 11/16 | 3/16 | 9039 | 9054 | | |
| | | 1/4 | | 8778 | 8779 | 8780 |
| .750 | 3/4 | 3/16 | 9040 | 9055 | | |
| | | 1/4 | | 2373 | 2123 | 2128 |
| .812 | 13/16 | 3/16 | 9041 | 9056 | | |
| | | 1/4 | | 8781 | 8782 | 8783 |
| .875 | 7/8 | 3/16 | 9042 | 9057 | | |
| | | 1/4 | | 8784 | 8785 | 8786 |
| .937 | 15/16 | 3/16 | 9043 | 9058 | | |
| | | 1/4 | | 8787 | 8788 | 8789 |
| 1 | 1 | 3/16 | 9044 | 9059 | | |
| | | 1/4 | | 2374 | 2124 | 2129 |
| 1.125 | 1-1/8 | 1/4 | | 8760R | 8761R | 8762R |
| 1.250 | 1-1/4 | | | 8760S | 8761S | 8762S |
| 1.375 | 1-1/3 | | | 8760T | 8761T | 8762T |
| 1.500 | 1-1/2 | | | 8760U | 8761U | 8762U |
| 1.625 | 1-5/8 | | | 8760V | 8761V | 8762V |
| 1.175 | 1-3/4 | | | 8760W | 8761W | 8762W |
| 1.875 | 1-7/8 | | | 8760X | 8761X | 8762X |
| 2 | 2 | | | 8760Y | 8761Y | 8762Y |

| Maximum Thread Depth | | | | |
|---|---|---|---|---|
| Thread Size | 4-40 | 6-32 | 8-32 | 10-32 |
| Thread Length Tapped Thru | 1" | 1" | 1" | 1" |
| Thread Length Tap each end | 1/4" | 7/16" | 7/16" | 1/2" |